


| D-HR SERIES

HIGH INSULATION RESISTANCE, HIGH VOLTAGE RELAYS, 5KV, 7.5KV, 10KV & 15KV

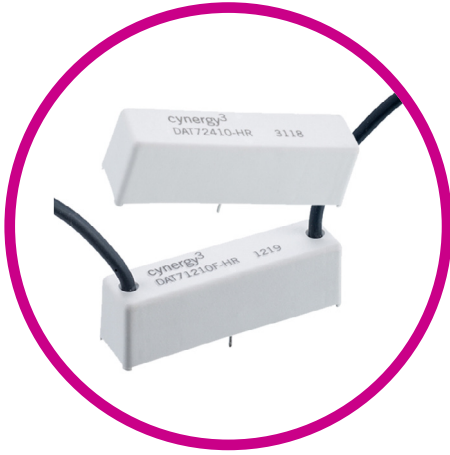

Very high isolation voltages, up to 15kV, are achieved through the use of high vacuum reed switches. Rhodium or tungsten contacts make these relays suitable for high reliability applications, such as cardiac defibrillators, test equipment and high voltage power supplies.

The rhodium contact relays have low contact resistance, whilst the tungsten contact relays can switch higher voltages.

Features

- 5kV, 7.5kV, 10kV or 15kV isolation
- Low contact resistance
- Insulation resistance 1×10^{12} Ohms minimum, 1×10^{14} Ohms typical
- PCB or flying leads connections
- Ideal for sensitive test and measurement circuits which require low leakage current losses

SPECIFICATIONS

Contact	Unit Condition	5kV SPNO		5kV SPNC		7.5kV SPNO		7.5kV SPNC		10kV SPNO		10kV SPNC		15kV SPNO*				
Contact Material		Rhodium	Tungsten	Rhodium	Tungsten	Rhodium	Tungsten	Rhodium	Tungsten	Rhodium	Tungsten	Rhodium	Tungsten	Tungsten				
Isolation across contacts	kV DC or AC peak	5	5	5	5	7.5	7.5	7.5	7.5	10	10	10	10	15				
Switching Power Max.	W	50	50	50	50	50	50	50	50	50	50	50	50	50				
Switching Voltage Max.	V DC or AC peak	1000	3500	1000	3500	1000	5000	1000	5000	1000	7000	1000	7000	10000				
Switching Current Max.	A DC or AC peak	3	2	3	2	3	2	3	2	3	2	3	2	2				
Carry Current Max	A DC or AC peak	4	3	4	3	4	3	4	3	4	3	4	3	2				
Capacitance across contacts	pF coil to screen grounded	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2				
Lifetime Operations	dry switching	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹	10 ⁹				
	50W switching	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶				
Contact Resistance	mΩ max (typical)	50(15)	250(100)	50(15)	250(100)	50(15)	250(100)	50(15)	250(100)	50(15)	250(100)	50(15)	250(100)	250(100)				
Contact	Unit Condition	5kV SPNO			5kV SPNC			7.5kV SPNO			7.5kV SPNC			10kV SPNO		10kV SPNC		15kV SPNO*
Coil		5V	12V	24V	5V	12V	24V	5V	12V	24V	5V	12V	24V	5V	12V	24V	5V 12V 24V	
Must Operate Voltage	V DC	3.7	9	20	3.7	9	20	3.7	9	20	3.7	9	20	3.7	9	20	3.7 9 20	
Must Release Voltage	V DC	0.5	1.25	4	0.5	1.25	4	0.5	1.25	4	0.5	1.25	4	0.5	1.25	4	0.5 1.25 4	
Operate Time	ms diode fitted	3.0	3.0	3.0	2.0	2.0	2.0	3.0	3.0	3.0	2.0	2.0	2.0	3.0	3.0	3.0	3.0 3.0 3.0	
Release Time	ms diode fitted	2.0	2.0	2.0	3.0	3.0	3.0	2.0	2.0	2.0	3.0	3.0	3.0	2.0	2.0	2.0	2.0 2.0 2.0	
Resistance	Ω	28	150	780	38	240	925	28	150	780	38	240	925	28	150	780	16 95 350	

Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)

Relay	Unit Condition	Value
Isolation contact/coil	kV DC or AC peak	17
Insulation resistance min. (typical)	Ω, Between all isolated pins at 1000V, 20°C ±5°C, 45% RH ±10%	10^{12} (10^{14})
Environmental Operating Temperature	°C	-20 to +70


* Form B (n/c) is not available on 15kV models.

DIMENSIONS


All dimensions are in millimeters.
Tolerances acc. to ISO 2768 class m

STANDARD

(e.g. DAT71210-HR)

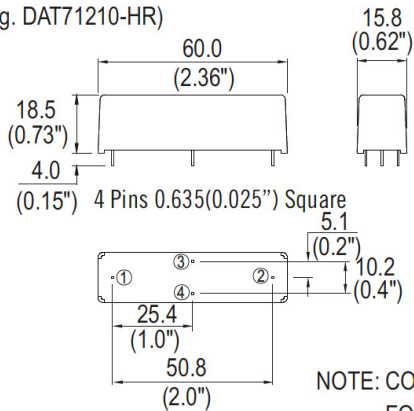


CIRCUIT DIAGRAMS (ALL VARIANTS)



NOTE: COIL POLARITY IS IMPORTANT
FOR FORM B VARIANT ONLY.

FLYING LEAD

(e.g. DAT71210F-HR)

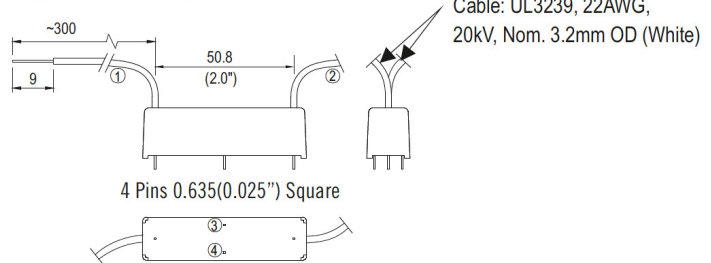

NOTE: PINS WHICH ARE NOT NUMBERED
HAVE NO ELECTRICAL CONNECTION.

Please refer to this document for circuit design notes:-

<https://www.cynergy3.com/blog/reed-relay-application-notes>

	D	A	T	7	12	10	F	-	HR
Reed Switch Size									
Contact Form									
A = n/o B = n/c*									
Contact Material									
R = Rhodium T = Tungsten									
Moulding Ref. No.									
Coil Voltage									
05 = 5Vdc 12 = 12Vdc 24 = 24Vdc									
Isolation between Contacts									
05 = 5kV 75 = 7.5kV 10 = 10kV 15 = 15kV									
Mounting or Connection Style									
No suffix indicates PCB mount F = PCB mount with & coil connection with flying lead HV connection									
Insulation Resistance									
HR = High Insulation Resistance Version									

* Form B (n/c) is not available on 15kV models.

Please refer to this document for circuit design notes:-
<https://www.cynergy3.com/blog/reed-relay-application-notes>

Made in the UK

Page 3

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
 support@sensata.com
 Cynergy3 Components Ltd.
 7 Cobham Road,
 Ferndown Industrial Estate,
 Wimborne, Dorset,
 BH21 7PE, United Kingdom