
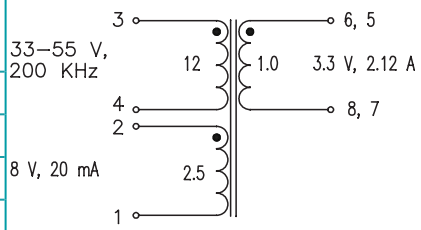
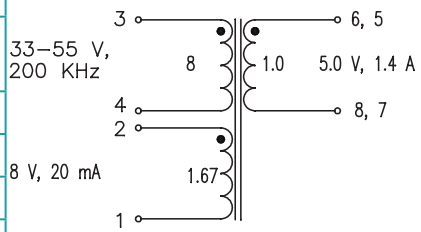
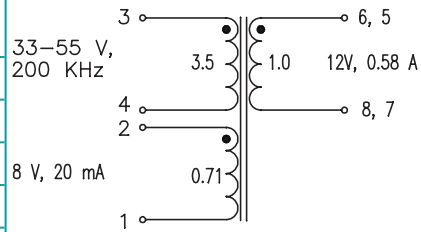
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

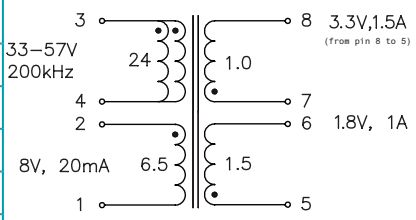
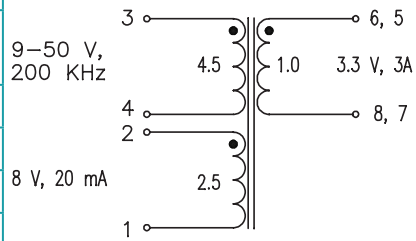
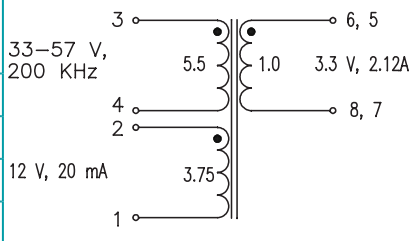
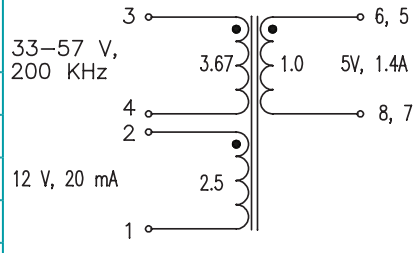


- ***Power Range:*** *up to 30W*
- ***Height:*** *11.45mm Max*
- ***Footprint:*** *15.24mm x 13.1mm Max*
- ***Toplogy:*** *Forward and Flyback*

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C[5]				
PA1133NL	Pri. Inductance	(3-4)	253.4µH ± 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX	
	DCR	(3-4)	420mΩ MAX	
		(6, 5-8, 7)	7.5mΩ MAX	
		(2-1)	115mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	4671.8		
PA1134NL	Pri. Inductance	(3-4)	253.4µH ±10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX	
	DCR	(3-4)	420mΩ MAX	
		(6, 5-8, 7)	16mΩ MAX	
		(2-1)	115mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	4671.8		
PA1135NL	Pri. Inductance	(3-4)	264.1µH ±10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	6 µH MAX	
	DCR	(3-4)	800mΩ MAX	
		(6, 5-8, 7)	45mΩ MAX	
		(2-1)	115mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	4769.7		

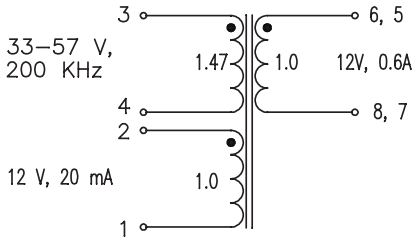
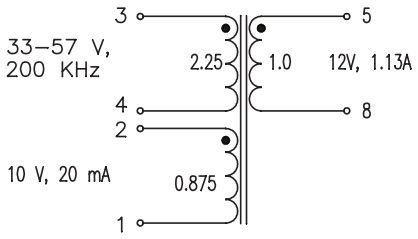
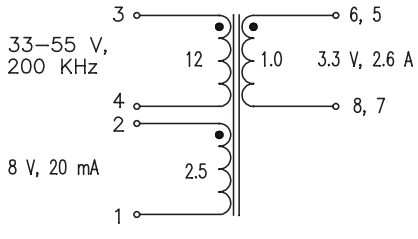
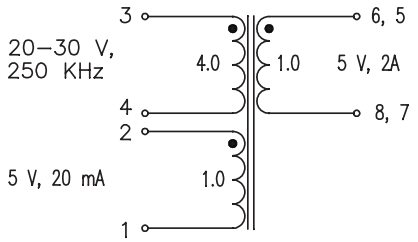
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C[5]				
PA1253NL	Pri. Inductance	(3-4)	253.4 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	12 µH MAX	
	DCR	(3-4)	420 mΩ MAX	
		(2-1)	335 mΩ MAX	
		(5-6)	9.5 mΩ MAX	
		(7-8)	7.2 mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	4671.8		
PA1277NL	Pri. Inductance	(3-4)	20.4µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	1.5 µH MAX	
	DCR	(3-4)	80 mΩ MAX	
		(6, 5-8, 7)	7.5 mΩ MAX	
		(2-1)	150 mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1002.9		
PA1282NL	Pri. Inductance	(3-4)	155 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 µH MAX	
	DCR	(3-4)	530 mΩ MAX	
		(6, 5-8, 7)	31 mΩ MAX	
		(2-1)	900 mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	3117.5		
PA1283NL	Pri. Inductance	(3-4)	155 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 µH MAX	
	DCR	(3-4)	570 mΩ MAX	
		(6, 5-8, 7)	40 mΩ MAX	
		(2-1)	1000 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	3117.5		

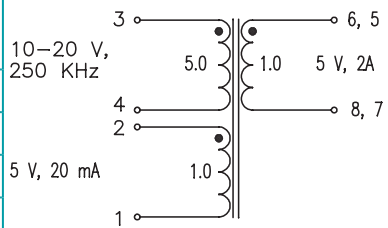
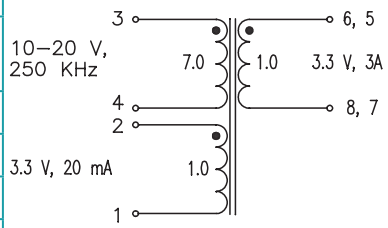
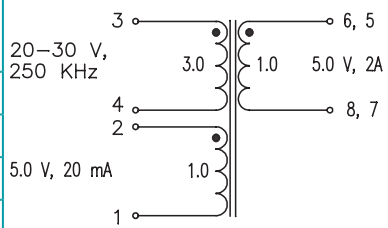
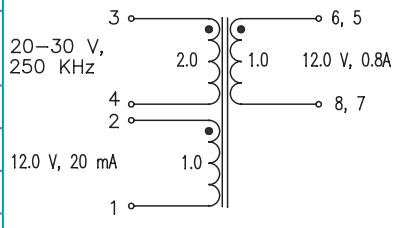
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C[5]				
PA1284NL	Pri. Inductance	(3-4)	155 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 µH MAX	
	DCR	(3-4)	540 mΩ MAX	
		(6, 5-8, 7)	370 mΩ MAX	
		(2-1)	920 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	3117.5		
PA1370NL	Pri. Inductance	(3-4)	20.4 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8,5) shorted	1.5 µH MAX	
	DCR	(3-4)	80 mΩ MAX	
		(5-8)	30 mΩ MAX	
		(2-1)	105 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1002.9		
PA1721NL	Pri. Inductance	(3-4)	185 µH ±10%	 FORWARD TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	10 µH MAX	
	DCR	(3-4)	420 mΩ MAX	
		(6, 5-8, 7)	12 mΩ MAX	
		(2-1)	115 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	3410.8		
PA2362NL	Pri. Inductance	(3-4)	25.2µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.55 µH MAX	
	DCR	(3-4)	135 mΩ MAX	
		(6, 5-8, 7)	11 mΩ MAX	
		(2-1)	115 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
	K1 Factor	1115.0		

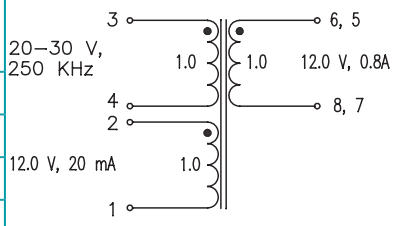
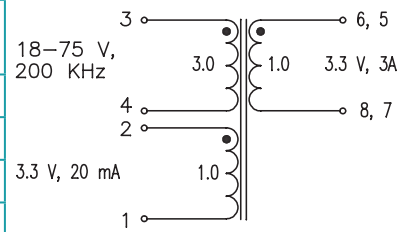
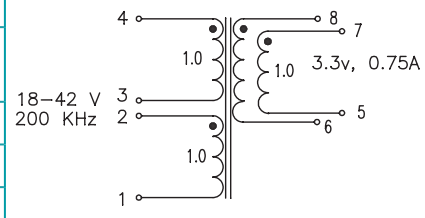
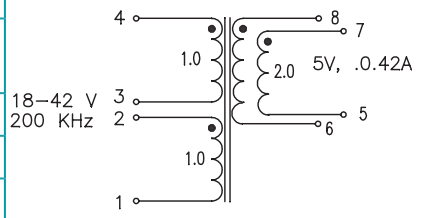
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C[5]				
PA2363NL	Pri. Inductance	(3-4)	25.2 µH ±10%	
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.85 µH MAX	
	DCR	(3-4)	135 mΩ MAX	
		(6, 5-8, 7)	9 mΩ MAX	
		(2-1)	180 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1115.0		**FLYBACK TRANSFORMER**
PA2364NL	Pri. Inductance	(3-4)	25.2µH ±10%	
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	1 µH MAX	
	DCR	(3-4)	145 mΩ MAX	
		(6, 5-8, 7)	7.5 mΩ MAX	
		(2-1)	110 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1059.4		**FLYBACK TRANSFORMER**
PA2454NL	Pri. Inductance	(3-4)	24µH ±10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.75 µH MAX	
	DCR	(3-4)	82 mΩ MAX	
		(6, 5-8, 7)	13 mΩ MAX	
		(2-1)	80 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1179.9		**FLYBACK TRANSFORMER**
PA2455NL	Pri. Inductance	(3-4)	24 µH ±10%	
	Lk. Inductance	(1-4) with (8, 7, 6, 5) shorted	0.6 µH MAX	
	DCR	(3-4)	90 mΩ MAX	
		(6, 5-8, 7)	23 mΩ MAX	
		(2-1)	130 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
	K1 Factor	1179.9		**FLYBACK TRANSFORMER**

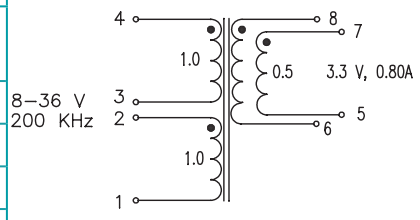
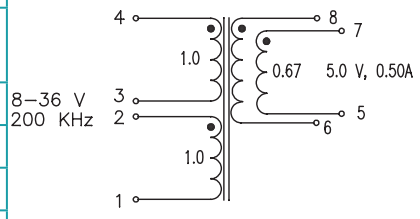
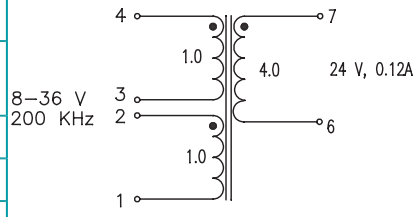
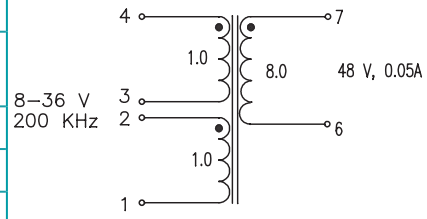
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C[5]				
PA2456NL	Pri. Inductance	(3-4)	24 µH ±10%	
	Lk. Inductance	(3,4) with (8, 7, 6, 5) shorted	0.6 µH MAX	
	DCR	(3-4)	86 mΩ MAX	
		(6, ,5-8, 7)	86 mΩ MAX	
		(2-1)	470 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1179.9		FLYBACK TRANSFORMER
PA2627NL	Pri. Inductance	(3-4)	50.5 µH ±10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	1.4 µH MAX	
	DCR	(3-4)	420 mΩ MAX	
		(6, 5-8, 7)	47 mΩ MAX	
		(2-1)	174 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1241.4		FLYBACK TRANSFORMER
PA3948.001NL	Pri. Inductance	(4-1) with 3,2 shorted	40 µH ±10%	
		(4-1) with 3,2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 µH MAX	
	DCR	(3-4)	410 mΩ MAX	
		(6, 5-8, 7))	140 mΩ MAX	
		(2-1)	140 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
	K1 Factor	1241.4		FLYBACK TRANSFORMER
PA3948.002NL	Pri. Inductance	(4-1) with 3,2 shorted	40 µH ±10%	
		(4-1) with 3.2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 µH MAX	
	DCR	(4-1)	405 mΩ MAX	
		(8-6)	470 mΩ MAX	
		(7-5)	470 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
	K1 Factor	983.3		FLYBACK TRANSFORMER



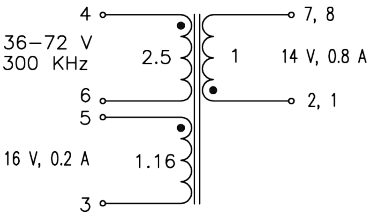

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C – Operating Temperature -40°C to +130°C[5]				
PA3948.003NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 µH ±10%	
		(4-1) with 3, 2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 µH MAX	
	DCR	(4-1)	405 mΩ MAX	
		(8-6)	470 mΩ MAX	
		(7-5)	470 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		FLYBACK TRANSFORMER
PA3948.004NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 µH ± 10%	
		(4-1) with 3, 2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 µH MAX	
	DCR	(4-1)	220 mΩ MAX	
		(8-6)	58 mΩ MAX	
		(7-5)	58 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		FLYBACK TRANSFORMER
PA3948.005NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 µH ±10%	
		(4-1) with 3, 2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.6 µH MAX	
	DCR	(4-1)	220 mΩ MAX	
		(7-6)	1275 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		FLYBACK TRANSFORMER
PA3918.006NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 µH ±10%	
		(4-1) with 3, 2 shorted	32 µH Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.65 µH MAX	
	DCR	(4-1)	220 mΩ MAX	
		(7-6)	3350 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		FLYBACK TRANSFORMER

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C – Operating Temperature -40°C to +130°C[5]				
PB2115NL	Pri. Inductance	(4-6)	25.2 µH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(4-6) with (1,2,3,4,7,8) shorted	1.45 µH MAX	
	DCR	(4-6)	250 mΩ MAX	
		(7, 8-2,1)	3.3 mΩ MAX	
		(7-5)	20 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	1115.0		
PG0686NL	Pri. Inductance	(3-2)	40 µH ± 7%	 FLYBACK TRANSFORMER
	Lk. Inductance	(3-2) with (5, 6, 7, 8) shorted	0.05 µH MAX	
	DCR	(3-2)	98 mΩ MAX	
		(5-7)	50 mΩ MAX	
		(6-8)	65 mΩ MAX	
	Hi-Pot	Pri-Sec	1650 Vrms	
	K1 Factor	1769.9		
PG0721NL	Pri. Inductance	(4-6)	75 µH ±15%	 FLYBACK TRANSFORMER
	Lk. Inductance	(4-6) with (1,2,3,5,7,8) shorted	1 µH MAX	
	DCR	(4-6)	110 mΩ MAX	
		(7,8-2,1)	35 mΩ MAX	
		(5-3)	85 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	4424.8		
PG0855NL	Pri. Inductance	(2-4)	33.1 µH ±15%	 FLYBACK TRANSFORMER
	DCR	(2-4)	140 mΩ MAX	
		(8-6)	115 mΩ MAX	
		(7-5)	40 mΩ MAX	
	Hi-Pot	Pri-Sec	1000 Vrms	
	K1 Factor	1126.6		

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

   Bpk (Gauss) = K1_Factor * Ipk (A)
4. In high volt-sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

   CoreLoss (W) = 2.5E-14 * (Freq_kHz)$^{1.63}$ * (ΔB_Gauss)$^{2.63}$

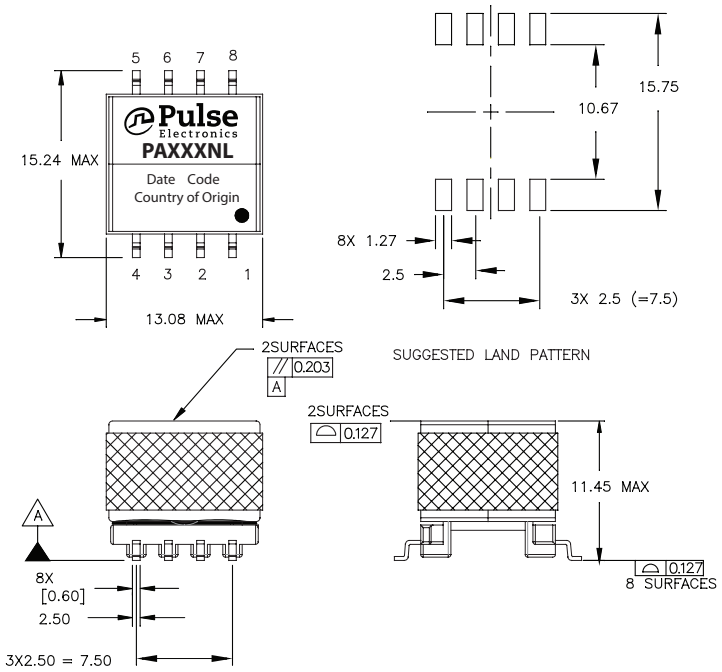
   where ΔB can be calculated as:

   For Flyback Topology: ΔB = K1_Factor * (A)

   For Forward Topology: ΔB = K1_Factor * Volt-µsec
6. Optional Tape & Reel packaging can be ordered by adding a "**T**" suffix to the part number (i.e. PA1136NL becomes PA1136NL**T**). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) an depth (Ko=13.2mm).

Mechanical

PAXXXXNL



For More Information

Pulse Worldwide Headquarters
15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe
Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters
Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R. China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
3 Fraser Street
0428 DUO Tower
Singapore 189352

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia
1F, No.111
Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.