Combined Motion and Presence Detector for Automatic Sliding Doors GUARDIAN 1

- **Overhead sensor for sliding doors**
- **Motion and presence detection in one unit**
- **Digital Video Camera Technology**
- **Easy teach of presence zone**
- **Environmental adaptation**
- **No Crosstalk between sensors**
- **Separate motion and presence output**
- **2 x SPST relay outputs**
- **Supply voltage: 12 to 24 VAC/DC**
- **LED indication for: Power, Motion and Presence**
- **CE, UL325 and TÜV approved**

Baumuster geprüft

Product Description

The GUARDIAN 1 is an overhead sensor for pedestrian sliding doors. The sensor has combined motion and presence (safe) detection zones. The sensor is based on CMOS camera technology and detection on image processing. The motion zone reacts only on movement whereas the presence zone reacts on both movement and presence. The motion zone can be blanked in 3 directions (front, left and right) in order to avoid detection of unwanted objects.
The presence zone is taught into the sensor by recognition of some standard test targets in the setup phase. The presence zone also adapts to the surroundings to work in different weather conditions. The sensor has separate outputs for the motion and presence zones as well as a test input to test the sensor function for each door cycle.

Ordering Key

GUARDIAN 1

Type Selection

Housing size	Ordering no.
210 x 77 x 58 mm	**GUARDIAN1**

Specifications

Rated operational voltage (U_e)	12 - 24 VAC (12 - 24 VCA) RMS incl. ripple 50-60 Hz, ±15% tolerance 12 - 24 VDC (12 - 24 VCC) ±15% tolerance
No load supply current (I_e)	**Typical** / **Max.** 192 mA / 230 mA @ 12V AC 146 mA / 170 mA @ 12V DC 103 mA / 120 mA @ 24V AC 65 mA / 80 mA @ 24V DC
Technology	Digital video camera technology
Power ON delay	5 seconds
Output function	
Safety and Motion Zone	Relay – SPST
Common relay data:	1A DC 30VDC
Operations minimum	600.000 @ 0,5A, 50 VAC/ 30 VDC
Operations minimum	100.000 @ 1A, 30 VDC
Test input	Max. input current 5 mA
Active high:	ON > 9 VAC/VDC OFF < 6 VAC/VDC
Active low:	ON < 6 VAC/VDC OFF > 9 VAC/VDC
Sensitivity	Adjusting in 7 steps
Presence zone reaction time	
Reaction time:	210 ms (20% contrast, object speed 1 m/s, test body CA (DIN18650-1))
Fall time:	500 ms
Motion zone reaction time	
Reaction time:	1,2 s (20% contrast, object speed 1 m/s, test body CA (DIN18650-1))
Fall time:	500 ms
Presence time (Background relearn time)	7 step rotary switch
In accordance with DIN18650	1 min, 5 min.
Not in accordance with DIN18650	10 sec, 30 sec.
Vibration	10 to 150 Hz 0.5 mm/7.5g (IEC 60068-2-6)
Shock	2 x 1 m and 100 x 0.5 m (IEC 60068-2-32)

CARLO GAVAZZI

Specifications (cont.)

Ambient temperature range Operating Store	 -25° to +55°C (-13° to +131°F) -25° to +80°C (-13° to +176°F)
Ambient light	10 lux - 50.000 lux 40 lux - 50.000 lux, TÜV approved, measured at the sensor surface
Contrast	Min. 20% contrast between the floor and object
Motion zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 246 x 204 cm 300 x 249 cm 410 x 340 cm The motion area can be blanked from left, right and front in 7 steps on three rotary switches
Presence zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 42 cm x door width 51 cm x door width 70 cm x door width
Mounting height	1.8 m to 3.0 m
Placement of sensor Horisontal distance from door Vertical distance from door	 max 50 cm in front of the door. The sensor must be able to see the door opening. 10 cm from the top of the door opening
Material Housing and cover Front glass	 ABS Black Clear transparent, polycarbonate.
Connection cable	3 m 8 x 0,14 mm² LIYY grey Max. cable length: 10 m.
Environment protection	IP64 (EN 60529, 60947-1)
Installation category	III (IEC 60664 / 60664A / EN 60947-1)

Pollution degree	3 (IEC 60664 / 60664A / EN 60947-1)
Humidity	0 % to 90 % relative, non condensing
Type of ESPE Type 2	 The sensing functions have to be tested for each door cycle by applying a test signal to the terminals 2+3. See test input.
LED indications Green LED Yellow LED Red LED	 Power ON Motion detected Presence detected For special LED functions see page 3
Rated Insulation voltage	50 VDC
Weight	460 g
Electromagnetic compatibility	In acc. with EMC directive 2004/108/EG Immunity in acc. with EN61326-1 and EN61326-3-1
Marking	CE
TÜV-Approval TÜV NORD Baumuster geprüft	In acc. with machinery directive 2006/42/EC, annex I DIN 18650-1 § 5.7.4, edition 2005 (prEN16005), EN13241-1, EN 12978, edition 2003, EN61508, edition 2001, ENISO13849-1: 2008 cat.2 pl. c for presence detection
UL-Approval c UL us	UL325, CSA-C22.2 No.247

Operation Diagram

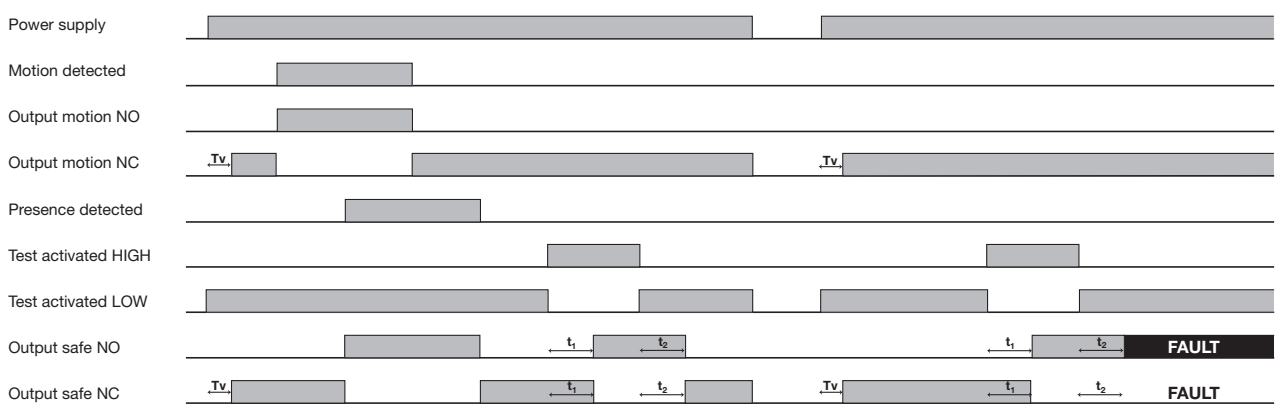

CARLO GAVAZZI

Component Guide

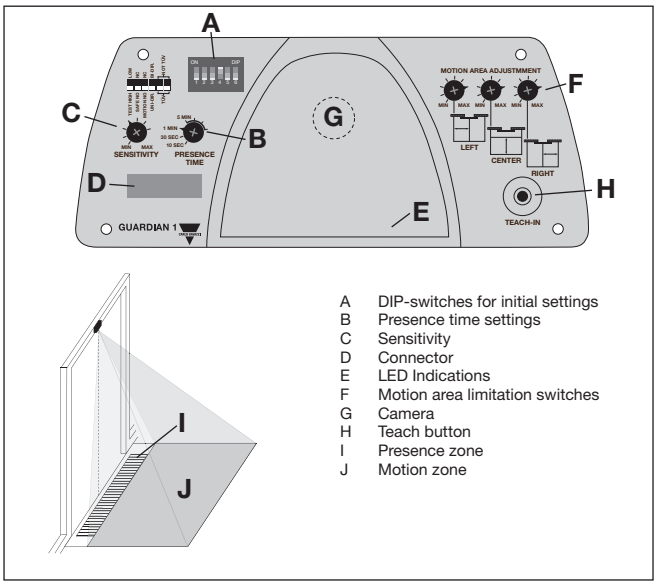

A DIP-switches for initial settings
B Presence time settings
C Sensitivity
D Connector
E LED Indications
F Motion area limitation switches
G Camera
H Teach button
I Presence zone
J Motion zone

Dimensions

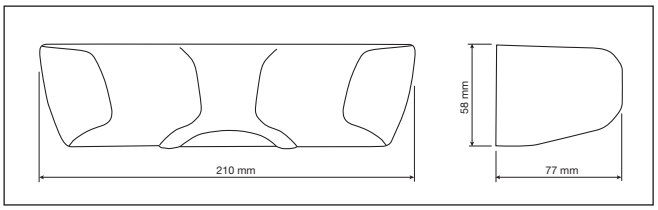

LED Indications

Situation / LED	Yellow	Red	Green
Normal	Motion detected	Presence detected	Power On
No presence zone stored	Running light on all LED's		
Teach mode	Flashing simultaneously		
Background stored	Off	Off	Flashing
Not allowed DIN18650	Off	Flashing	On
Self test failed	Flashing simultaneously		On
Sensor error Contact installer	On	On	Off

Delivery Contents

- GUARDIAN1 door sensor
- User Manual
- Drilling template
- 3 m connection cable with connector
- **Packaging:** Cardboard box

DIP-Switch Settings

Set up the DIP-switches to match the door controller.

DIP-switch 1 - Sensor test input
- Test input Active Low
- Test input Active High

DIP-switch 2 - Safety output
- Normally closed (NC)
- Normally open (NO)

DIP-switch 3 - Motion output
- Normally closed (NC)
- Normally open (NO)

DIP-switch 4 - Direction recognittion
- Bi-directional mode
- Uni-directional mode)

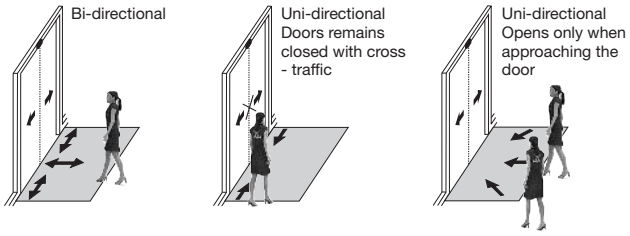

DIP-switch 5 and 6
- Not in accordance with DIN18650-1 (prEN16005)
- In accordance with DIN18650-1 (prEN16005)
- Not valid (red LED flashes and output relays is set in safe mode)
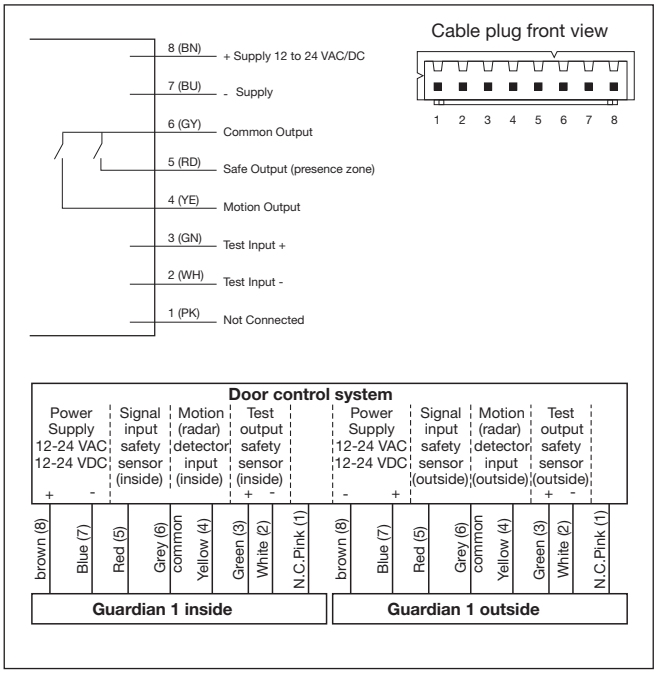
Wiring Diagram