

75 VDC Input PCB Filter

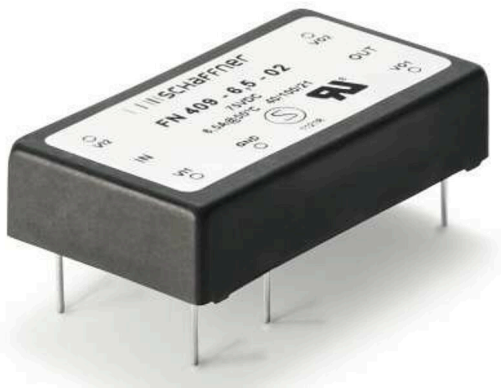

- Rated currents from 3 to 13 A, 75 VDC
- Very compact PCB-mounting design
- Exceptional attenuation performance
- High frequency noise compression

Performance indicators

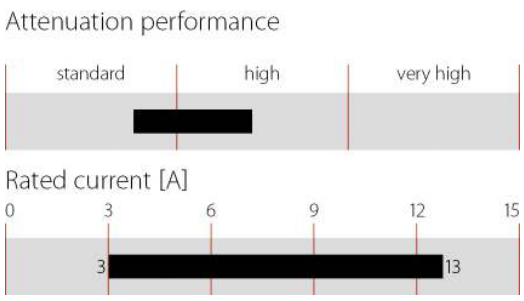

Approvals & Compliances

RoHS

FN 409 PCB filters are designed to surpress common and differential-mode noise on DC voltage lines. The suppression performance is special designed to fulfill the requirements for high frequency switching DC/DC converter modules. FN 409 filters can also be used to filter the output current of switch-mode power supplies in applications with intelligent power distribution.

Features and Benefits

- High common and differential-mode noise suppression
- Rated currents up to 13 A at 75 VDC
- Small form factor
- Good thermal conductance

Typical Applications


- Input or output filter for high frequency DC/DC converters
- DC output filter for switch-mode power supplies
- Computer and office automation equipment
- Telecom equipment
- Input/output filter within DC power distribution networks

Technical Specifications


Maximum continuous operating voltage	75 VAC 75 VDC
Rated currents	3 to 13 A @ 50°C
High potential test voltage	VI1/VI2 –> GND 1500 VDC for 2 sec VI1 –> VI2 100 VDC for 2 sec
Temperature range (operation and storage)	-40 °C to +100 °C (40/100/21)
Flammability corresponding to	UL 94 V-0
Design corresponding to	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
MTBF (Mil-HB-217F)	>4,450,000 h @ 50°C/75 V

Typical electrical schematic

3 and 6.5A types

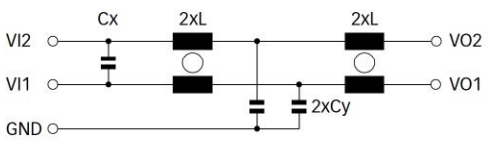

13A types

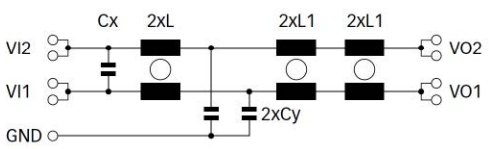

Filter Selection Table


Filter	Rated current @ 50 °C (40 °C)	Inductance*		Capacitance*		DC Resistance* R @ 25 °C per path	Input/Output connections	Weight
		L	L1	Cx	Cy		⊥	
	[A]	[mH]	[mH]	[nF]	[nF]	[mΩ]		[g]
FN 409-3-02	3 (3.2)	2.9		4700	4.7	86	-02	30
FN 409-6.5-02	6.5 (7)	0.5		4700	4.7	18	-02	30
FN 409-13-02	13 (14)	0.08	0.18	4700	4.7	7.8	-02	47

* Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%


Typical Filter Attenuation

Per CISPR 17; A = 50 Ω/50 Ω sym; B = 50 Ω/50 Ω asym; C = 0.1 Ω/100 Ω sym; D = 100 Ω/0.1 Ω sym


3 A types

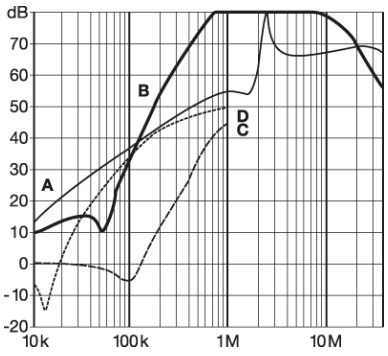

6.5 A types

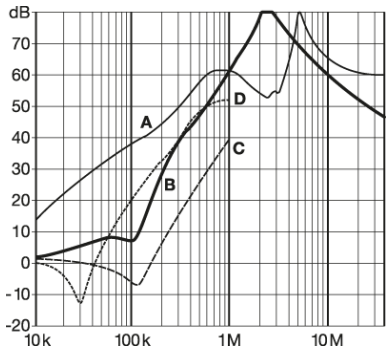


13 A types

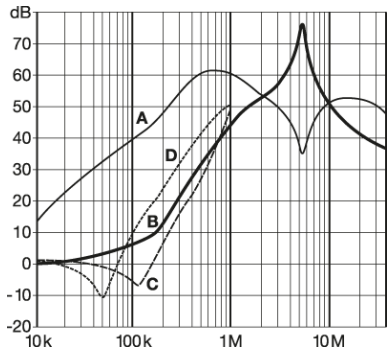


Mechanical Data

3 and 6.5 A types

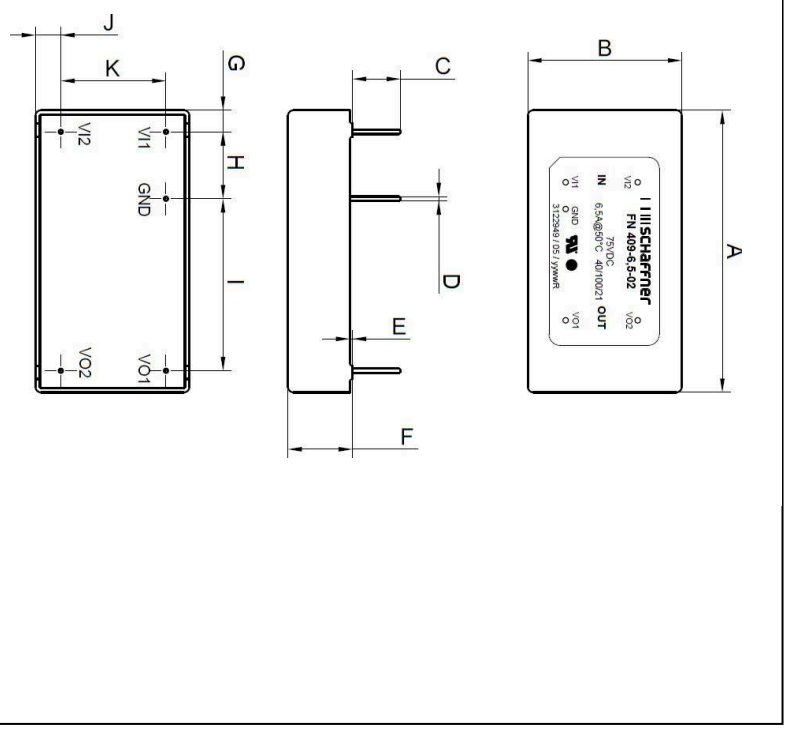

13 A types

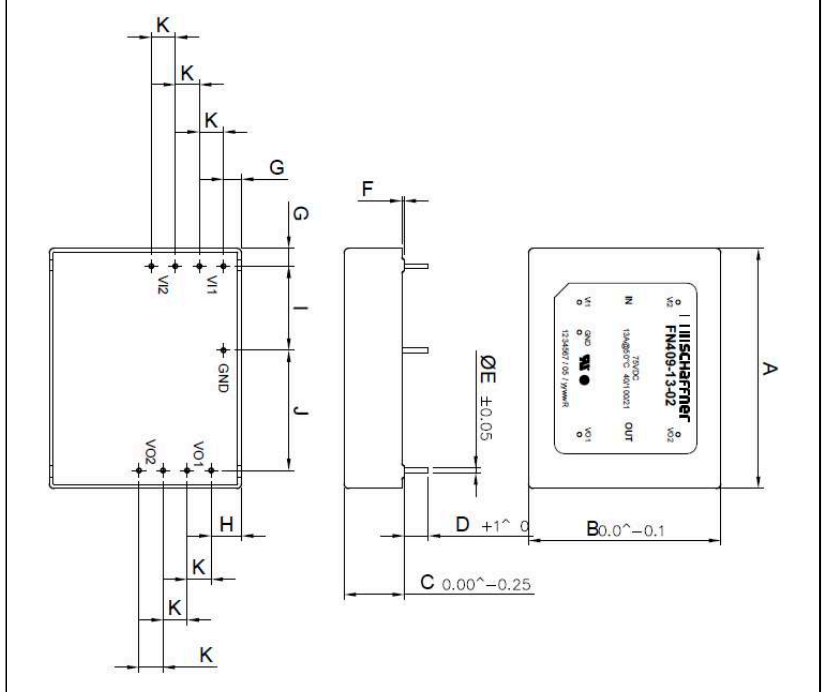

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m / EN 22768-m

Dimensions

	3 A	6.5 A	13 A
A	51	51	50.8
B	27.9	27.9	40.6
C	8.2	8.2	12.7
D	Ø0.8	Ø0.8	5.1
E	0.5	0.5	Ø1
F	11.7	11.7	0.5
G	3.9	3.9	3.8
H	12.1	12.1	6.4
I	31.1	31.1	17.8
J	4.6	4.6	25.4
K	19.05	19.05	5.08

Application

The filters are intended to be used in DC applications per EN/IEC 60950, where no transient on the DC bus occurs. To protect the filter against transient voltages a varistor (VDR, fig. 1) or a transient diode (fig. 2) must be placed at the input side of the filter module.

For protection against overcurrent place a fuse on each input lead (VI+, VI-). When AC voltage is superimposed on DC voltage, VP-P or VO-P, whichever is larger, should be maintained within the rated voltage range.

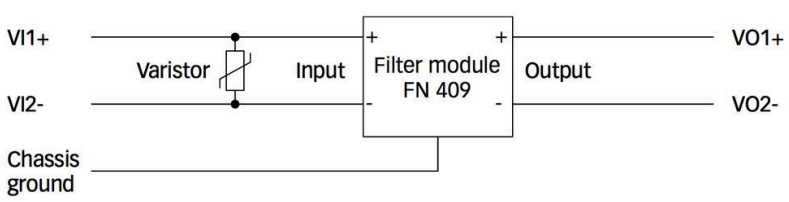


Figure 1: transient protection with a varistor


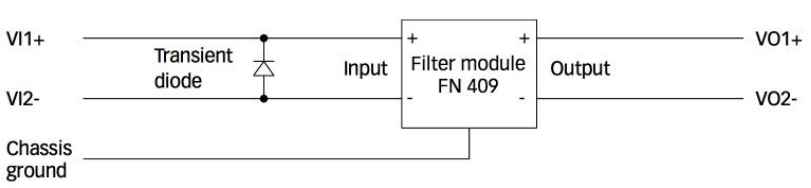


Figure 2: transient protection with a transient diode

Recommended Layout

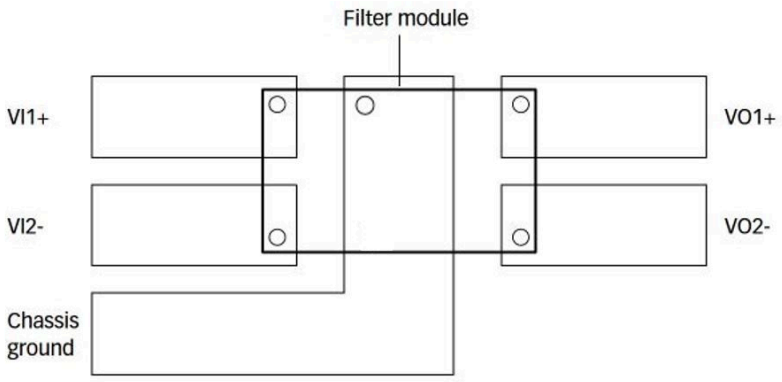

Note: avoid routing signal tracks or planes under the filter module

Please visit to find more details on filter connectors.

We are here to help



Read more insights from TE's experts:

Schaffner is now part of TE Connectivity

Learn more about Corcom products

Connect With Us

We make it easier to connect with our experts and are ready to provide the support you need.
Visit **te.com/support** to chat with a Product Information Specialist.

Contact a TE expert today

te.com

©2025 TE Connectivity plc. All Rights Reserved.

TE Connectivity, TE, TE connectivity (logo), and EVERY CONNECTION COUNTS, ECOsine, Schaffner are trademarks owned or licensed by TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

ED 01/25

schaffner MORE POWER TO YOU is now part of TE connectivity