


PART NUMBER	C THREAD CLASS 2B	E DIA ±.005	K DIA MAX	R +.000 -.010	T THREAD CLASS 2A	RELEASE	MADE FROM
10-123011-6	.3125-32 UNEF	.190	.469	.215	.3750-32 UNEF	31508-287	10-123011-6B
-8	.4375-28 UNEF	.312	.594		.5000-28 UNEF		-8B
-10	.5625-24 UNEF	.436	.719		.6250-24 UNEF		-10B
-12	.6875-24 UNEF	.561	.844		.7500-20 UNEF		-12B
-14	.8125-20 UNEF	.678	.969		.8750-20 UNEF		-14B
-16	.9375-20 UNEF	.802	1.094		1.0000-20 UNEF		-16B
-18	1.0625-18 UNEF	.894	1.219		1.1875-18 UNEF		-18B
-20	1.1875-18 UNEF	1.029	1.312	.312	1.1875-18 UNEF		-20B
-22	1.3125-18 UNEF	1.150	1.469		1.4375-18 UNEF		-22B
-24	1.4375-18 UNEF	1.274	1.594		1.4375-18 UNEF	33524-599	-24B

REL NO. 31508-287		REVISIONS			
CHG NO.	SYM	DESCRIPTION	DATE	APPROVED	
43525-746	A1	REDRAWN, WAS SIZE "B" TYPE WRITTEN; PROVIDED ENVELOPE DWG	11-21-64	W. GAY	
47524-170	A2	ADD & REL -XX9 FINISH	11-1-65	J. Harrison	
55524-58	A3	ADD & REL -XXG FINISH	11-1-67	DEMATTIO	
72028-54	B	(CL II) ADD & REL -XX7 FINISH	5/12/81	N. H. H.	
76484-1	C	(CL II) ADDED MADE FROM COLUMN	11-2-81	J. Harrison	
80-44-1	D	(CL II) ADDED 9-3 SPEC TO NOTE 1	9-1-88	J. Harrison	
82906	E	(CL II) ADD & REL -XXY FINISH	3-5-97	J. Harrison	
85035	F	ADD AND REL -XXY FINISH & DATA	10-1-83	J. Harrison	
85448	G	(CL II) SEE ECU: 85448	4-27-99	J. Harrison	
86546	H	(CL II) ADD & RELEASE -XXU FINISH & DATA	4-28-99	J. Harrison	

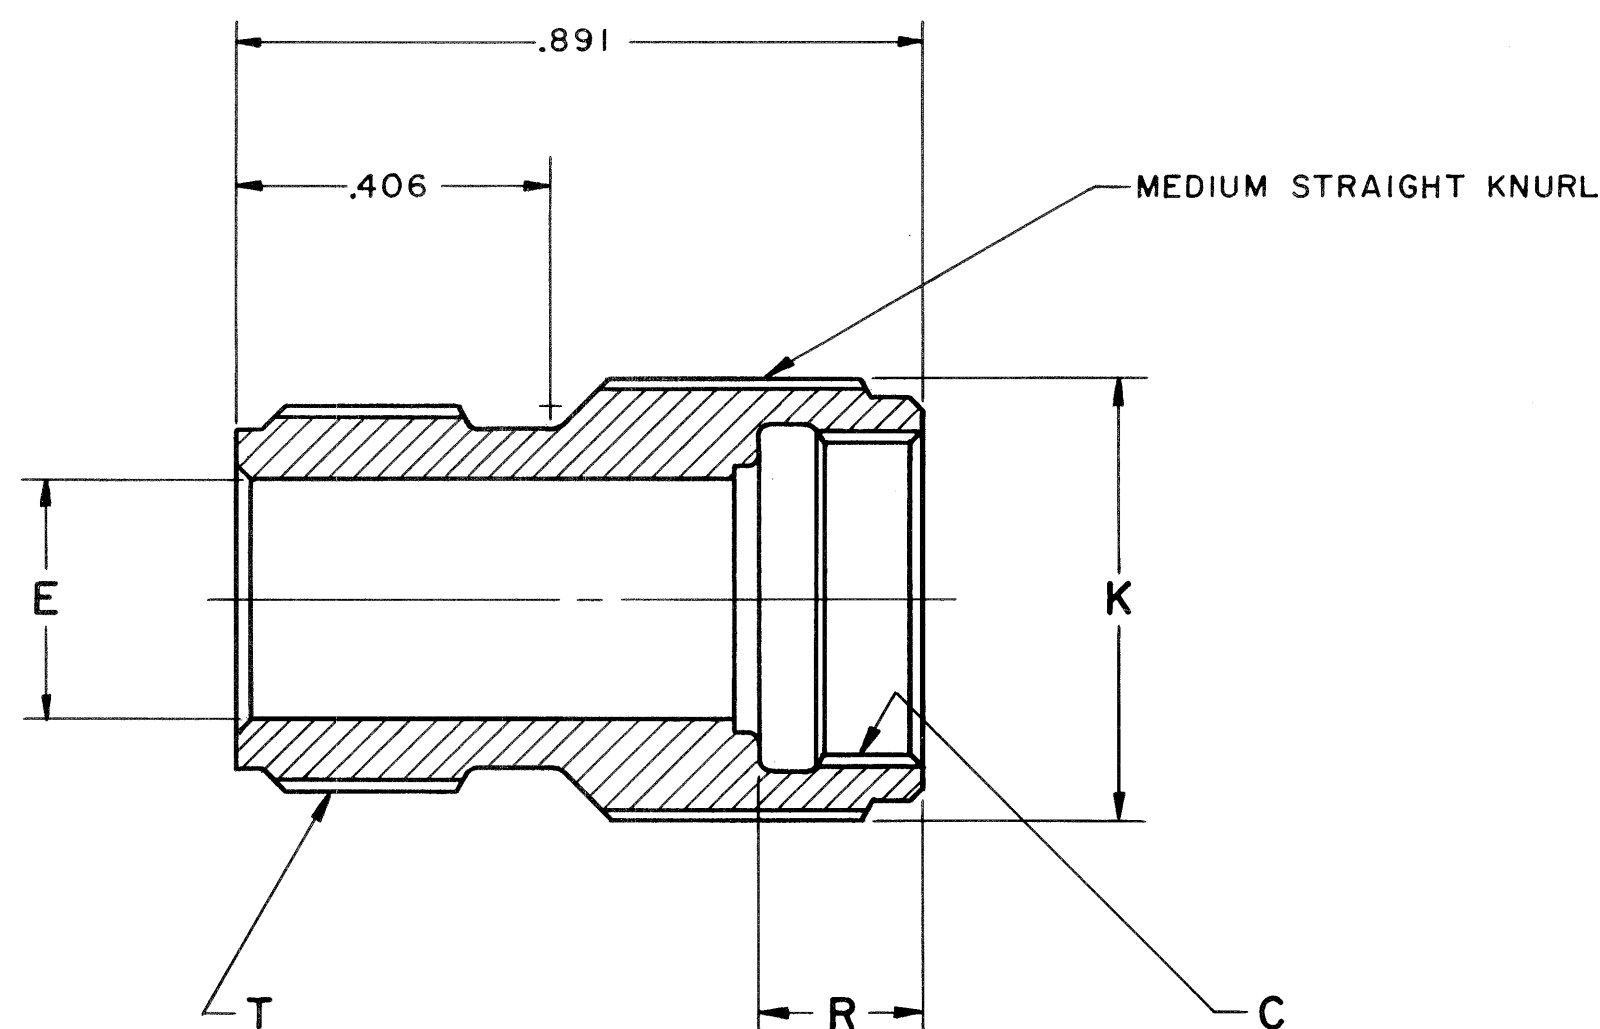

3. REF SYMBOL

2. THREADS ARE IN ACCORDANCE WITH FEDERAL HANDBOOK H-28.

1. TO COMPLETE PART NO., ADD APPLICABLE LAST DIGIT TO SUFFIX FOR DESIRED FINISH.

CHROMATE TREAT	SUFFIX - XX0
CADMIUM PLATE	SUFFIX - XX1
BLACK ANODIZE	SUFFIX - XX2
CADMIUM PLATE OLIVE DRAB	SUFFIX - XX3
GREY ANODIZE	SUFFIX - XX4
ANODIC COATING	SUFFIX - XX5
BRIGHT CADMIUM PLATE, NICKEL BASE	SUFFIX - XX7
NICKEL ALLOY PLATE	SUFFIX - XXG
CAD PLATE, O.D., NICKEL BASE	SUFFIX - XX9
BRIGHT NICKEL	SUFFIX - XX8
BLACK ZINC ALLOY PLATE	SUFFIX - XXY
BLACK ZINC CONDUCTIVE	SUFFIX - XXX

RELEASE NO.

38524-872	9-3350	GREEN ZINC
35524-218	9-2158	ALLOY PLATE
35524-218	9-3487	SUFFIX -XXU 9-9263
32525-260	9-3047	
31508-287	9-3487	
35508-72	9-3290	
55524-58	9-4332	
47524-170	9-6914	
42524-249	9-4960	
	9-3435	
	9-9181	
	9-9181-1	

USE OF THIS DOCUMENT IS UNLIMITED. DOCUMENTS REFERENCED HEREON CONTAIN LIMITED RIGHTS DATA.

ITEM NO.	QTY REQD	DESCRIPTION	PART NUMBER	CODE IDENT	ZONE
PARTS LIST					
UNLESS OTHERWISE SPECIFIED					
LINEAR DIMENSIONS ARE IN INCHES. TOLERANCES: 3 PLACES ±.010; 2 PLACES ±.03; 1 PLACE ±.1; ANGLES ±2°. OTHER STANDARDS PER SCINTILLA SPEC 9-3800 AND MIL-STD 8.					
MATERIAL SPEC		PROCESS SPEC			
ALUMINUM ALLOY					
DRAWN: HAYES		DATE: 7-12-56			
CHECKED: Teelon		DATE: 4-7-65			
MATERIAL:					
STANDARDS: J. Balantieri 4-7-65					
DRAFTING: D. Sweet 4-7-65					
ENGINEERING: W. Harrison 4-7-65					
DEVELOPMENT:					
THE Bendix CORPORATION SCINTILLA DIVISION SIDNEY, NEW YORK, U.S.A.					
TITLE: ADAPTER, ELECTRICAL CONNECTOR, TYPE PB(), (ENVELOPE DRAWING)					
CODE IDENT NO.		SIZE		10-123011	
77820		C			
SCALE NONE		WT		REF	
				SHEET	