

FO-52847-F

REV	DOCUMENT	CHANGED BY	CHECK
A	0000180	GLH 30APR03	SAV

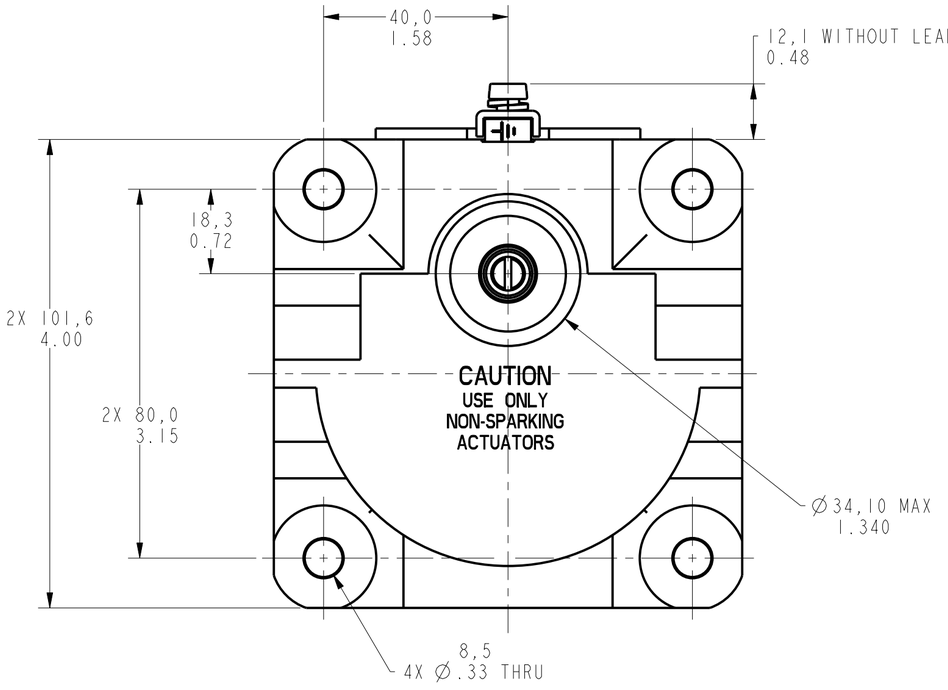

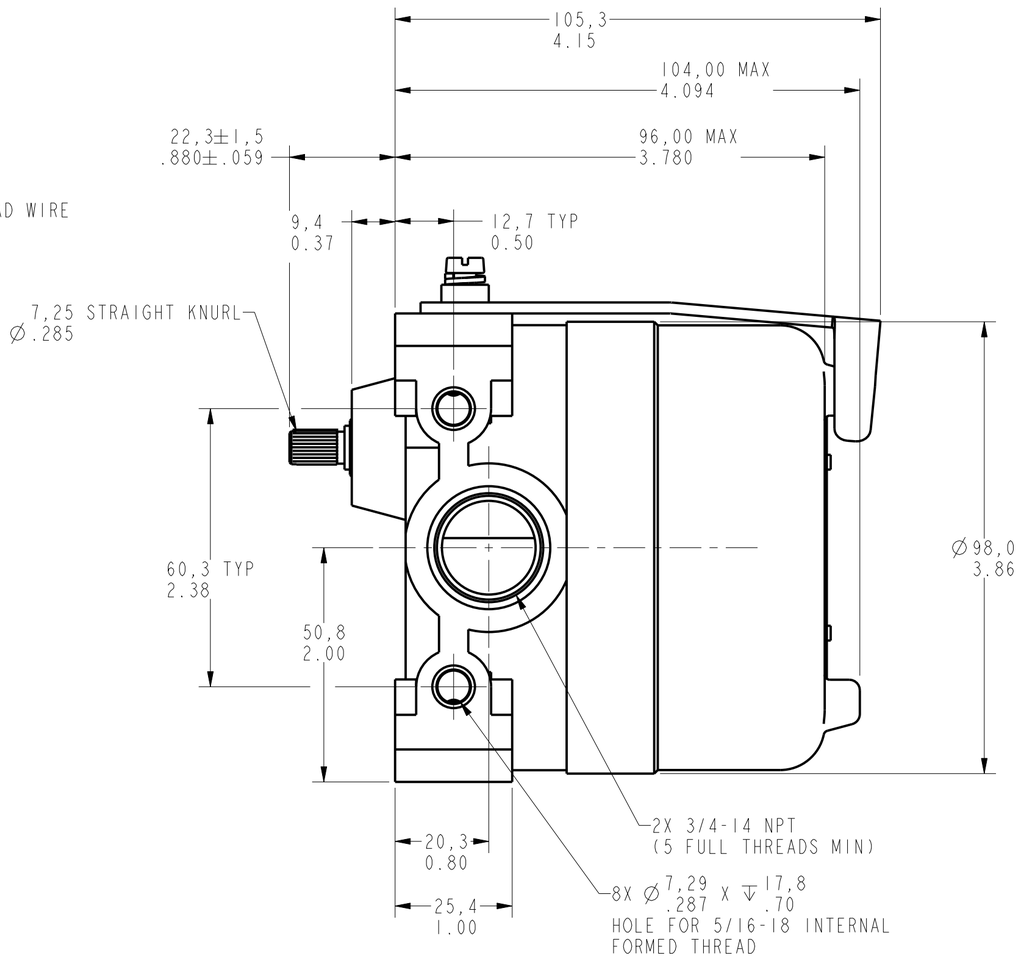

NOTES
1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS C AND D; CLASS 2 GROUPS E, F AND G
2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
4 - 6-32 UNC X (7,92 / .312) PAN HEAD TERMINAL SCREW AND LOCKWASHER (SEMS TERMI-LOX) (3 PER BASIC)
5 - CAMS MAY BE REPOSITIONED IN 7°20′ INCREMENTS
6 - 2 BASICS; EACH OPERATES CLOCKWISE AND COUNTER CLOCKWISE
7 - FOR USE IN TEMPERATURES UP TO 85°C
8 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
△9 WEIGHT: 2.49 LB (1,13 Kg) APPROX

CHARACTERISTICS	
OPERATING TORQUE	.92 LB FT (1,25 Nm) MAX
RELEASE TORQUE	.08 LB FT (0,10 Nm) MAX
PRETRAVEL	15° MAX
DIFFERENTIAL TRAVEL	10° MAX
OVERTRAVEL	90° MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (EACH BASIC)

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: X US(inch) CUSTOMARY ☐ SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	GLH	30APR03
CHECK	SAV	30APR03

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

3D PTC | ASME Y14.5M-1994

Honeywell

TITLE: SWITCH, ENCLOSED

SIZE	DWG TYPE	DRAWING NAME	REV
C	1	11CX2E	A

SCALE FULL | WEIGHT △9 | SHEET 1 OF 1