NS 32 AL UNPERF 2000MM - DIN rail, unperforated

1201028

https://www.phoenixcontact.com/nl/products/1201028

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.




DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, G profile, color: silver-colored

Commercial data

Item number	1201028
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BE7255
Product key	BE7255
GTIN	4017918017156
Weight per piece (including packing)	570 g
Weight per piece (excluding packing)	570 g
Customs tariff number	76042990
Country of origin	AT

Technical data

Dimensions

Dimensional drawing	
Width	32 mm
Depth	15 mm
Length	2000 mm

Material specifications

Color	silver-colored
Material	Aluminum
Coating	uncoated

Standards and regulations

Connection in acc. with standard	IEC / EN
Tests	similar to EN 60715


Electrical tests

Short-time withstand current

Equivalent E-Cu cross-section	70 mm²
Short-time current resistance 1s	8.4 kA
Max. permissible thermal nominal current for PEN function	192 A

Drawings

Dimensional drawing

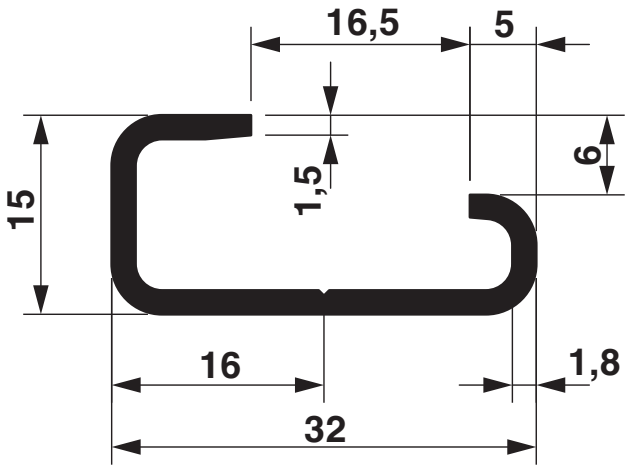

Classifications

ECLASS

ECLASS-13.0	27400602
ECLASS-15.0	27400602

ETIM

ETIM 10.0	EC001285

UNSPSC

UNSPSC 21.0	39121700

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT B.V.
Hengelder 56 6902 PA Zevenaar
Postbus 246 6900 AE Zevenaar
(0316) 59 17 20
sales@phoenixcontact.nl