

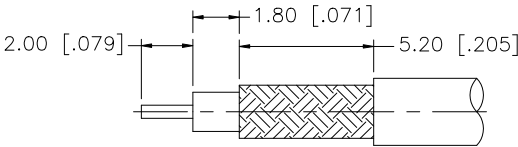
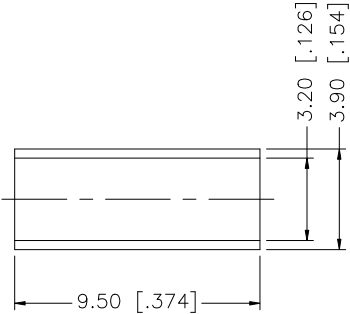


REV.	DATE	ECR NO.	DESCRIPTION
A	01/22/04	—	UPDATE DRAWING FORMAT
B	04/23/08	100009	MODIFY BARREL O.D., FERRULE O.D. AND I.D.



RECOMMENDED
CABLE STRIPPING DIM'S

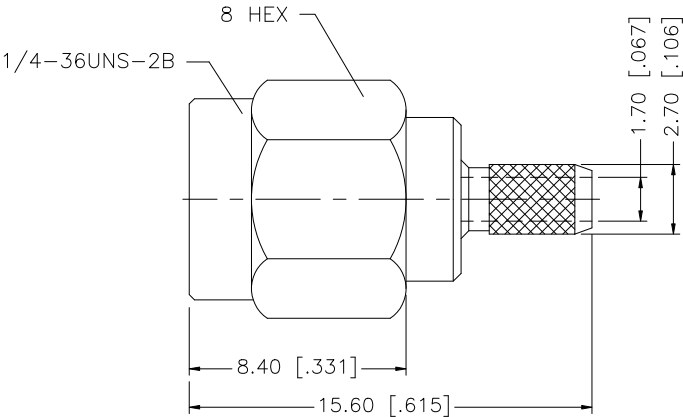

- NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex									
7						DRAWN	GRS	04/23/08											
6						CHECKED													
5	HEAT SHRINK TUBING			1			ISSUED				PART DESCRIPTION								
4	FERRULE	COPPER	GOLD	1			SHEET	1 OF 1				SMA REVERSE POLARITY CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)							
3	CONTACT PIN	BER. COPPER	GOLD	1		PART NO.													
2	INSULATOR	PTFE	NATURAL	1		132114RP													
1	BODY	BRASS	GOLD	1		CAD FILE		C:/132/132114RP.DWG		DWG. NO.		132114RP.DWG		REV.	B	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING													