



Automotive Parts > Automotive Connectors > Automotive Headers > Signal Header



PCB Mount Orientation: **Vertical**
Termination Method to PCB: **Through Hole - Solder**
Sealable: **No**
Centerline (Pitch): **2 mm [.079 in]**
Connector System: **Wire-to-Board**

[All Signal Header \(237\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	4
Number of Sections	1
PCB Mount Orientation	Vertical
Number of Positions	4
Number of Rows	1



Electrical Characteristics

Operating Voltage	12 VDC
Voltage Rating (Max)	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Mating Tab Width	.64 mm[.025 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Type	Tab
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Interface
PCB Mount Retention	Without
Mounting Holes	Without
Mating Alignment	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2 mm[.079 in]
--------------------	---------------

Dimensions

Connector Width	11.8 mm[.465 in]
Connector Length	10.25 mm[.404 in]
Profile Height from PCB	24.4 mm[.961 in]

Usage Conditions

Operating Temperature (Max)	100 °C[212 °F]
Operating Temperature Range	-30 – 100 °C[-22 – 212 °F]

Operation/Application

||
||
||



Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	40
Packaging Method	Tube

Other

Interface Number	1318620-2
------------------	-----------

Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

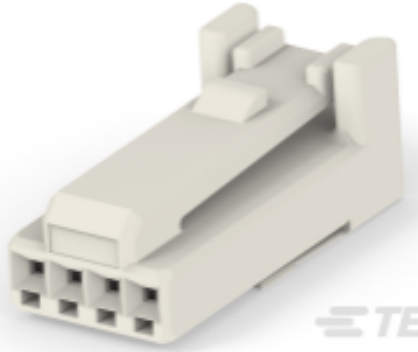

TE Part # 1318620-3
025 ANCHOR HEIGHT SENSOR 4POS
PLUG HSG



TE Part # CAT-T319-T273
TH/.025 CONNECTOR SYSTEM,
RECT AND TAB

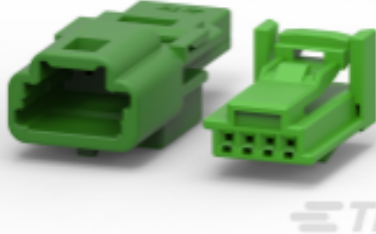

TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING



TE Part # 1612446-1
025 4POS CAP ASSY V-TYPE



TE Part # 1376516-1
025 4P V CAP HSG



TE Part # 1318620-4
025 ANCHOR HEIGHT SENSOR 4POS
PLUG HSG

Also in the Series | 0.64/025 Connector System



Automotive Connector Caps & Covers
(6)




Automotive Connector Locks &
Position Assurance(1)



Automotive Housings(174)



Automotive Signal & Power Headers
(152)

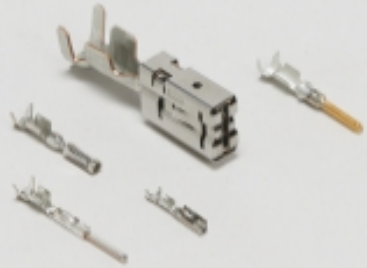

Automotive Terminals(20)



Other Automotive Connector
Accessories(4)

Customers Also Bought



TE Part #CAT-SIGH262
Signal Header



TE Part #CAT-PFSMTH9264
Press-Fit & SMT Header



TE Part #1-2330747-1
4POS,TAB0.63X0.63,HDR ASSY,
90DEG,SMD,S



TE Part #2362662-2
8POS,0.50,HDR ASSY,90DEG,KEY-A,
KEY-D



Documents

Product Drawings

025 4P V CAP HSG ASSY

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1376515-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1376515-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1376515-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of 025 Receptacle Contact

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

Japanese