RAFIX 22 FSR - Lens, translucent yellow

1.74.509.011/2400




General information	
Color of lens	translucent yellow
Form of collar	round

Dimensions	
Mounting hole	22.3 mm
Key grid	35 x 35 mm

Mechanical design	
Mounting	ring nut
Illuminability	yes

Other specifications	
Degree of protection from front side	IP65 (DIN EN 60529); IP69K (ISO 20653)
Ambient temp. operating min.	-40 °C
Ambient temp. operating max.	+85 °C
Storage temperature min.	-40 °C
Storage temperature max.	+85 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
Salt spray	IEC 600 68-2-11
ROHS compliant	yes
REACH compliant	yes

Panel cut-out to IEC 60947-5-1

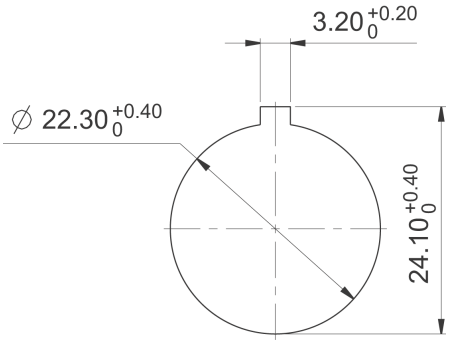

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.