ENTRELEC TERMINAL BLOCKS
DBL POWER DISTRIBUTION BLOCKS - DBL80


Screw Clamp Technology

1000 VAC / 1500 VDC (IEC) - 1000 V (UL), 80 A

INTRODUCTION

TE Connectivity (TE)'s compact and modular **power distribution blocks** distribute electrical circuits from a single input source to several devices in the branch circuit. Power distribution blocks are easy to install, save space, and allow increased productivity as well as flexibility of use. They are used in applications such as industrial and commercial panels HVAC, machinery, power distribution units (PDU), and commercial panels.





FEATURES

Easy to install

- 3 configurations in 1 product:
  - Single pole splitter: split of power main input into several outputs.
  - Multiple poles splitter: interlocking function and ready to use marking kit (L1, L2, L3, N, PE, +, -) delivered with each block.
  - Grouping of several inputs into 1 output (solar application).
- Flexible cover facilitates
  - Reversible, two directions opening, snap-on
  - All wiring data's and specifications visible on top.

Space saving

- Panel space saving: Save up to 50% rail space compare to conventional copper bars bars thanks to our modular compact design.
- 1500VDC:Voltage rating adapted to most recent solar inverters requirements

Increased productivity

- Reduced wiring, inventories, hardware and assembly costs:
  - Reduce assembly time by 80 % compared to conventional systems.
  - Our modular and touch proof concept reduces the needs for bus bars, isolators, fasteners, protection screens.
  - Accept aluminum & copper conductors.
  - 1 product in stock for 3 possible configurations.


APPROVALS

ENTRELEC DBL POWER DISTRIBUTION BLOCKS


Screw clamp technology

DISTRIBUTING POWER IN INDUSTRIAL AND COMMERCIAL PANELS HVAC, MACHINERY, POWER DISTRIBUTION UNIT (PDU), COMMERCIAL PANELS

3 Phases

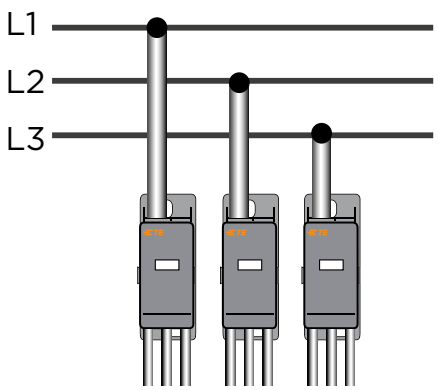

3 Phases with jumpering wire

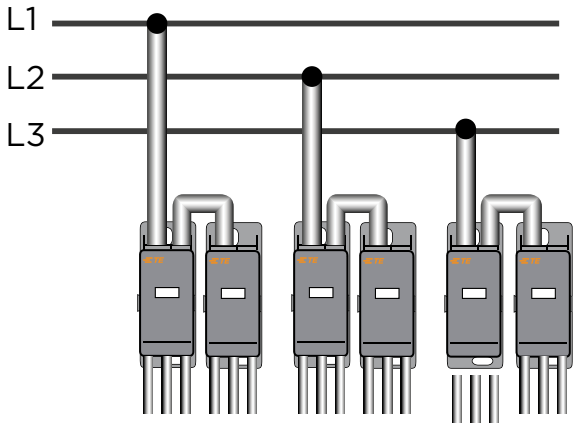

MAIN TECHNICAL DATA

Description		IEC	UL
Max current / Cross section	Copper	80 A / 16 mm²	80 A / 4 AWG
	Aluminium	63 A / 16 mm²	-
Rated voltage		1000 V AC / 1500 V DC	1000 V
Rated impulse voltage		8 kV	-
Short-time withstand current (Icw 1s)		1920 A	-
Dielectric withstanding voltage (Max)		2200V	-
Short Circuit Current Rating (SCCR)		-	100kA/600 VAC
Rated peak withstand current (Ipk)		27 kA	-
Protection		IP20	NEMA 1

Wire Range kcmil/AWG Line, Load	OverCurrent Protection Fuse Required Class/Max Amp Rating						Torque (Nm)	Short Circuit Current Rating (SCCR), RMS Sym A, (Single phase only)	Volts Max AC
	RK1	RK5	J	T	G	CC			
Input : 14-4 AWG (1.5- 2 Nm)	100A	30A	110A	175A	60A	30A	1.5-2	100kA	600
Output 1: 2x (14-4 AWG) (1.5- 2 Nm)							1.5-2		
Output 2: 4x (14-10 AWG) (0.8- 1.2 Nm)							0.8-1.2		


UL Flammability rating : UL 94V-0

Operating temperature range : -55°C - 110°C (-67 - 230 °F)

Installation temperature range: -5 – 40 °C (23 – 104 °F)

The connecting capacity data for one Rigid: Solid/Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on http://www.te.com


DIMENSIONS: mm(in)

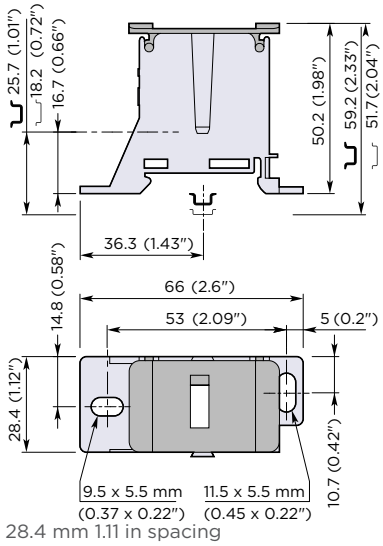

ORDERING DETAILS

Description	Color	Type	Part Number	Pkg qty	Weight 1 Piece (g)
Feed-through Single pole distribution, 7 connections	Grey	DBL80	1SNL308010R0000	1	70

MOUNTING AND WIRING INSTRUCTIONS

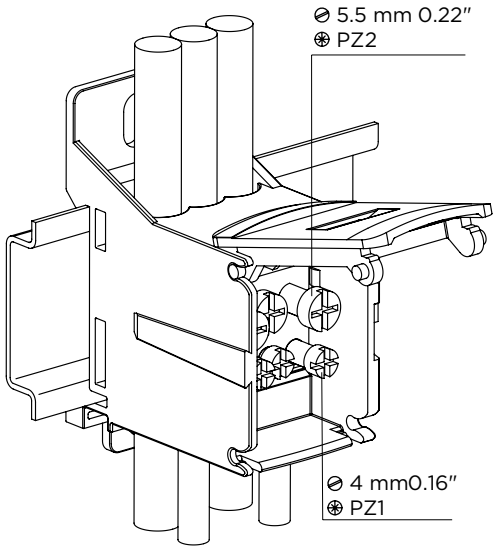

	TH 35-7.5	Rail
	TH 35-15	
	Not allowed Flexible without ferrule (IEC V-K & UL: class 5/6)	
	Flexible with insulated ferrule (IEC V-K & UL: class 5/6)	
	Rigid Solid (IEC V-U class 1, UL solid)	
	Rigid Stranded (IEC V-R class 2, UL class B/C)	
	Allen key	
	Posidriv - flat screwdriver	

Connection Number	Size	Wire Type		Wire stripping length	Tool		Torque
Input X3	Ø 6.6 mm	2.5 ... 16 mm²	2.5 ... 16 mm²	15 mm		5.5 mm	1.5 ... 2 Nm
	Ø 0.26 in	14 ... 6 AWG	14 ... 4 AWG	0.59 in		0.22 in	13.5 ... 18 lb.in
Output X4	Ø 4.5 mm	2.5 ... 6 mm²	2.5 ... 6 mm²	11 mm		4 mm	0.8 ... 1.2 Nm
	Ø 0.18 in	14 ... 10 AWG	14 ... 10 AWG	0.43 in		0.16 in	7.2 ... 10.8 lb.in

ACCESSORIES ORDERING DETAILS



Description			Color	Type	Part Number	Pkg qty	Weight - 1 Piece (g)
End stops	10 mm	0.394 in	Grey	BAM4	1SNK900001R0000	50	14.00
	5.2 mm	0.205 in		BAZ1	1SNK900002R0000	50	5.30
	10 mm	0.394 in		BAZH1	1SNK900102R0000	20	24.00
Terminal block markers	Blank card		Green	MC512PA-GN	1SNK149997R0000	20	10.00
			Blue	MC512PA-BL	1SNK149998R0000	20	10.00
			White	MC512PA	1SNK149999R0000	20	10.00
	Pre-printed marker card (L1-L2-L3-N-PE)			MC512PA	1SNK149002R0000	1	10.00

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

te.com

©2024 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

03/24 ED