



Automotive Parts > Automotive Connectors > Automotive Housings



Nominal Voltage Architecture: 12 V

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: 3

Sealable: **Yes**

Operating Temperature Range: -40 – 150 °C [-40 – 302 °F]

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Board, Wire-to-Device
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Primary Product Color	Black
-----------------------	-------



Connector & Keying Code

III

Contact Features

Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Product Width	20.1 mm[.791 in]
Product Length	30 mm[1.181 in]
Connector Height	30.5 mm[1.201 in]

Usage Conditions

Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
Operating Temperature (Max)	150 °C[302 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Method	Bag
Packaging Quantity	150

Other

Serviceable	No
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2297696-2
2.8MM SLD 3P PLUG COVER HSG



TE Part # 936106-1
2.8MM SLD 3P PLUG RETAINER YEL



TE Part # 828904-1
SINGLE WIRE SEAL FOR J.P.T.CON



TE Part # 828905-1
SINGLE-WIRE-SEAL(5MM HOLE)



TE Part # CAT-AM706-T273
AMP MCP, SFC, RECEPTACLE



TE Part # 936112-1
2.8mm Sealed 3P Cover




TE Part # 936106-2
2.8MM SLD 3P PLUG RETAINER BLK



TE Part # 936106-3
2.8MM SLD 3P PLUG RETAINER GRY

Also in the Series | Sealed Sensor Connector SSC System

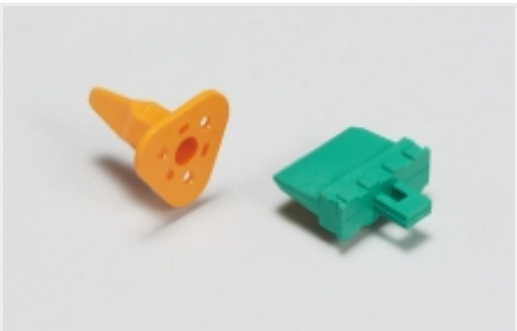

Automotive Connector Locks & Position Assurance(2)



Automotive Housings(34)



Automotive Seals & Cavity Plugs(3)



Automotive Signal & Power Connector Housings(33)

Customers Also Bought



TE Part #CAT-T4827-CH8172
Timer Connector Housing



TE Part #1-1897255-2
SLOT CLIP FOR J300 / 090 TYPE



TE Part #2109006-3
060 REC(M) CONT



TE Part #2109582-2
MT-II SLD 12P PLUG ASSY



TE Part #2317063-2
46POS,HYBRID,REC HSG ASSY,SLD, COD A



TE Part #2389766-1
66POS,HYBRID,REC HSG ASSY



TE Part #2219498-2
CAVITY PLUG FOR MCON1.2



TE Part #2373977-2
025 14P JOINT PLUG ASSY TYPE B

Document

Product Drawings
2.8MM SLD 3P PLUG ASSY

English

CAD Files
Customer View Model
ENG_CVM_CVM_2-936060-1_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model
ENG_CVM_CVM_2-936060-1_C.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_2-936060-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Product Specifications

Application Specification

English

2.8MM SENSOR FLAT TYPE RECEPTACLE CONTACT SYSTEM

English

Application Specification

English