

DTM06-08SA-E003

✓ ACTIVE

DEUTSCH | DEUTSCH DTM, DEUTSCH DT

TE Internal #: 2289630-1

12 V / 24 V / 48 V, 8 Position, Automotive Housing for Female
Terminals, Wire-to-Wire, 4.19 mm [.165 in] Centerline, Sealable,
Gray, Hybrid

[View on TE.com >](#)



Automotive Parts > Automotive Connectors > Automotive Housings > DEUTSCH DTM Housings



Nominal Voltage Architecture: 12 V, 24 V, 48 V

Connector & Housing Type: Housing for Female Terminals

Number of Positions: 8

Sealable: Yes

Operating Temperature Range: -55 – 125 °C [-67 – 257 °F]

[All DEUTSCH DTM Housings \(103\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Number of Positions	8
Number of Rows	2

Electrical Characteristics

--	--



Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180 °
Primary Product Color	Gray
Connector & Keying Code	A

Contact Features

Contact Size	Size 20
Contact Type	Socket
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	4.19 mm[.165 in]

Dimensions

Row-to-Row Spacing	7.11 mm[.28 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Product Width	16.51 mm[.65 in]
Product Length	31.62 mm[1.245 in]
Connector Height	31.62 mm[1.245 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards



IP Rating	IP68, IP6K9K
Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94

Packaging Features

Packaging Quantity	900
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # WM-8S
WEDGE LOCK, 8P, PLG, ORG, DTM



TE Part # DTM04-08PA-C017
REC, 8P, GRY, BLOCKED, A



TE Part # CAT-D485-CH8172
DEUTSCH DTM Housings



TE Part # YDTM04-08PA-L02500
REC, 8P, GRY, N, FLANGE, A



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE




TE Part # CAT-D48-SFT273
DEUTSCH Connector Stamped and Formed Contacts - Reel



TE Part # DTM13-08PA-R004
HDR, 8P, GRY, RA, NI/CU, A

Also in the Series | **DEUTSCH DTM**

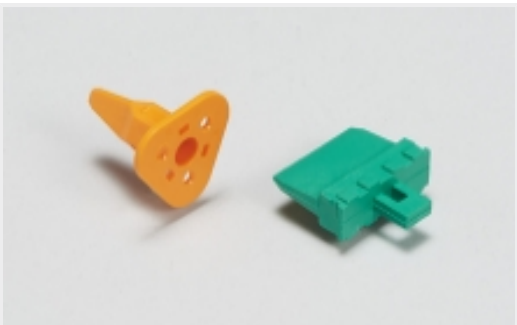

Automotive Connector Locks & Position Assurance(87)



Automotive Housings(765)




Connector Seals & Cavity Plugs(18)




Other Automotive Connector Accessories(27)

Also in the Series | **DEUTSCH DT**

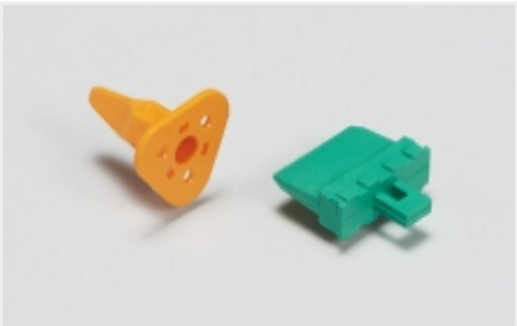

Automotive Connector Locks & Position Assurance(87)

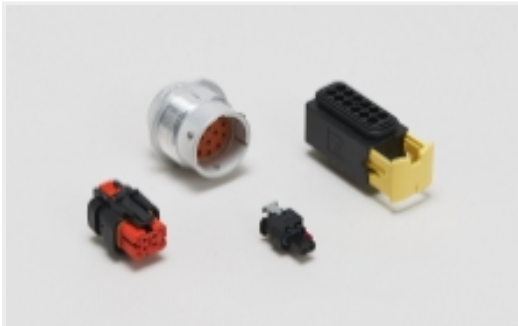


Automotive Housings(765)



Connector Seals & Cavity Plugs(18)



Infotainment & Multimedia Cable Assemblies(1)

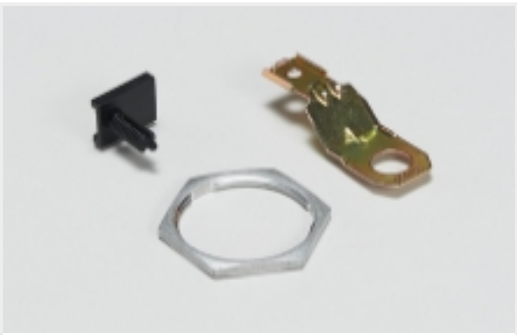

Other Automotive Connector Accessories(27)

Customers Also Bought



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT



TE Part #CAT-D48-ST273
DEUTSCH Connector Solid Contacts




TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #DT06-2S
PLG, 2P, GRY, N



TE Part #CAT-D487-W416
WedgeLocks: DEUTSCH DT

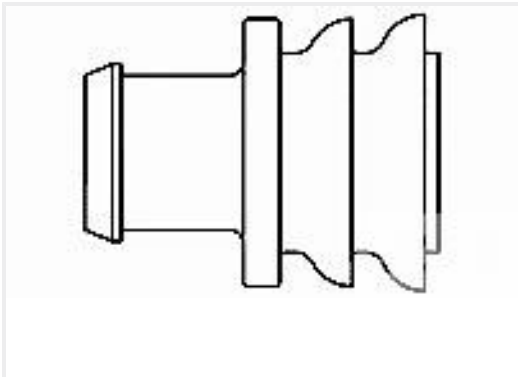

TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING

Documents

Product Drawings

DTM06-08SA-E003, PLG, 8P, GRY, N, CAP, A

English

CAD Files

Customer View Model

ENG_CVM_CVM_2289630-1_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2289630-1_A.3d_igs.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2289630-1_A.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Product Specifications

Application Specification

English

Agency Approvals

UL Report

English