2320934-4 ✔ ACTIVE


AMP | AMPSEAL 16

TE Internal #: 2320934-4


12 V, 4 Position, Automotive Housing for Female Terminals, Wire-to-Wire, 5.3 mm [.209 in] Centerline, Sealable, Gray, Wire & Cable, AMPSEAL 16

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings

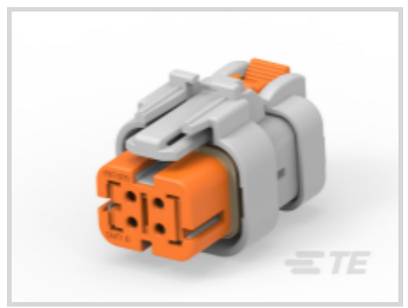



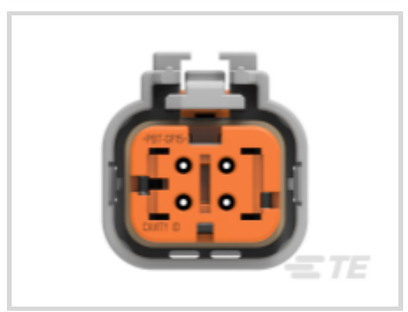

Nominal Voltage Architecture: **12 V**

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: **4**

Sealable: **Yes**

Operating Temperature Range: **-40 – 150 °C [-40 – 302 °F]**

All AMPSEAL 16 Housings (224)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Number of Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	D

Contact Features

Contact Size	1.6mm
Contact Type	Socket
Mating Pin Diameter	1.6 mm[.062 in]

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5.3 mm[.209 in]

Dimensions

Row-to-Row Spacing	4.5 mm[.177 in]
Product Width	25.33 mm[.997 in]
Product Length	36.7 mm[1.445 in]
Connector Height	26.8 mm[1.055 in]

Usage Conditions

Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
Operating Temperature (Max)	150 °C[302 °F]

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Tube

Other

Serviceable	Yes
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519360984) Decamethylcyclopentasiloxane (D5) (.5% in 27519360984) Octamethylcyclotetrasiloxane (D4) (.5% in 27519360984) **Article Safe Usage Statements:** Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-AM7801-CH8172
AMPSEAL 16 Housings



TE Part # CAT-AM7801-T618
Removal Tools — AMPSEAL 16



TE Part # CAT-AM7801-T273
AMPSEAL 16 CONTACTS




TE Part # 2272179-3
AMPSEAL 16 PERIPHERAL SEAL 4P - SERVICE



TE Part # 776363-1
SEALING PLUG, SZ 16 CAVITY

Also in the Series | AMPSEAL 16

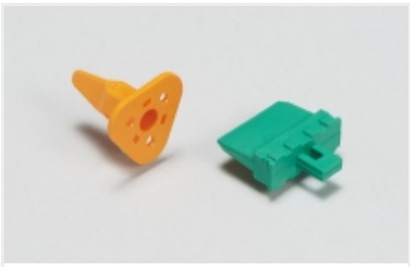


Automotive Connector Locks & Position Assurance(6)




Automotive Housings(241)




Automotive Seals & Cavity Plugs(11)

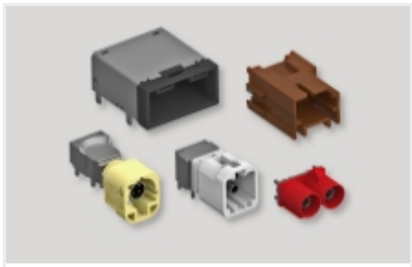

Data Connectivity Headers(10)

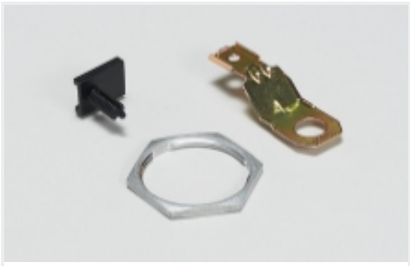

Other Automotive Connector Accessories(8)

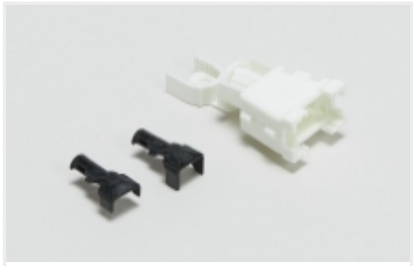

Rectangular Backshells & Clamps(74)

Customers Also Bought



TE Part #211401-7
RECEPT,SZ 13-7,CPC



TE Part #1-925017-5
250 FASTON HSG.,REC.,1 POS,BLACK




TE Part #CAT-AM7801-B128
AMPSEAL 16 Connectors Backshell



TE Part #2348771-1
HD MATEnet SWS



TE Part #9-2348792-1
HD MATEnet 1+12 TAB HSG ASSY, GRP E



TE Part #9-2354248-1
HD MATEnet 1+2 TAB ASSY, GRP C, FLANGED



TE Part #1-2405028-1
26POS,HYBRID,PIN HSG ASSY,SLD, COD A



TE Part #2428520-1
CVTY PLUG,PIN DIA 2.5,CVTY DIA,4.0, PUR



TE Part #1-925017-0
250 FASTON HSG.,REC.,1 POS, NATRUAL

Documents

Product Drawings

AS16,PLUG ASSY,HT,04P,E SEAL,CODE D

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2320934-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2320934-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2320934-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English