934442506 SUPERSEDED

DEUTSCH | DEUTSCH DT-XT

TE Internal #: 2600026-8

TE Internal Description: 3CCT WHITE RECEP W/SMALL SEAL & HS

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings







Nominal Voltage Architecture: **12 V**

Connector & Housing Type: **Receptacle**

Number of Positions: **3**

Sealable: **Yes**

Number of Rows: **1**

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Triangular
Connector & Housing Type	Receptacle
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Nominal Voltage Architecture	12 V

Body Features

Primary Product Color	White

Contact Features

Contact Size	Size 16
Mating Pin Diameter	1.56 mm[.061 in]

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Centerline (Pitch)	8.66 mm[.34 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]

Other

Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | DEUTSCH DT-XT

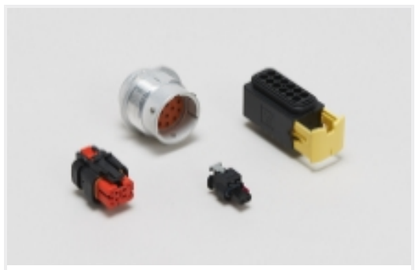

Automotive Housings(12)


Customers Also Bought



TE Part #YHV280-2PM-P-4MM-B
HVA280-2phm,pass,4sqmm,Key B



TE Part #2-330648-1
PIDG 22-16 22-18 MIL R 4; TAPE




TE Part #464291-5
ANVIL, SAND-BLASTED 12-10



TE Part #788189-2
CPC 17-3 RCPT ASY,REV SEX



TE Part #1587940-3
CABLE SEAL RETAINER, SIZE C

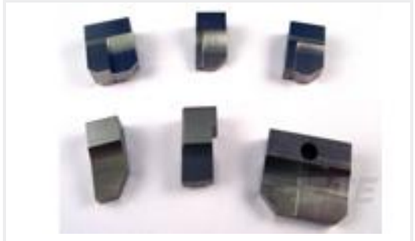

TE Part #4-1633932-0
ANVIL, COMBINATION



TE Part #1-1633961-2
CRIMPER, INSULATION F PREMIUM



TE Part #2103013-3
CABLE SEAL RETAINER, SIZE 2, OR, HVA280



TE Part #2177090-3
STEEL,OUTER FERRULE,8MM HV, 25SQMM



TE Part #2208669-3
8MM HV, CONTACT,ASSY

Documents

Product Drawings

3CCT WHITE RECEP W/SMALL SEAL & HS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2600026-8_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2600026-8_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2600026-8_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English