




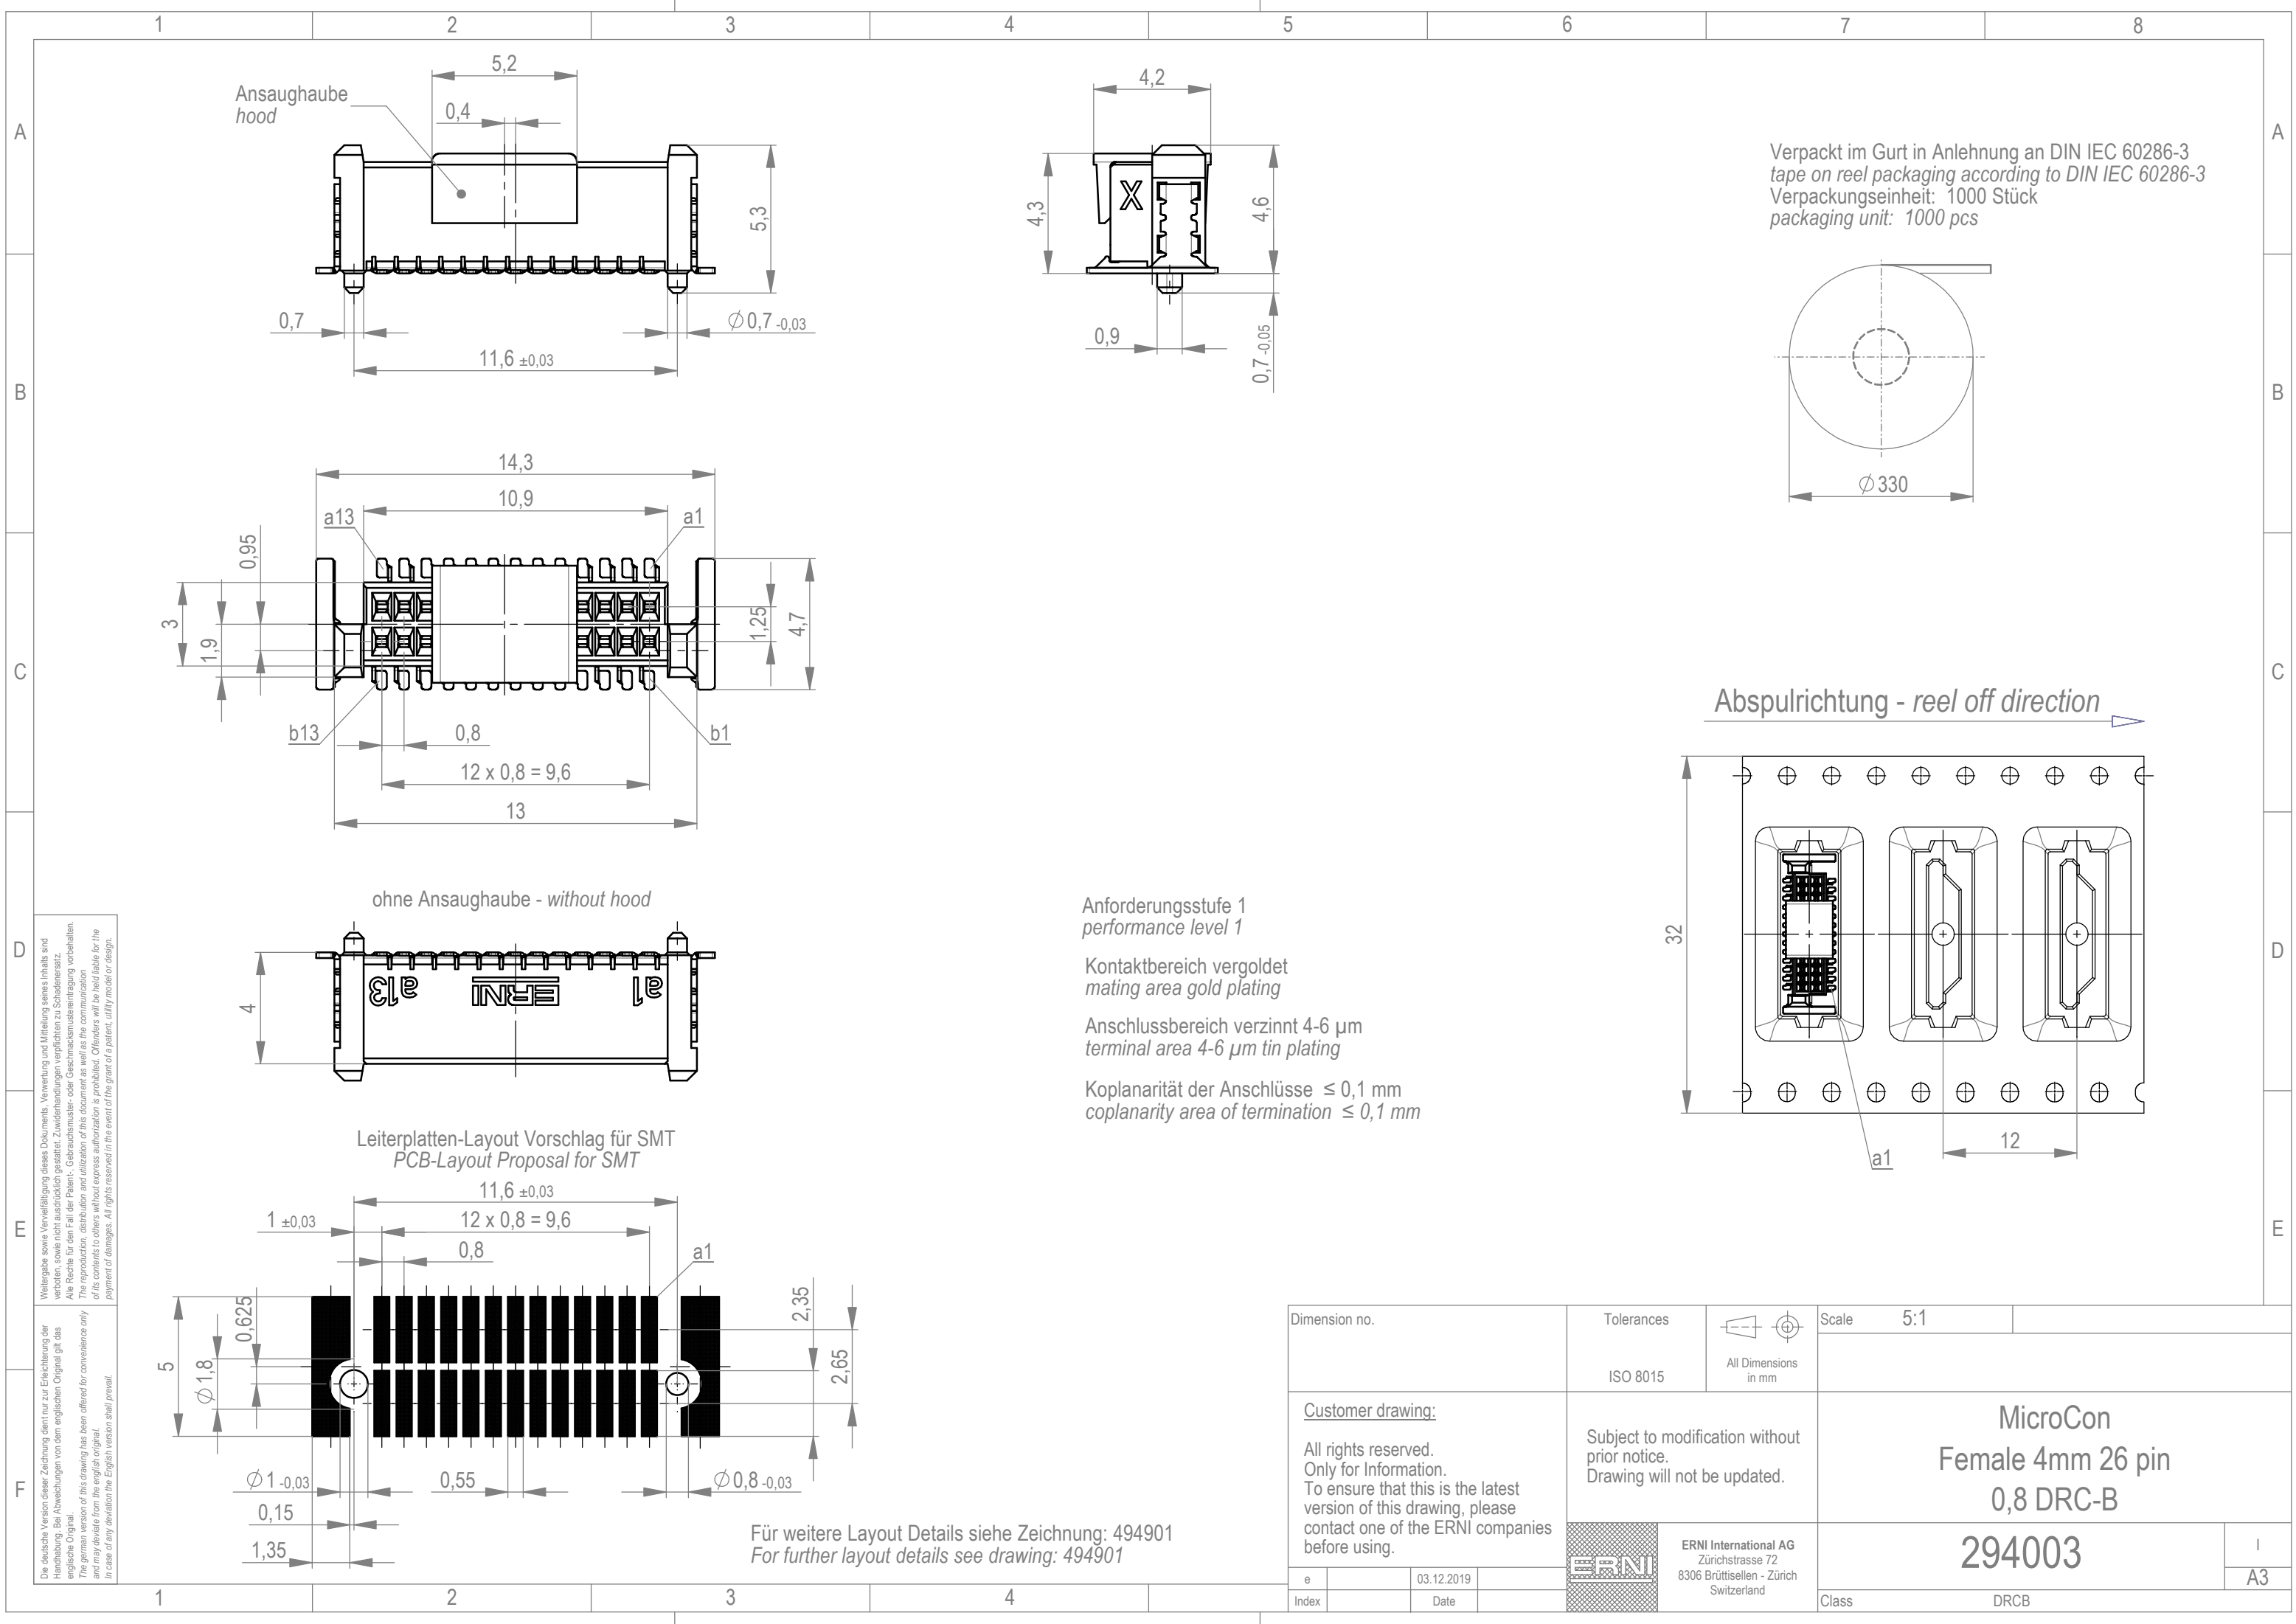

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 1000 Stück
packaging unit: 1000 pcs



Abspulrichtung - reel off direction

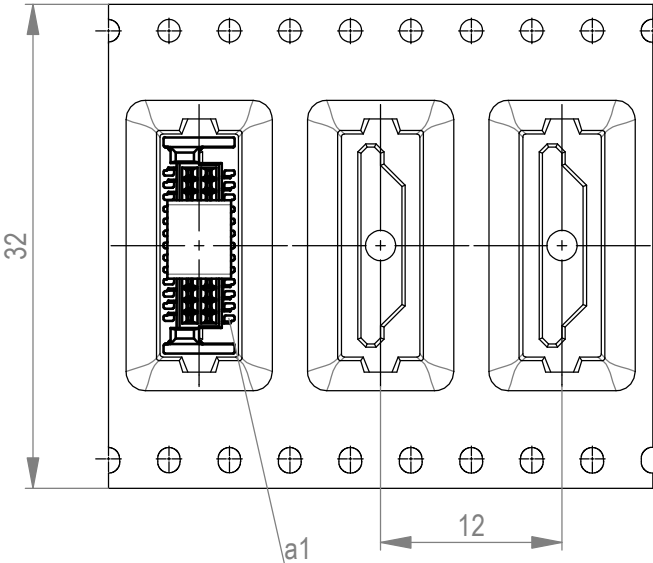


Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

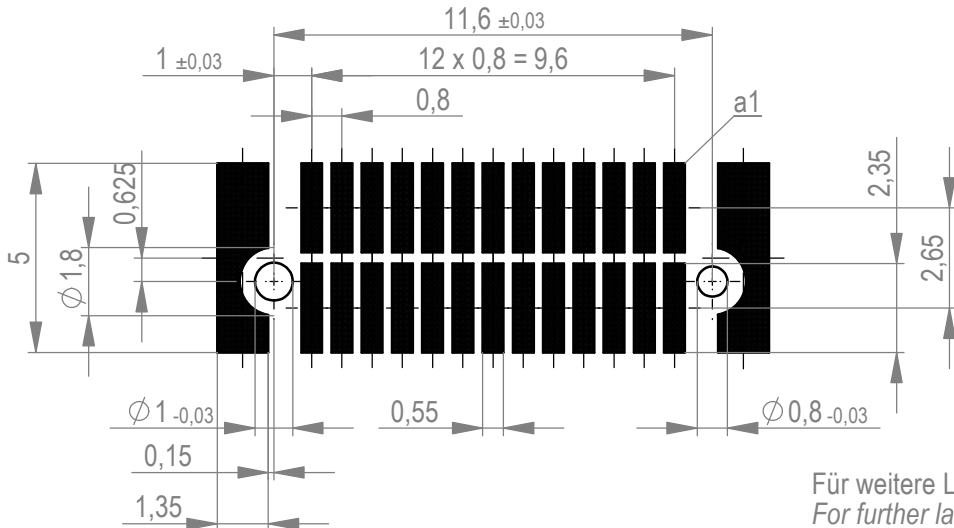

Für weitere Layout Details siehe Zeichnung: 494901
For further layout details see drawing: 494901

Dimension no.				Tolerances				Scale		5:1	
				ISO 8015		All Dimensions in mm					
<u>Customer drawing:</u> All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		MicroCon Female 4mm 26 pin 0,8 DRC-B					
						ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland					
e		03.12.2019				294003 I A3					
Index		Date									
						ClassDRCB					