
PT 1,5/S-QUATTRO-PE - Protective conductor terminal block

3208333

https://www.phoenixcontact.com/pc/products/3208333

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor terminal block, number of connections: 4, connection method: Push-in connection, 1 level, cross section: 0.14 mm^2 - 1.5 mm^2, mounting type: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- The compact design and front connection enable wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- Tested for railway applications

Commercial data

Item number	3208333
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE2223
GTIN	4046356564304
Weight per piece (including packing)	7.205 g
Weight per piece (excluding packing)	7.205 g
Customs tariff number	85369010
Country of origin	DE

Technical data

Product properties

Product type	Ground terminal block
Product family	PT
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	4
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	4
Nominal cross section	1.5 mm²

1 level

Connection method	Push-in connection
Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A1 / B1
Connection in acc. with standard	IEC 60947-7-2
Conductor cross-section rigid	0.14 mm² ... 1.5 mm²
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible	0.14 mm² ... 1.5 mm²
Conductor cross-section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm² ... 1.5 mm²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.14 mm² ... 1 mm² Using the AI-S 1-8 TQ ferrule, Item No. 1200293, is recommended

1 level Connection cross sections directly pluggable

Conductor cross-section rigid	0.25 mm² ... 1.5 mm²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm² ... 1.5 mm²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.34 mm² ... 1 mm²

Ex data

Rated data (ATEX/IECEx)

Identification	Ⓔx II 2 GD Ex eb IIC Gb

Operating temperature range (1)	-60 °C ... 85 °C
Operating temperature range (2)	-40 °C ... 110 °C
Ex-certified accessories	3208375 D-PT 1,5/S-QUATTRO
	1204504 SZF 0-0,4X2,5
	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
output	(Permanent)

Ex connection data General

Nominal cross section	1.5 mm²
Rated cross section AWG	16
Connection capacity rigid	0.14 mm² ... 1.5 mm²
Connection capacity AWG	26 ... 16
Connection capacity flexible	0.14 mm² ... 1.5 mm²
Connection capacity AWG	26 ... 16

Dimensions

Width	3.5 mm
End cover width	2.2 mm
Height	63.2 mm
Depth	30.5 mm
Depth on NS 35/7,5	32 mm
Depth on NS 35/15	39.5 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Long life test category 2, bogie-mounted
Frequency	f_1 = 5 Hz to f_2 = 250 Hz
ASD level	6.12 (m/s²)²/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-2

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

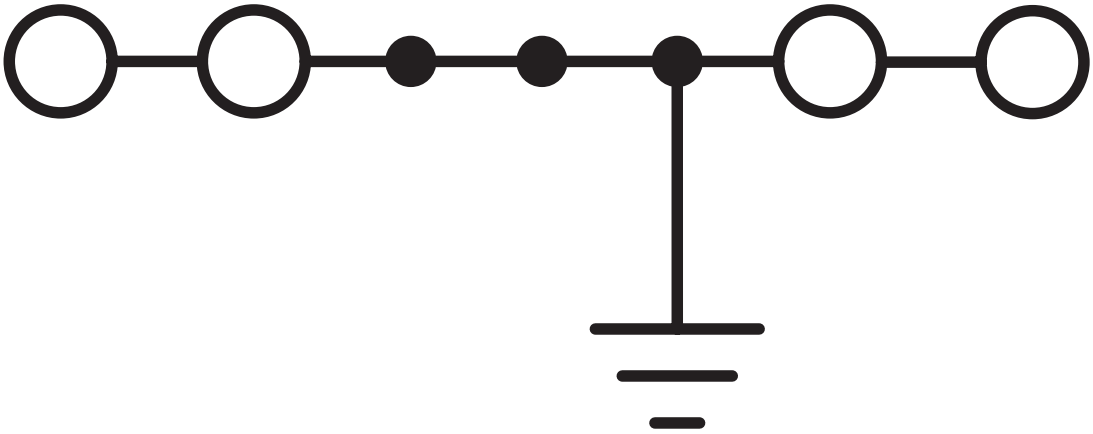

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/3208333

CSA
Approval ID: 2030668

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	-	-	26 - 14	-

cULus Recognized
Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B				
	-	-	26 - 14	-
C				
	-	-	26 - 14	-
D				
	-	-	26 - 14	-

LR
Approval ID: LR2371832TA

NK
Approval ID: 14ME0912

VDE Zeichengenehmigung
Approval ID: 40039744

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	-	-	-	0.14 - 1.5

ABS
Approval ID: 21-2192245-PDA

DNV
Approval ID: TAE000010T

EAC Ex
Approval ID: RU C-DE.AB72.B.02351

IECEx
Approval ID: IECEx SEV13.0005U

ATEX
Approval ID: SEV13ATEX0159U

CCC
Approval ID: 2020322313000631

EAC Ex
Approval ID: KZ 7500525010101950

Classifications

ECLASS

ECLASS-13.0	27250103
ECLASS-15.0	27250103

ETIM

ETIM 9.0	EC000901

UNSPSC

UNSPSC 21.0	39121400

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EF3.0 Climate Change

CO2e kg	0.049 kg CO2e

Accessories

Note: Applying some accessories below might limit this product.

FBS 2-3,5 - Plug-in bridge

3213014

https://www.phoenixcontact.com/pc/products/3213014



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: red

FBS 3-3,5 - Plug-in bridge

3213027

https://www.phoenixcontact.com/pc/products/3213027



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: red

FBS 4-3,5 - Plug-in bridge

3213030

https://www.phoenixcontact.com/pc/products/3213030



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: red

FBS 5-3,5 - Plug-in bridge

3213043

https://www.phoenixcontact.com/pc/products/3213043



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: red

FBS 10-3,5 - Plug-in bridge

3213056

https://www.phoenixcontact.com/pc/products/3213056



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: red

FBS 20-3,5 - Plug-in bridge

3213069

https://www.phoenixcontact.com/pc/products/3213069



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: red

FBS 2-3,5 BU - Plug-in bridge

3213086

https://www.phoenixcontact.com/pc/products/3213086



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: blue

FBS 3-3,5 BU - Plug-in bridge

3213099

https://www.phoenixcontact.com/pc/products/3213099



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: blue

FBS 4-3,5 BU - Plug-in bridge

3213109

https://www.phoenixcontact.com/pc/products/3213109



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: blue

FBS 5-3,5 BU - Plug-in bridge

3213112

https://www.phoenixcontact.com/pc/products/3213112



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: blue

FBS 10-3,5 BU - Plug-in bridge

3213125

https://www.phoenixcontact.com/pc/products/3213125



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: blue

FBS 20-3,5 BU - Plug-in bridge

3213138

https://www.phoenixcontact.com/pc/products/3213138



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: blue

FBS 2-3,5 GY - Plug-in bridge

3213153

https://www.phoenixcontact.com/pc/products/3213153



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: gray

FBS 3-3,5 GY - Plug-in bridge

3213167

https://www.phoenixcontact.com/pc/products/3213167



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: gray

FBS 4-3,5 GY - Plug-in bridge

3213180

https://www.phoenixcontact.com/pc/products/3213180



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: gray

FBS 5-3,5 GY - Plug-in bridge

3213183

https://www.phoenixcontact.com/pc/products/3213183



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: gray

FBS 10-3,5 GY - Plug-in bridge

3213196

https://www.phoenixcontact.com/pc/products/3213196



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: gray

FBS 20-3,5 GY - Plug-in bridge

3213206

https://www.phoenixcontact.com/pc/products/3213206



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: gray

FBS 50-3,5 - Plug-in bridge

3000706

https://www.phoenixcontact.com/pc/products/3000706



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: red

Max. current carrying capacity: 17.5 A

FBS 50-3,5 BU - Plug-in bridge

3000708

https://www.phoenixcontact.com/pc/products/3000708



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: blue

Max. current carrying capacity: 17.5 A

PT 1,5/S-QUATTRO-PE - Protective conductor terminal block

3208333

https://www.phoenixcontact.com/pc/products/3208333

FBS 50-3,5 GY - Plug-in bridge

3000707

https://www.phoenixcontact.com/pc/products/3000707



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: gray

Max. current carrying capacity: 17.5 A

GBS-ZB/26X6 - Group marker label for terminal marking

0809298

https://www.phoenixcontact.com/pc/products/0809298



Group marking label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with ESL 26x6 mm or EST 25x6 mm, in the foot part with Zack marker strip, length: 29 mm

ATP-ST QUATTRO - Partition plate

3030815

https://www.phoenixcontact.com/pc/products/3030815

Partition plate, depth: 39 mm, width: 2.2 mm, height: 90.9 mm, color: gray



D-PT 1,5/S-QUATTRO - End cover

3208375

https://www.phoenixcontact.com/pc/products/3208375

End cover, depth: 24.3 mm, width: 2.2 mm, height: 63.2 mm, color: gray



PT 1,5/S-QUATTRO-PE - Protective conductor terminal block

3208333

https://www.phoenixcontact.com/pc/products/3208333

D-PT 1,5/S-QUATTRO-0,8 OG - End cover

1029591

https://www.phoenixcontact.com/pc/products/1029591

End cover, depth: 24.3 mm, width: 0.8 mm, height: 63.2 mm, color: orange



AI-S 1 - 8 TQ - Ferrule

1200293

https://www.phoenixcontact.com/pc/products/1200293

Ferrule, S-Slimline, Length contact range: 8 mm, sleeve length: 14 mm, color: turquoise



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/pc/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/pc/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/pc/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/pc/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/pc/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/pc/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/pc/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/pc/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/pc/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/pc/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/pc/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/pc/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/pc/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/pc/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/pc/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/pc/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/pc/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/pc/products/1206573

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/pc/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

ZB 3,5:UNBEDRUCKT - Zack marker strip

0829414

https://www.phoenixcontact.com/pc/products/0829414



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 3.5 mm

ZB 3,5 CUS - Zack marker strip

0829415

https://www.phoenixcontact.com/pc/products/0829415




Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 3.5 mm

ZB 3,5,LGS:FORTL.ZAHLEN - Zack marker strip

0801404

https://www.phoenixcontact.com/pc/products/0801404




Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 3.5 mm

ZB 3,5,QR:FORT.ZAHLEN - Zack marker strip

0801405

https://www.phoenixcontact.com/pc/products/0801405



Zack marker strip, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 3.5 mm

UCT-TM 3,5 - Marker for terminal blocks

0829484

https://www.phoenixcontact.com/pc/products/0829484



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 102, text field height: 10.5 mm, text field width: 2.95 mm

UCT-TM 3,5 CUS - Marker for terminal blocks

0829581

https://www.phoenixcontact.com/pc/products/0829581



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 3.5 mm, Number of individual labels: 102, text field height: 10.5 mm, text field width: 2.95 mm

GBS 3,5-25X3,5 - Group marker label for terminal marking

0830290

https://www.phoenixcontact.com/pc/products/0830290



Group marking label, snaps into terminal center for push-in terminal blocks ...1.5/S,
Lettering field 25 x 3.5 mm, pitch 3.5 mm, labeled with EML (24 x 3)R

GBS 3,5-25X12 - Group marker label for terminal marking

0830292

https://www.phoenixcontact.com/pc/products/0830292



Group marking label, snaps into terminal center for push-in terminal blocks ...1.5/S,
Lettering field 25 x 12 mm, pitch 3.5 mm, labeled with EML (25.4 x 12.7)R

MPS-MT - Test plug

0201744

https://www.phoenixcontact.com/pc/products/0201744



Test plug, with solder connection up to 1 mm^2 conductor cross-section, number of positions: 1, color: gray

MPS-IH WH - Insulating sleeve

0201663

https://www.phoenixcontact.com/pc/products/0201663

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

https://www.phoenixcontact.com/pc/products/0201676

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

https://www.phoenixcontact.com/pc/products/0201689

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

https://www.phoenixcontact.com/pc/products/0201692

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

https://www.phoenixcontact.com/pc/products/0201702

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

https://www.phoenixcontact.com/pc/products/0201728

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

https://www.phoenixcontact.com/pc/products/0201731

Insulating sleeve, color: black



TMT (EX9,5)R - Marker for terminal blocks

0828295

https://www.phoenixcontact.com/pc/products/0828295



Marker for terminal blocks, Roll, white, unmarked, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: latching, snap into tall marker groove, for terminal block width: 30000 mm, Number of individual labels: 1, roll length: 30 m, text field height: 9.5 mm, text field width: 50000 mm

US-TM 100 - Marker for terminal blocks

0829255

https://www.phoenixcontact.com/pc/products/0829255



Marker for terminal blocks, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: latching, Number of individual labels: 13, text field height: 9.8 mm, text field width: 104 mm

PS-3,5 - Test plug

3031010

https://www.phoenixcontact.com/pc/products/3031010



Test plug, Modular test plug, number of positions: 1, color: red

DP PS-3,5 - Spacer plate

3031011

https://www.phoenixcontact.com/pc/products/3031011



Spacer plate, depth: 33.5 mm, width: 3.5 mm, height: 15.9 mm, number of positions: 1, color: red

PS-3,5/E - Test plug

3031012

https://www.phoenixcontact.com/pc/products/3031012




Test plug, Individual test plug, number of positions: 1, color: red

ZBF 3,5:UNBEDRUCKT - Zack Marker strip, flat

0829392

https://www.phoenixcontact.com/pc/products/0829392



Zack Marker strip, flat, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 3.5 mm

ZBF 3,5 CUS - Zack Marker strip, flat

0829394

https://www.phoenixcontact.com/pc/products/0829394



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 3.5 mm

ZBF 3,5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0801406

https://www.phoenixcontact.com/pc/products/0801406




Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5. 15 mm, text field width: 3.5 mm

ZBF 3,5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0801407

https://www.phoenixcontact.com/pc/products/0801407



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5. 15 mm, text field width: 3.5 mm

UCT-TMF 3,5 - Marker for terminal blocks

0829486

https://www.phoenixcontact.com/pc/products/0829486



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 108, text field height: 4.7 mm, text field width: 2.7 mm

UCT-TMF 3,5 CUS - Marker for terminal blocks

0829644

https://www.phoenixcontact.com/pc/products/0829644



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, Number of individual labels: 108, text field height: 4.7 mm, text field width: 2.7 mm

SZF 0-0,4X2,5 - Screwdriver

1204504

https://www.phoenixcontact.com/pc/products/1204504



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

ST-BW 0 - Actuation tool

1200135

https://www.phoenixcontact.com/pc/products/1200135



Actuation tool, for all 1.5 mm^2 spring cages from PT 1,5/S and FT 1,5/S

PT 1,5/S-QUATTRO-PE - Protective conductor terminal block

3208333

https://www.phoenixcontact.com/pc/products/3208333

PROJECT COMPLETE - Software

1050453

https://www.phoenixcontact.com/pc/products/1050453



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com