




Part Number : [351890110](#)
Product Description : 4.75mm Tab, MP-Lock
Housing, 1 Circuit, UL94V-2, Natural
Series Number : 35189
Status : Active
Product Category : Connector Housings

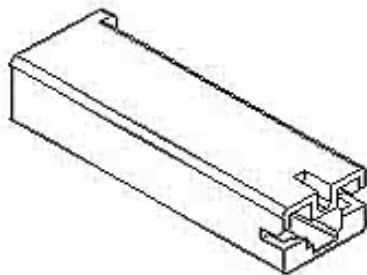

Documents and Resources

Drawings

[351890110_sd.pdf](#)

Specifications

[PK-35189-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)6375-DC (05 Nov 2025)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Connector Housings
Series	35189
Description	4.75mm Tab, MP-Lock Housing, 1 Circuit, UL94V-2, Natural
Application	Power
Product Name	MP-Lock
UPC	800753340589

Agency

UL	E29179
----	--------

Physical

Circuits (maximum)	1
Color - Resin	Natural
Flammability	94V-2
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Resin	Nylon
Net Weight	0.466/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	N/A
Pitch - Termination Interface	N/A
Polarized to Mating Part	Yes

Stackable	No
Temperature Range - Operating	-40° to +105°C

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mates With	Appliance Timer, Appliance Capacitor, Appliance Heater

Use with Part(s)

Description	Part Number
MP-Lock Female Quick Disconnects	<u>35068</u>