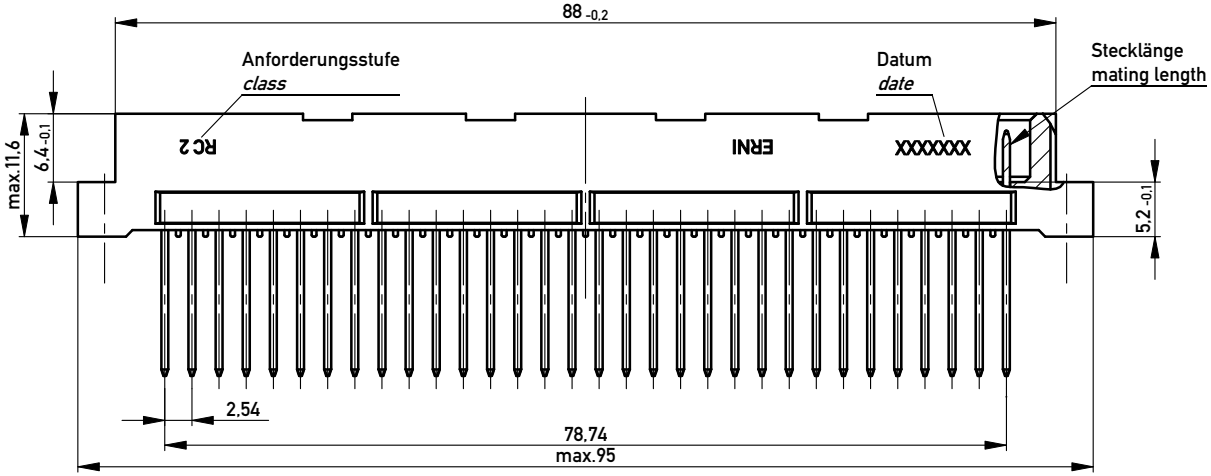
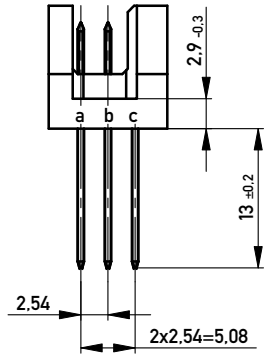
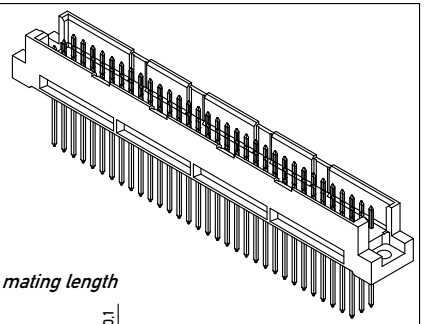



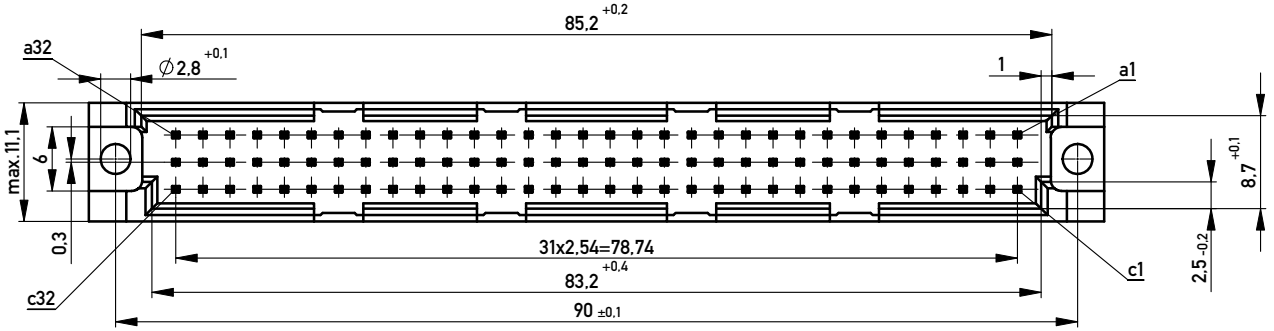



Stecklänge / *mating length*



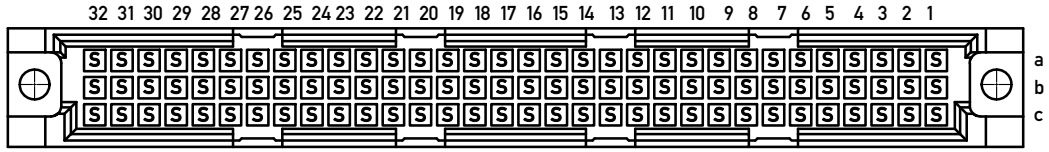

E = *early mate, late break* / voreilend
S = standard
L = *late mate, early break* / nacheilend



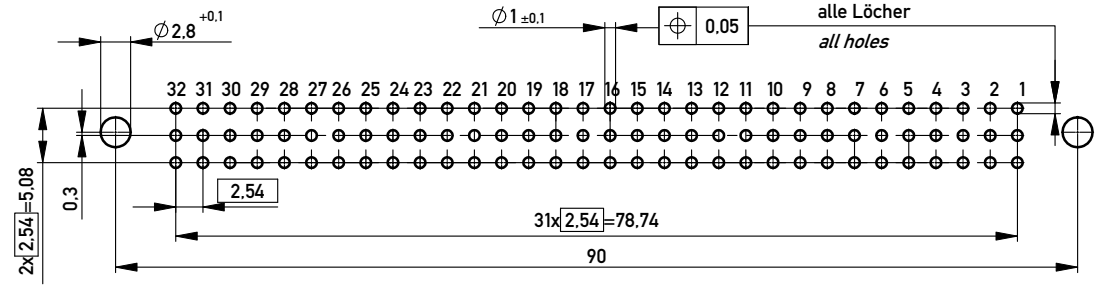

Lötanschluß 0,6x0,6mm /
*Solder Terminal 0,6x0,6mm*
Isolierwerkstoff */ housing material : PBT GF 30*
Bauart 4 / *type 4*
Anforderungsstufe 2 = 400 Steckzyklen */ performance class 2 = 400 mating cycles*
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
*Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2*

Bedruckung siehe Zeichnung 294905
*Marking see drawing 294905*

Bestückungsplan / *contact layout*




Leiterplatten-Lochbild / *PCB drillhole pattern*




Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

| | | | |
|---|---|---|---|
| Information: | Tolerances: All Dimensions in mm | Scale 2:1 | |
| All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Subject to modification without prior notice. Drawing will not be updated. | Designation: Messerleiste R 96 Löt / *Male Connector R 96 Solder* | |
| | ERNI www.ERNI.com | 374001 | I |
| B / Index | 15.02.2010 / Date | Class STVR | A3 |