
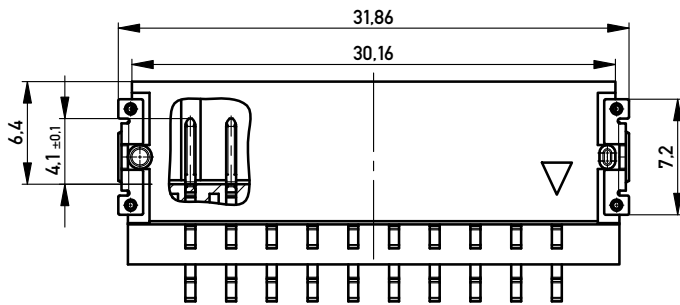
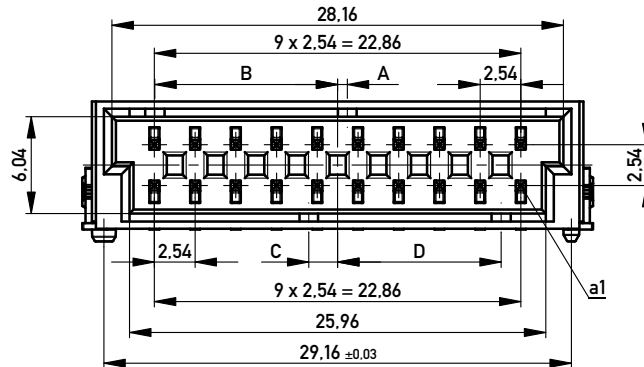


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 380 Stück
Packaging unit: 380 pcs




Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

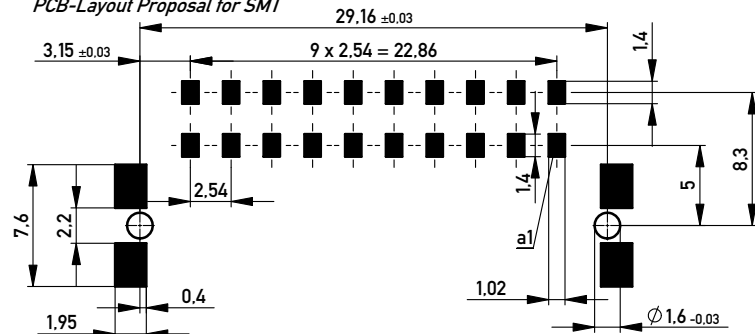

Abspulrichtung - Reel off Direction

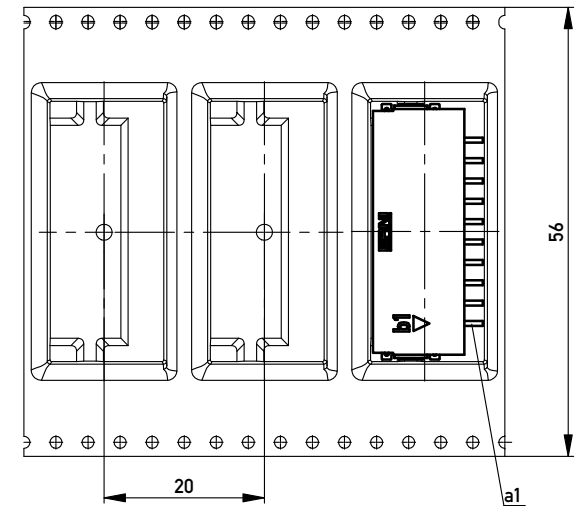

374320		rot red	5.4	6.6	0.6	11.4	
374319		grün green	3.6	8.4	5.4	6.6	
374318		blau blue	1.8	10.2	3.6	8.4	
374317		schwarz black	0.6	11.4	1.8	10.2	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Information:		Tolerances		Scale	3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
a		27.11.2013		M 2.54 DRC-B, 20-polig	
Index		Date		324051	
				I	
				A3	
				Class	
				DRCB	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.

ERNI www.ERNI.com