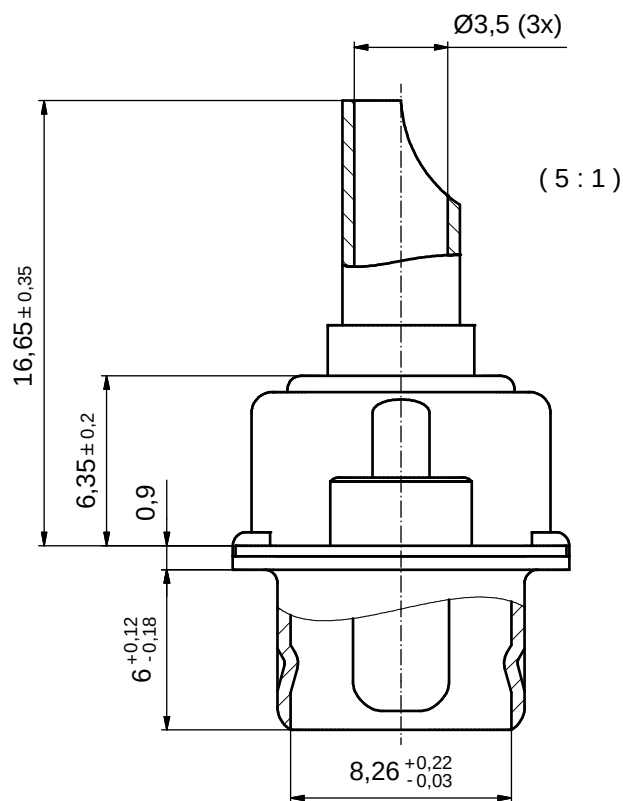
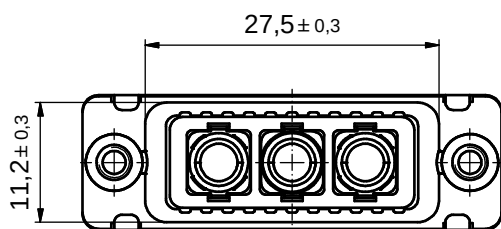
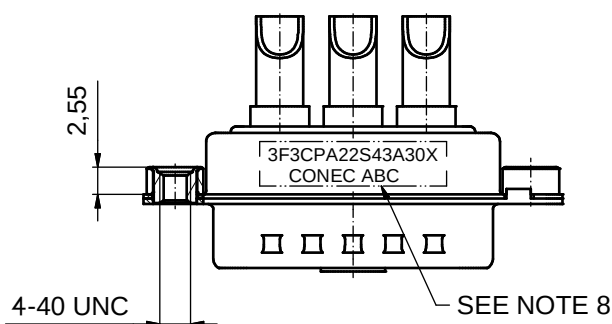
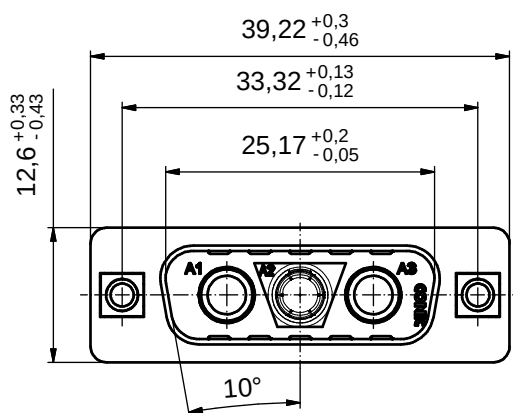
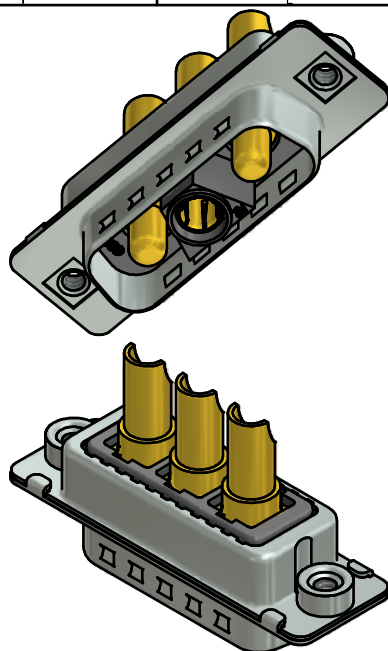


NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATOR: PBT GF UL 94 V-0, BLACK
- HIGH POWER CONTACTS 30A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 10-12
MALE CONTACT ON POS. A1 and A3, FEMALE CONTACT ON POS. A2
- THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- CAPACITANCE: 47 nF ± 20%
- DIELECTRIC WITHSTANDING VOLTAGE: 707 VDC
- CONNECTOR IS PART MARKED: 3F3CPA22S43A30X CONEC ABC

SOLDER INSTRUCTION:

- THE WIRE HAVE TO BE PRETINNED
- SOLDER TEMPERATURE max. 350°C
- SOLDER TIME max. 15s

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH													
DO NOT ALTER CAD DRAWING BY HAND				tolerance			 dim. in mm	scale: 2:1 (5:1)					
								material: SEE NOTES					
								date	name	D-SUB FILTER COMBINATION MALE 3F3CP SOLDER CUP with threaded insert			
								drawn 16.06.2015	Heinrich				
								appd. 16.06.2015	Lehmenkühler				
								norm					
								d-old					
											dwg no: 24K1A1598		DIN-A3
				a	Original								sh: 1
				rev.	description	date	name				part no: 3F3CPA22S43A30X		

DIN-A3
sh: 1