
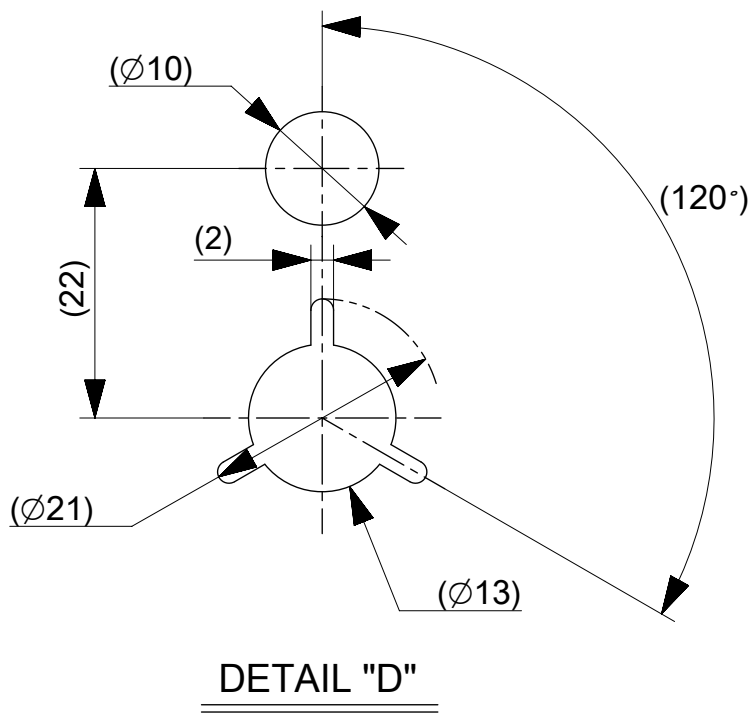
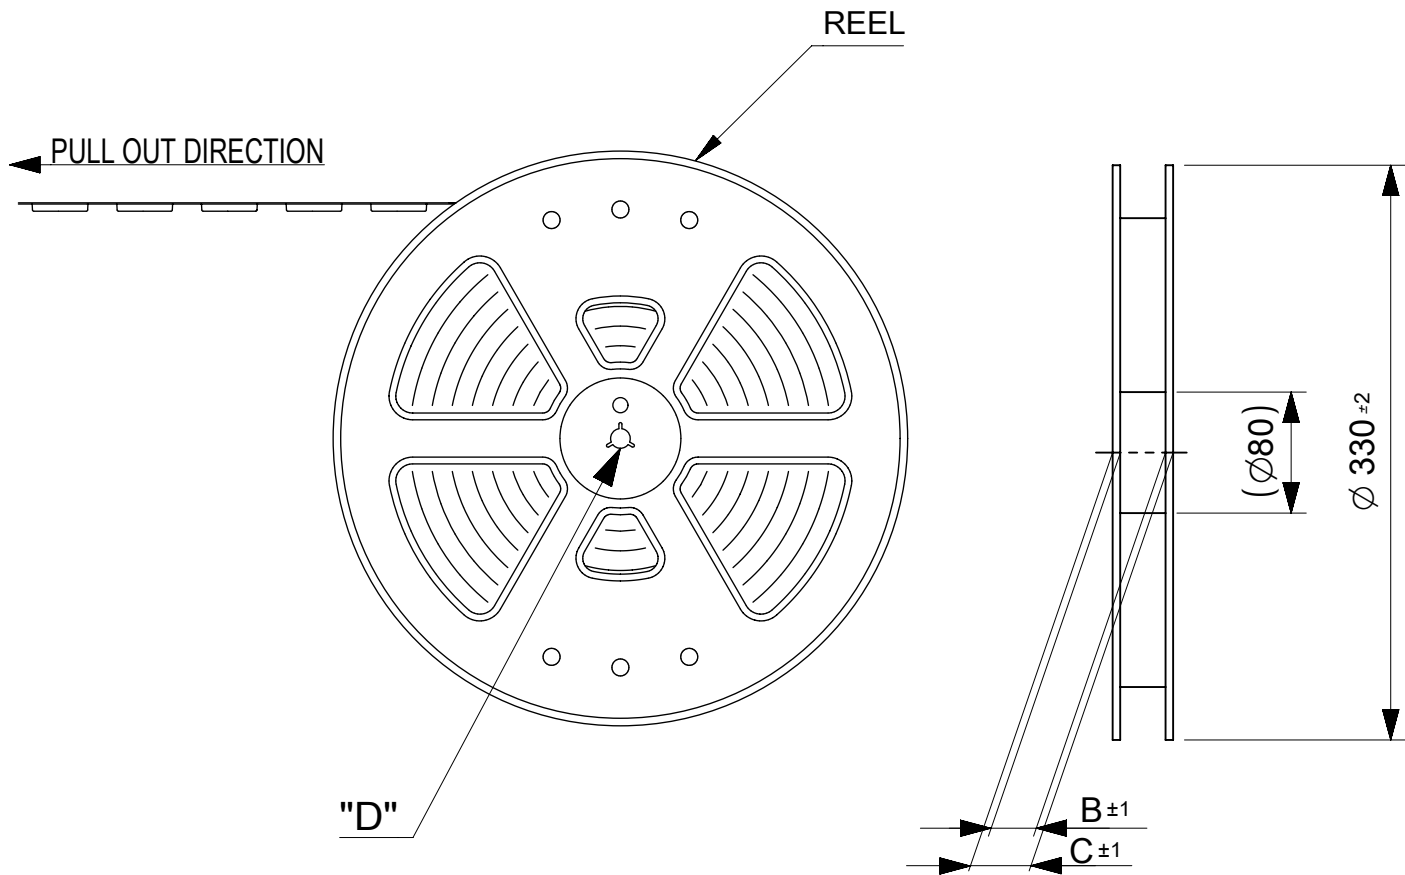







NOTES

- RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
 - NUMBER OF CONNECTORS : 5000PCS/REEL
 - LEAD TAPE LENGTH
-
- TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
 - MATERIAL
CARRIER TAPE : POLYSTYRENE
TOP TAPE : PET , OTHER
REEL : POLYSTYRENE (PS) < RECYCLE MATERIAL CONTAINED >
 - ELV AND RoHS COMPLIANT

MODEL NO. 505274**40


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
EC NO: 103765 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/03/22 2016/03/24 2016/03/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®							
				MM		1:1									
		ANGULAR TOL ± 3.0 °		DRWN BY		DATE		0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG							
		4 PLACES ± 0.03		NOKIMOTO		2016/03/22									
		3 PLACES ± 0.03		CHK'D BY		DATE									
		2 PLACES ± 0.05		RTAKEUCHI		2016/03/24									
		1 PLACE ± 0.1		APPR BY		DATE		PRODUCT CUSTOMER DRAWING							
		0 PLACES ± 0.2		KMORIKAWA		2016/03/25									
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION			SERIES		MATERIAL NUMBER		CUSTOMER		
				A3					505274		SEE CHART		GENERAL		
							DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER		
A		REV						5052740000		PSD		001		1 OF 3	


RELEASE STATUS P1 RELEASE DATE 25.03.2016 07:36:55

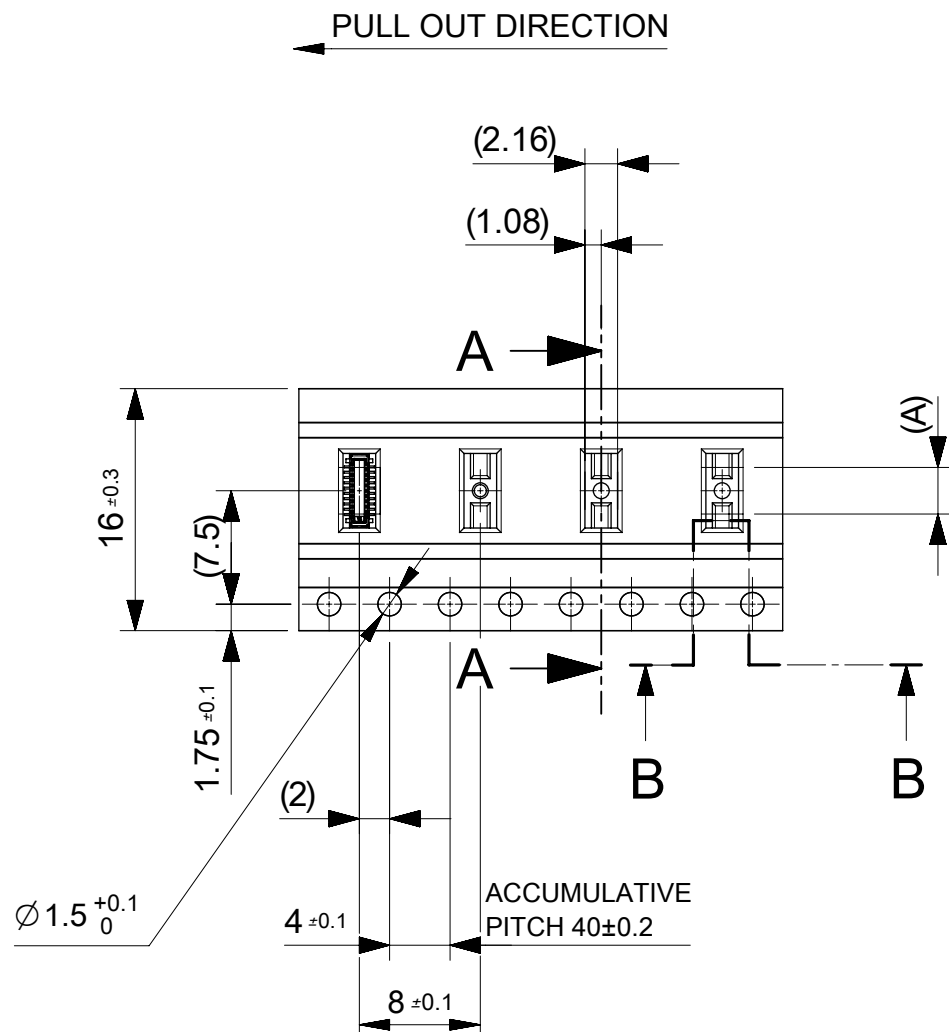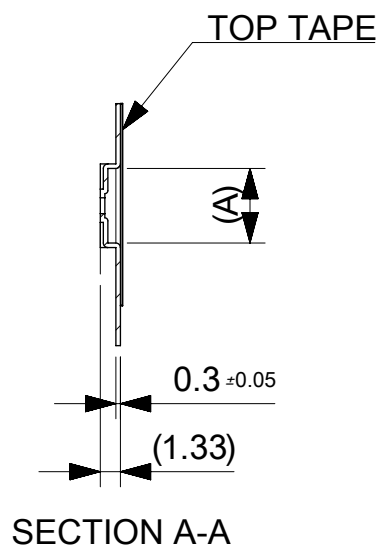



16	21.4	17.4	6.68	5052743040	○	---	30
			5.63	5052742440	○	---	24
			4.93	5052742040	○	---	20
			4.23	5052741640	○	---	16
			3.18	5052741040	○	---	10
			2.48	5052740640	○	---	6
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
				ORDER NO.	SAMPLE PREPARATION ○:TOOLED △:WOOK IN PROCESS ---:TOOLING TO BE CONFIRMED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 103765 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/03/22	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		molex®					
	2016/03/24		MM	2:1								
	2016/03/25		ANGULAR TOL ± 3.0 °		DRWN BY NOKIMOTO		DATE 2016/03/22					
	4 PLACES ± 0.03		CHK'D BY RTAKEUCHI		DATE 2016/03/24							
	3 PLACES ± 0.03		APPR BY KMORIKAWA		DATE 2016/03/25							
	2 PLACES ± 0.05		DRAWING SIZE A3		THIRD ANGLE PROJECTION							
	1 PLACE ± 0.1											
	0 PLACES ± 0.2											
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
	A		REV	0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG								
PRODUCT CUSTOMER DRAWING							SERIES 505274		MATERIAL NUMBER SEE CHART		CUSTOMER GENERAL	
DOCUMENT NUMBER 5052740000				DOC TYPE PSD		DOC PART 001		SHEET NUMBER 2 OF 3				

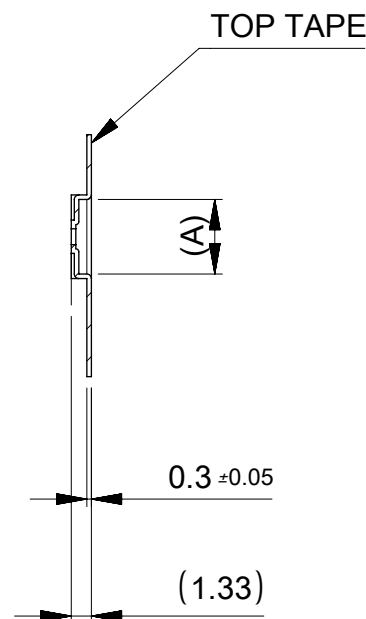

SECTION C-C

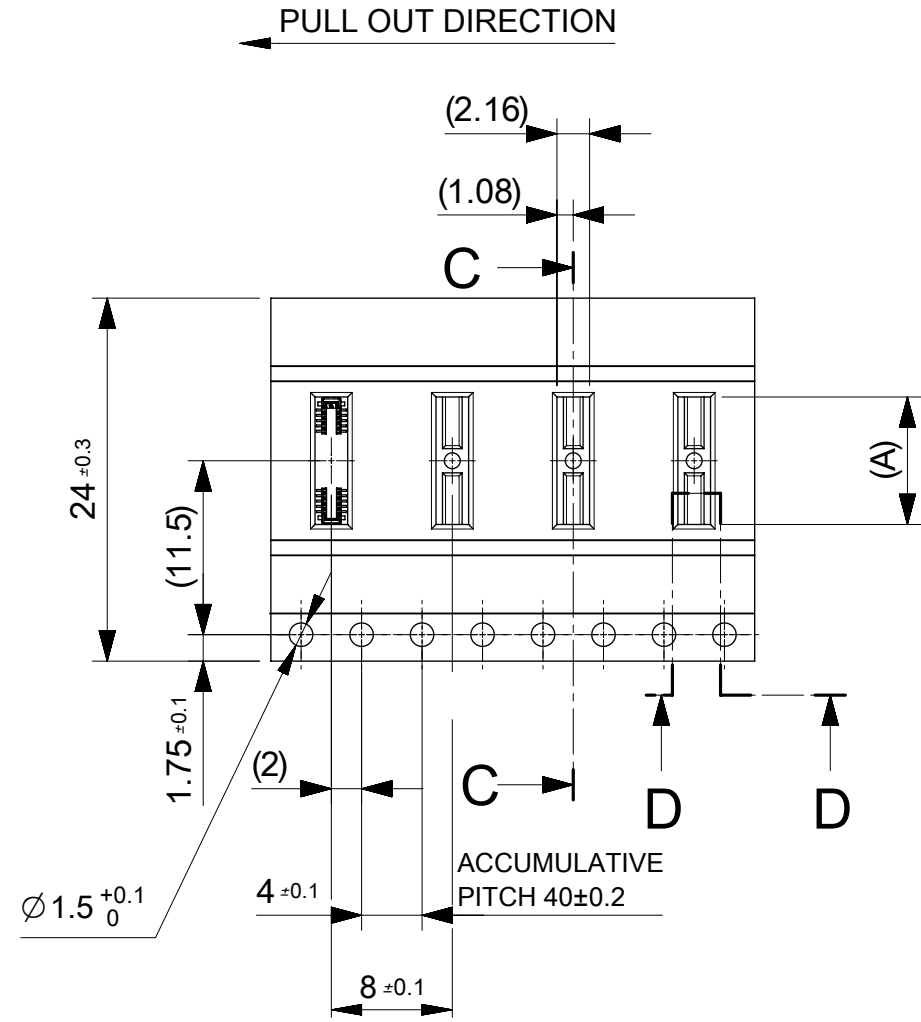

SECTION D-D

24	29.4	25.4	10.88	5052745440	○	---	54
			10.18	5052745040	---	○	50
			9.13	5052744440	---	---	44
			8.43	5052744040	○	---	40
			7.38	5052743440	○	---	34
			7.03	5052743240	---	---	32
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
				ORDER NO.	SAMPLE PREPARATION ○:TOOLED △:WOOK IN PROCESS ---:TOOLING TO BE CONFIRMED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2016/03/22
2016/03/24
2016/03/25

EC NO: 103765
DRWN: NOKIMOTO
CHK'D: RTAKEUCHI
APPR: KMORIKAWA

A

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 3.0 °

4 PLACES	± 0.03
3 PLACES	± 0.03
2 PLACES	± 0.05
1 PLACE	± 0.1
0 PLACES	± 0.2

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION UNITS
MM

SCALE
2:1

DRWN BY
NOKIMOTO

DATE
2016/03/22

CHK'D BY
RTAKEUCHI

DATE
2016/03/24

APPR BY
KMORIKAWA

DATE
2016/03/25

DRAWING SIZE
A3


THIRD ANGLE PROJECTION



molex[®]

0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG


PRODUCT CUSTOMER DRAWING

SERIES 505274	MATERIAL NUMBER SEE CHART	CUSTOMER GENERAL
DOCUMENT NUMBER 5052740000		DOC TYPE PSD
DOC PART 001		SHEET NUMBER 3 OF 3

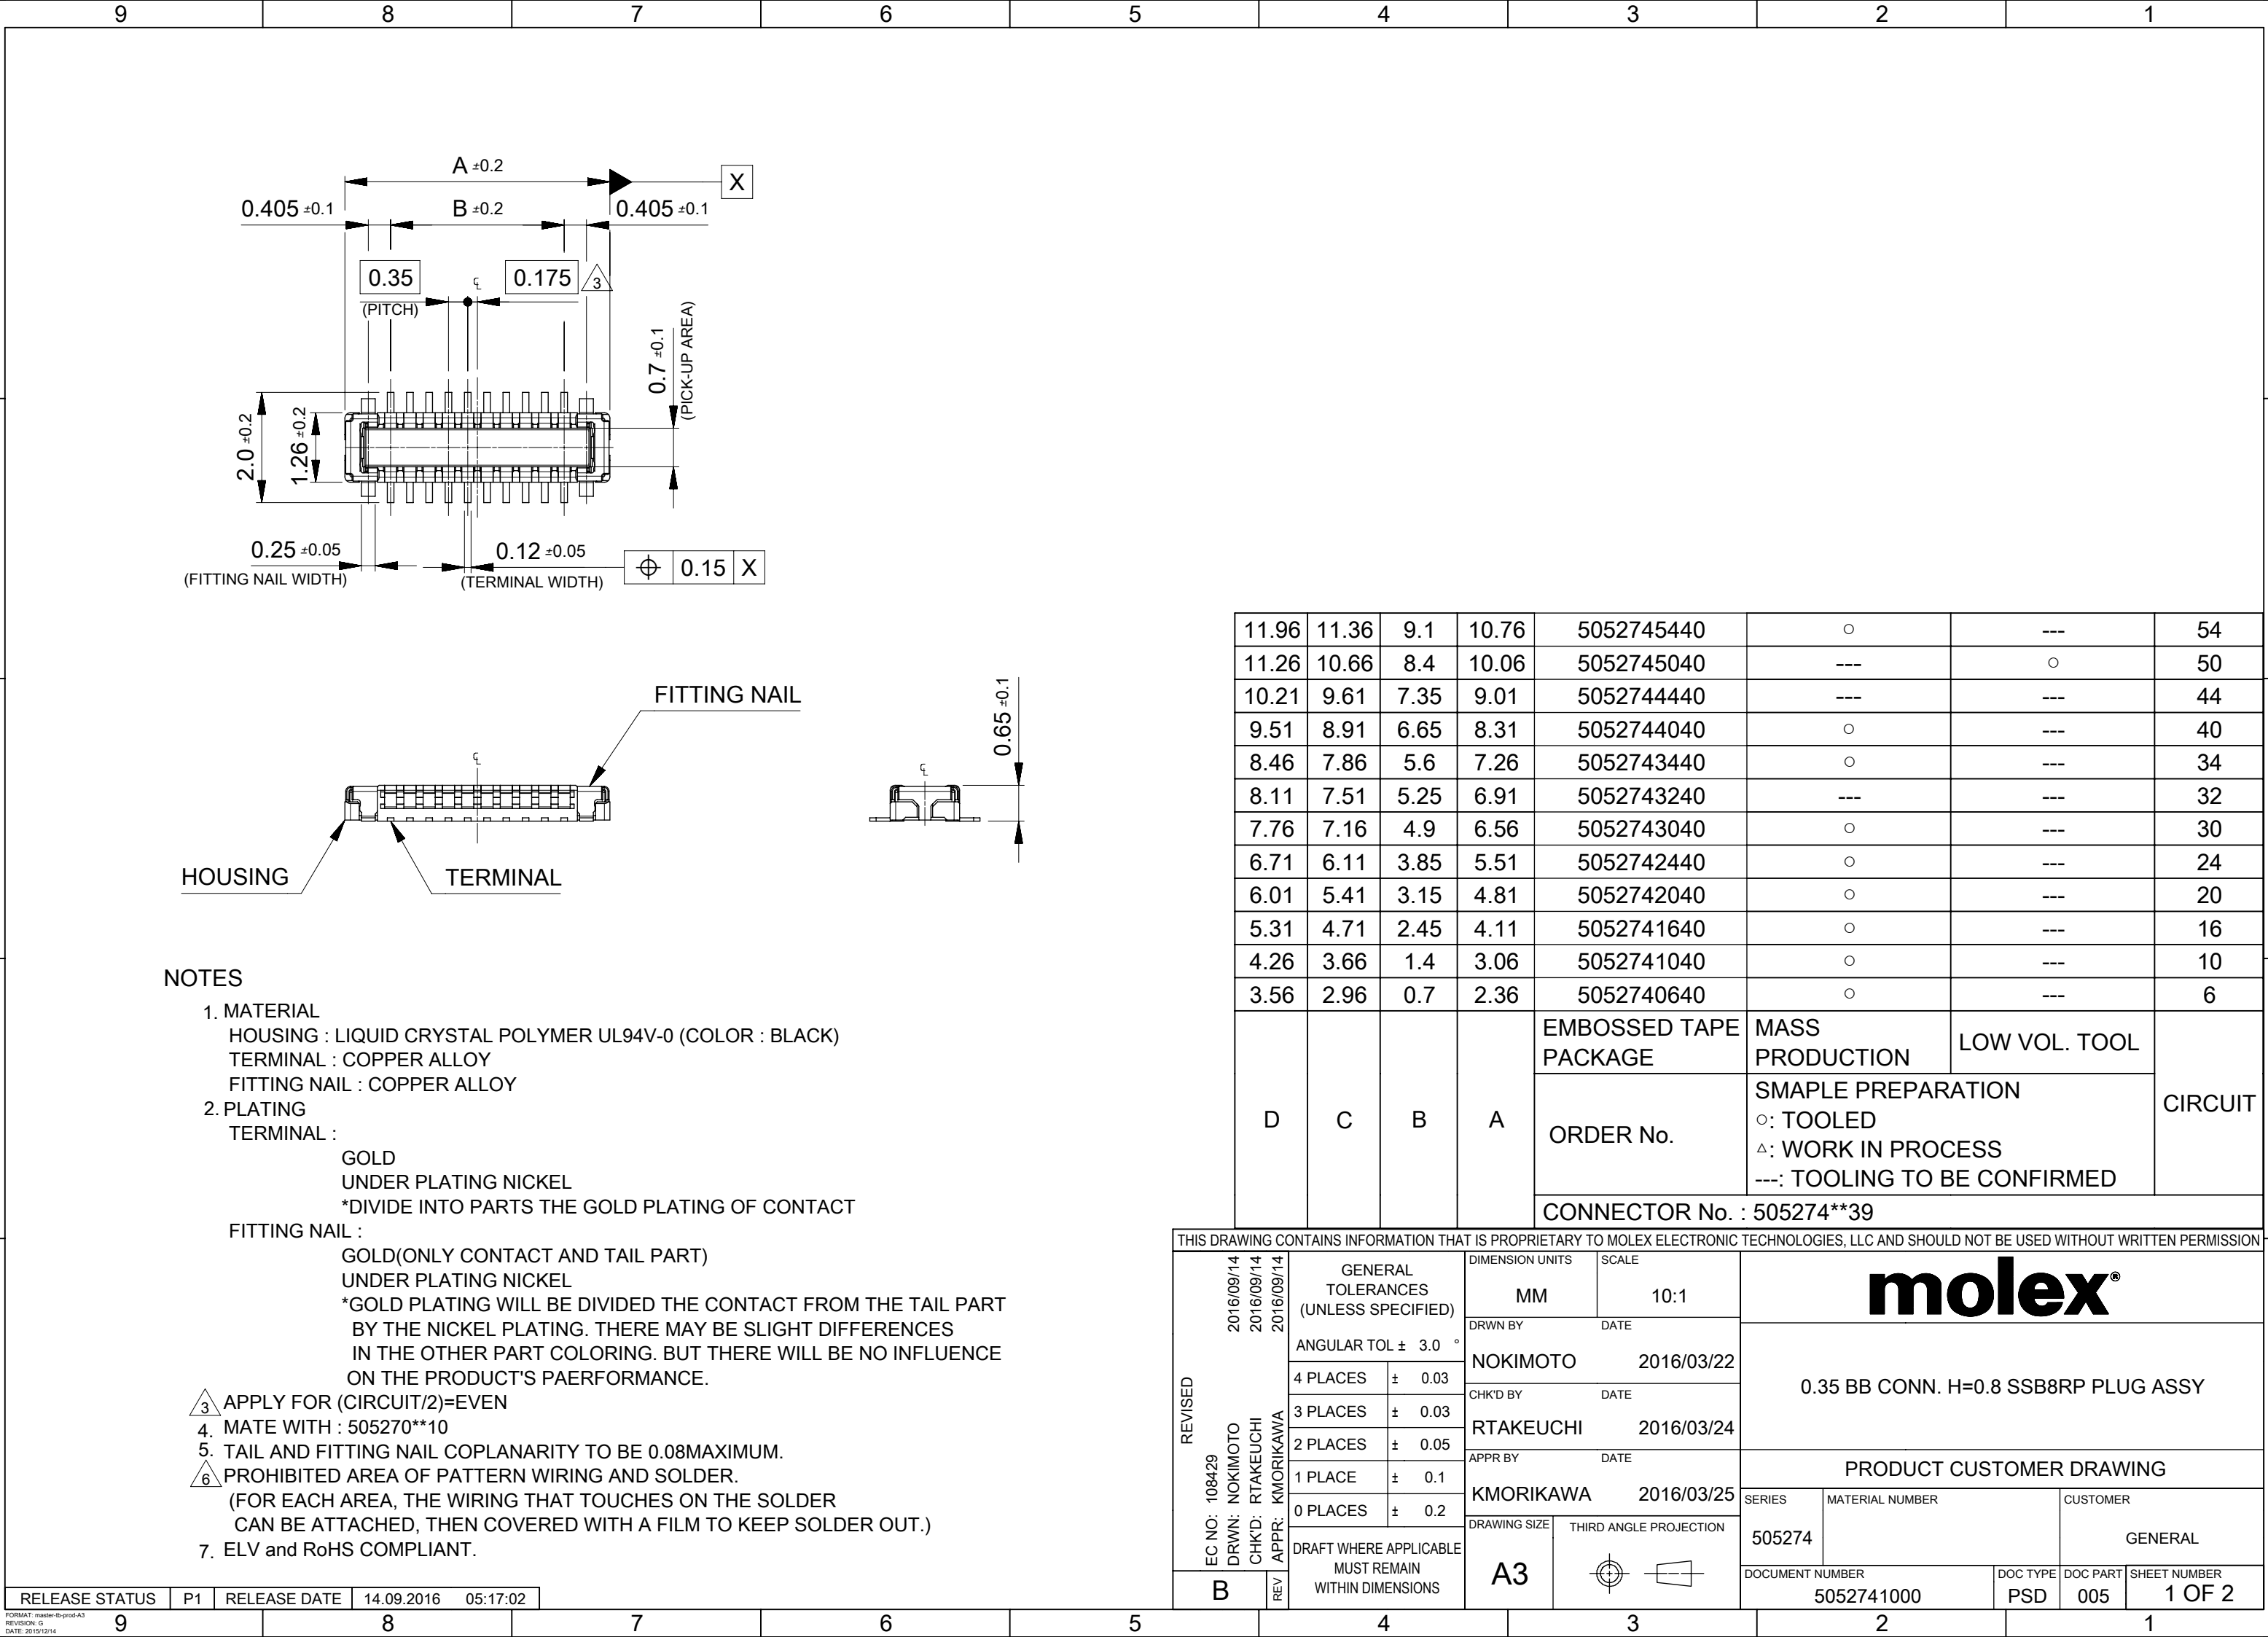

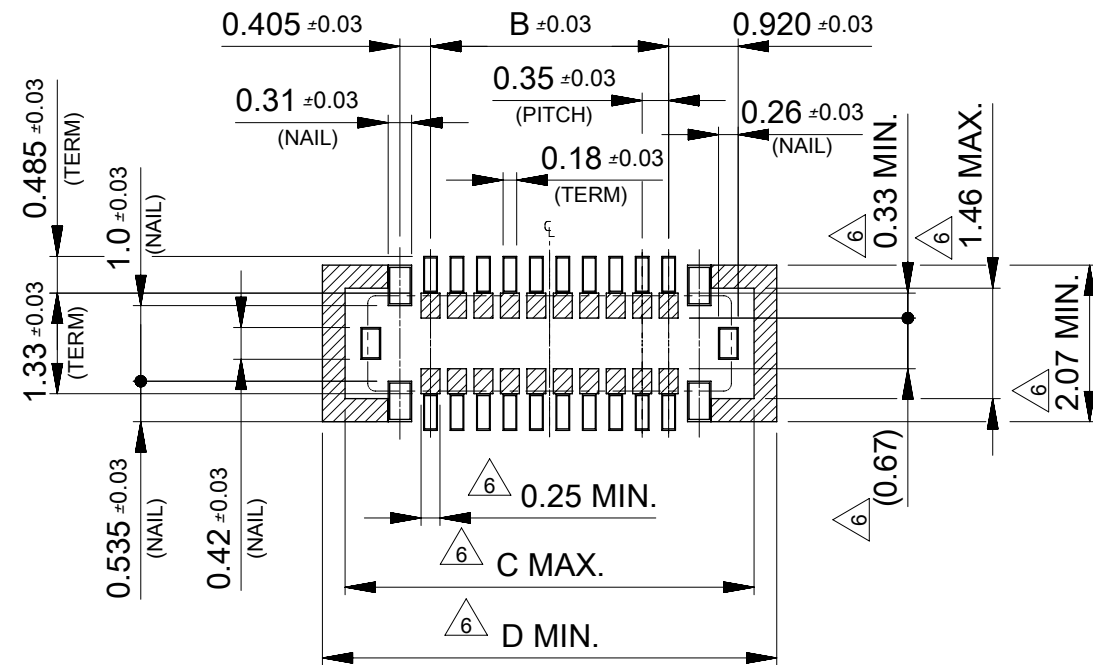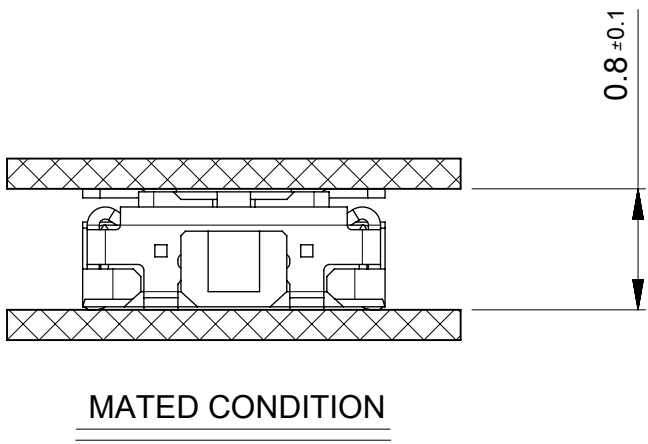


RECOMMENDED P.W.BOARD PATTERN LAYOUT (REFERENCE)

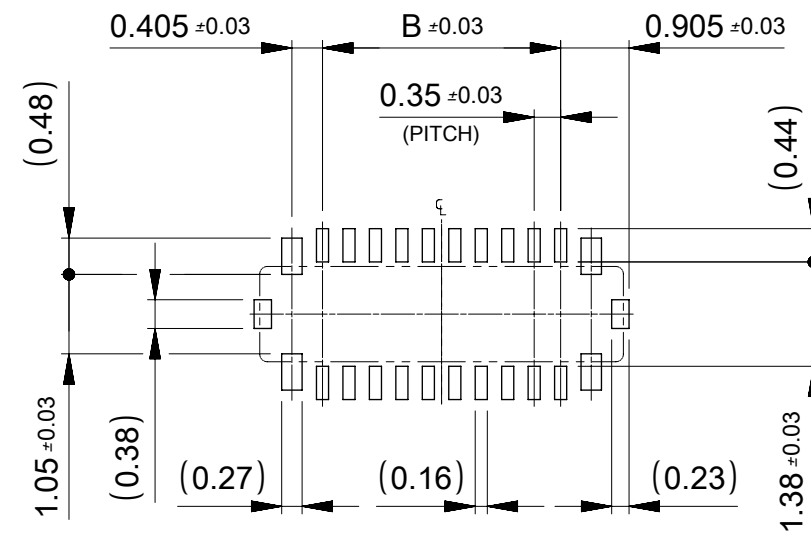

RECOMMENDED METAL MASK LAYOUT (REFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : t=0.08mm
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 80%

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
REVISED	EC NO: 108429 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/09/14	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®						
		2016/09/14			MM		10:1								
		2016/09/14			ANGULAR TOL ± 3.0 °		DRWN BY		DATE		0.35 BB CONN. H=0.8 SSB8RP PLUG ASSY				
		2016/09/14			4 PLACES ± 0.03		NOKIMOTO		2016/03/22						
		2016/09/14			3 PLACES ± 0.03		CHK'D BY		DATE						
		2016/09/14			2 PLACES ± 0.05		RTAKEUCHI		2016/03/24						
		2016/09/14			1 PLACE ± 0.1		APPR BY		DATE		PRODUCT CUSTOMER DRAWING				
		2016/09/14			0 PLACES ± 0.2		KMORIKAWA		2016/03/25						
		B			REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER		CUSTOMER
								A3		505274			GENERAL		
								DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER			
								5052741000		PSD	005	2 OF 2			