

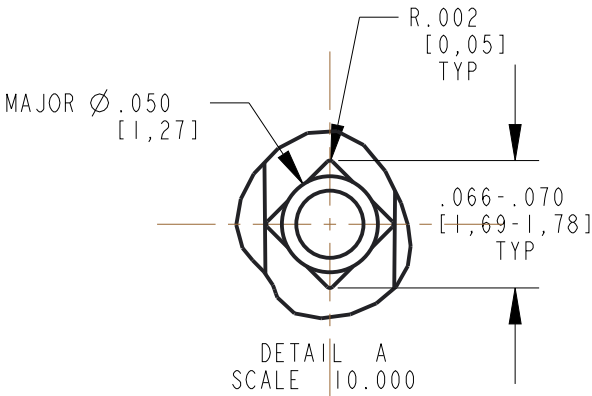
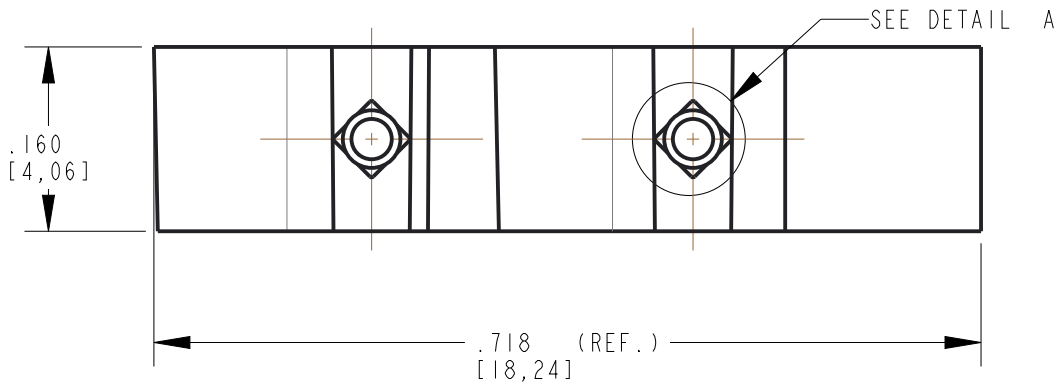
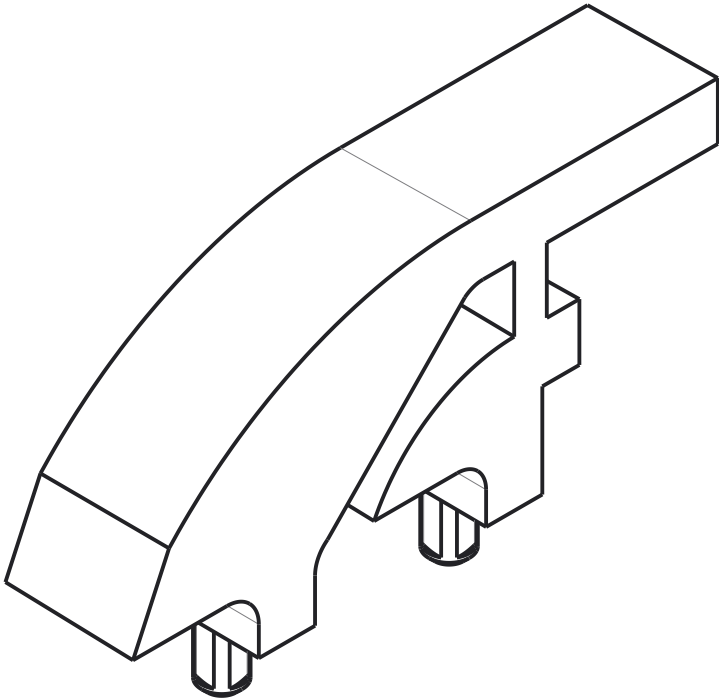
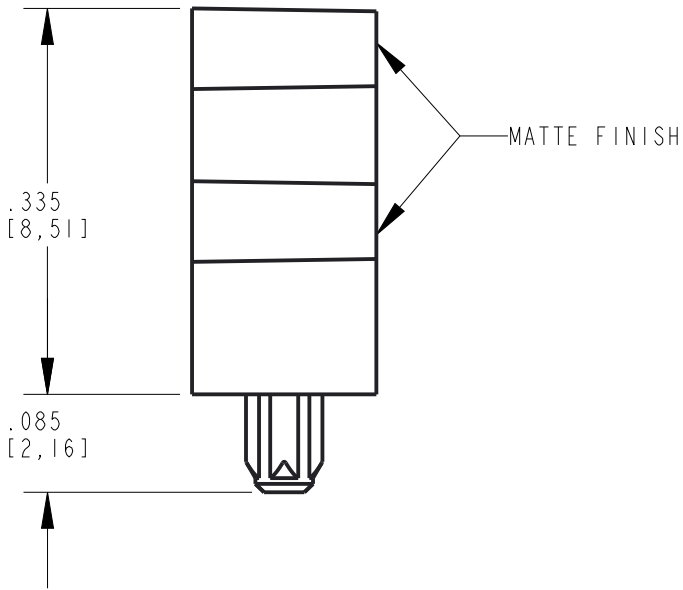


REV	ECN NO	REVISIONS	DRN	CKD	APP	QA	CM	DATE
A	106118	NEW RELEASE	LD	CS	NO			6-8-23

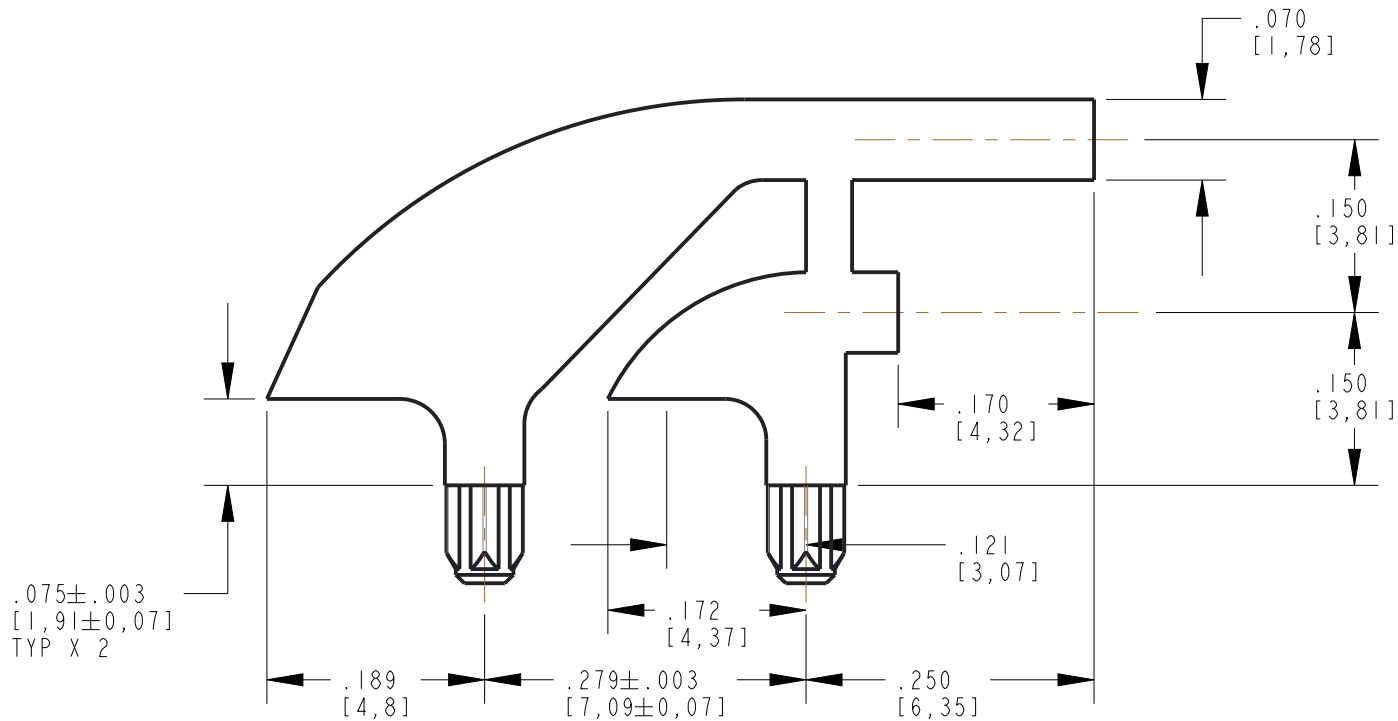

RECOMMENDED HOLE & PAD LAYOUT

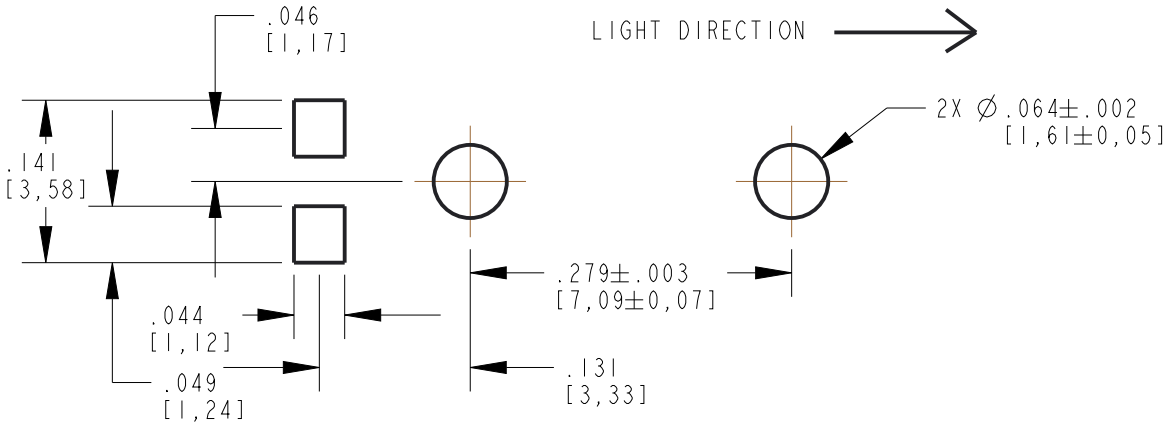

NOTES:

- DIALIGHT PART NUMBER 515-1217F
- MATERIAL TO BE CLEAR, TRANSMISSABLE POLYCARBONATE (UL 94V-0 FLAMABILITY).
- COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
- STORAGE AND OPERATING TEMPERATURE: -30 C TO +100 C.
- RECOMMENDED SURFACE MOUNT DIALIGHT LEDS: 597-3XXX-507F (1208 PKG SINGLE COLOR)

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 6.000	DRAWING NUMBER	REV
ALL DIM'S: INCH (mm)	C-18072	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: $\pm 1/64$	SINGLE ELEMENT LP	
DECIMALS (.XX): $\pm .010$	.070" X .160" RECT	
DECIMALS (.XXX): $\pm .005$	MATERIAL	
ANGLES: $\pm 1^\circ$	SEE BOM	
FINISH	Dialight	
FSCM 83330	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
SHEET 1 OF 1	FAMILY TABLE:	