6-1971775-3 ✔ ACTIVE


Power Triple Lock


TE Internal #: 6-1971775-3

6 Position, Cap, Housing, Crimp, Wire-to-Wire, UL 94V-0, 6 mm [.236 in] Centerline, 2 Row, 600 VAC, Wire & Cable, Power, Power Triple Lock

View on TE.com >

Connectors > Rectangular Connectors > Standard Rectangular Connectors > POWER TRIPLE LOCK High Temperature Caps

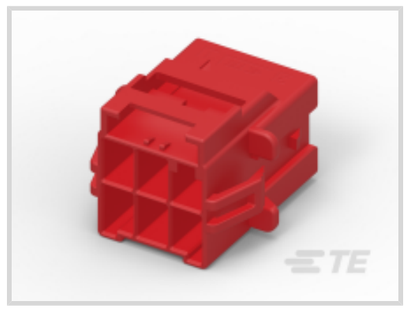

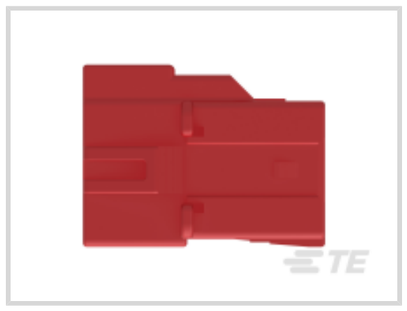
Connector Product Type: **Housing**

Connector & Housing Type: **Cap**

Termination Method to Wire & Cable: **Crimp**

Connector System: **Wire-to-Wire**

Contact Retention Within Housing: **Without**

All POWER TRIPLE LOCK High Temperature Caps (44)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Cap
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	6
Number of Rows	2
Number of Power Positions	6

Electrical Characteristics

Operating Voltage	600 VDC

Body Features

Connector & Keying Code	B
Primary Product Color	Red
Cable Exit Angle	180°

Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Tab

Termination Features

Termination Method to Wire & Cable	Crimp

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount

Housing Features

Centerline (Pitch)	6 mm[.236 in]
Housing Material	Nylon

Dimensions

Panel Thickness (Recommended)	1 – 2 mm[.039 – .079 in]
Connector Height	23.05 mm
Row-to-Row Spacing	8.1 mm[.319 in]

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]

Operation/Application

Circuit Application	Power

Identification Marking

Circuit Identification Feature	With

Industry Standards

Compatible With Agency/Standards Products	UL, VDE
UL Rating	Recognized
Glow Wire Material Rating	Material with GWIT ≥ 775°C
Compatible With Approved Standards Products	UL E28476

UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)

Packaging Features

Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-P87074-T111
Tab Contact — POWER TRIPLE LOCK

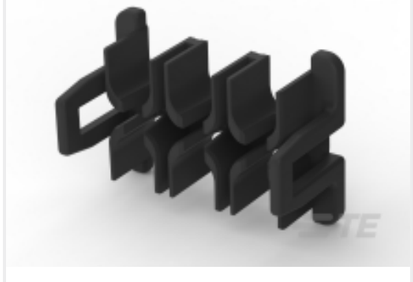

TE Part # 1971778-3
PTL TPA HIGH TEMP 2 x 3 BLACK



TE Part # 1452426-1
EXTRACTION TOOL



TE Part # 1971789-1
CPA




TE Part # 6-1971776-3
PTL 2X3 PLUG HSG HIGH TEMP KEY B RED

Also in the Series | Power Triple Lock




Connector Contacts(26)

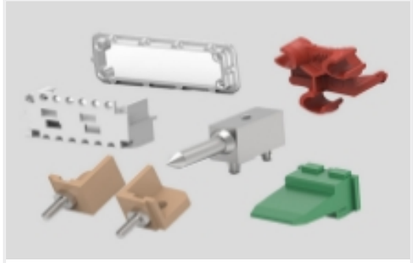

Connector Hardware(12)



Insertion & Extraction Tools(1)

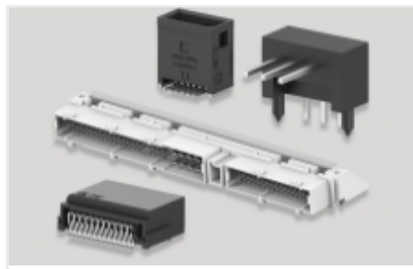


PCB Headers & Receptacles(21)



Power Contacts(26)



Rectangular Power Connectors(301)

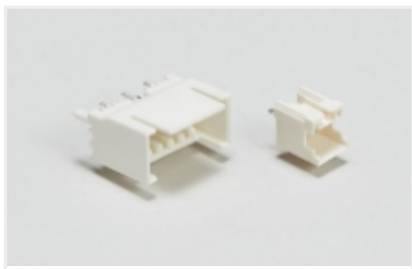

Wire-to-Board Headers & Receptacles (21)

Customers Also Bought

TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT



TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts




TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT



TE Part #DT06-2S
PLG, 2P, GRY, N

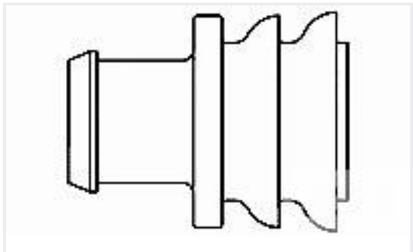

TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

Documents

Product Drawings

PTL 2X3 CAP PANEL MT HIGH TEMP KEY B RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1971775-3_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1971775-3_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1971775-3_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Agency Approvals

VDE Certificate

English

VDE Certificate

English