


Data Sheet | Item Number: 756-5401/050-050

Sensor/Actuator cable; M12A socket; straight; M12A plug; straight; 5-pole; Length: 5 m


<https://www.wago.com/756-5401/050-050>

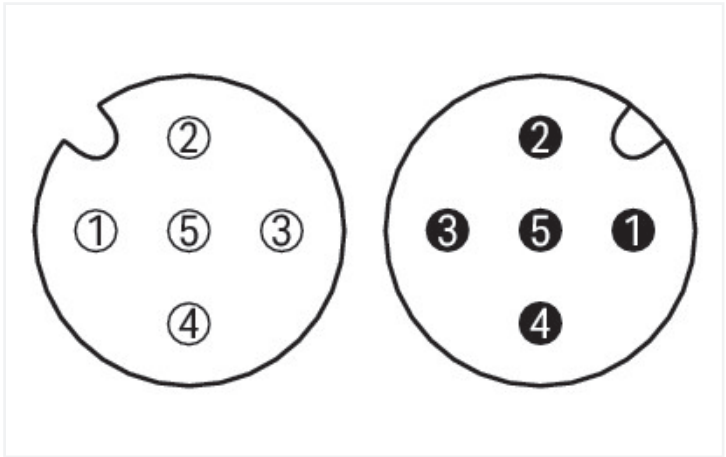

Similar to illustration

Pin 1 ... 5: 0.34 mm²

1	brown	1
2	white	2
3	blue	3
4	black	4
5	gray	5

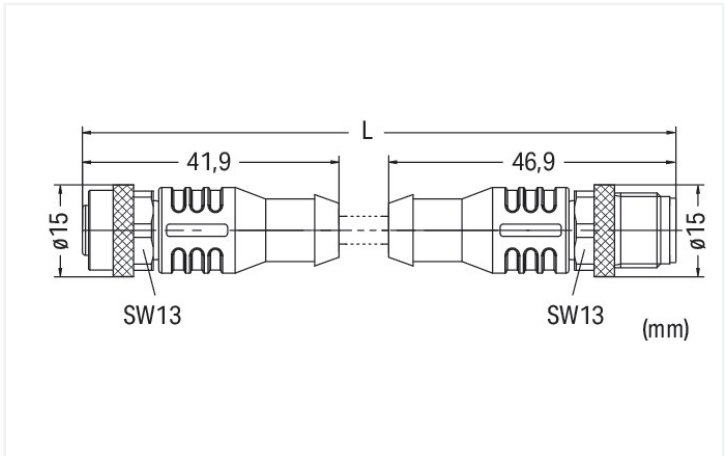

Dimensions in mm

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Technical data			
General information		General information	
Operating voltage	250 VAC/DC	Ambient (operating) temperature (static)	-50 ... +90 °C
Operating current	4 A	Ambient (operating) temperature (dynamic)	-25 ... +90 °C
Rated impulse withstand voltage	1.5 kV		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	10 mΩ		
Conductor resistance	≤ 60 Ω/km		
Pollution degree	3 per VDE 0110		
Protection type	IP67		



Drag chain compatible	
Bending radius	10 x cable diameter (min.)
Bending cycles	2 million
Acceleration (min.)	5 m/s²
Travel speed (max.)	3.33 m/s
Travel path (horizontal) max.	5 m
Travel path (vertical) max.	2 m
Torsional capacity	180 °/m

Cable	
Cable length	5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black

Connector	
Connection type	M12 Socket - M12 plug
Pole number	5
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	0 °
Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data	
Product Group	23 (I/O passive and accessories)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4055143060967
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121604
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 756-5401/050-050

Documentation

System Description
IP67 Cables and Plug- gable Connectors
pdf 157.80 KB