
Data Sheet | Item Number: 770-694

Lockout cap; 4-pole; for cutouts; Plastic; white

https://www.wago.com/770-694

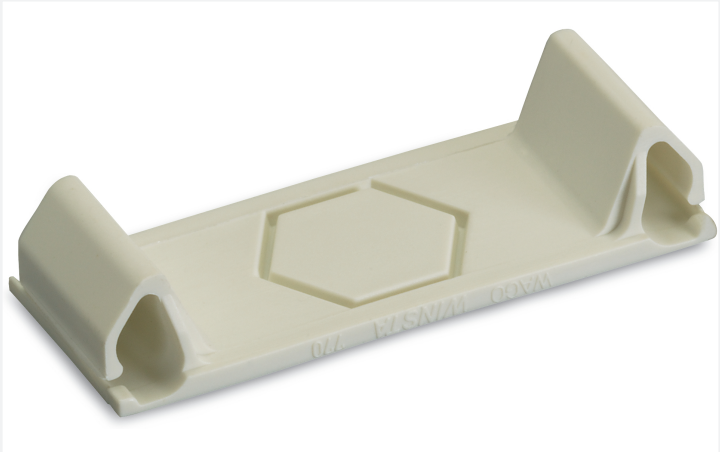

Color: white

Cover *WINSTA*® MIDI 4-pole

Realize the energy supply easily and quickly: The cover from the *WINSTA*® MIDI product line is the product of your choice for error-free electrical installation. An extensive range of accessories rounds out the WINSTA® product line from WAGO. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the included test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs.

WINSTA® MIDI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Choose quality and durability – with protection against mismating from WAGO makes the installation of electrical components visibly easier.

- pre-assembled versions
- fast, secure installation

Notes

Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Connection data

Connection 1

Pole number	4

Mechanical data

Mounting type	Snap-in flange
Suitable	for cutout

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.065 MJ
Weight	2.1 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332802154
Customs tariff number	39269097900

Product Classification

UNSPSC	39121703
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 8.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-694

Continued on next page

Documentation

Bid Text

770-694	19.02.2019	xml 2.56 KB	
770-694	13.01.2015	doc 22.50 KB	

CAD/CAE-Data

CAD data

2D/3D Models 770-694

CAE data

WSCAD Universe
770-694

ZUKEN Portal 770-694