

Data sheet | Item number: 858-150


Basic relay; Nominal input voltage: 24 VDC; 4 changeover contacts; Limiting continuous current: 5 A; with manual operation; Module width: 22 mm; Module height: 25 mm





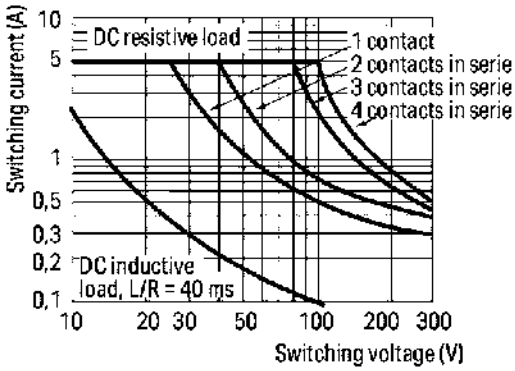

DC load limit curve

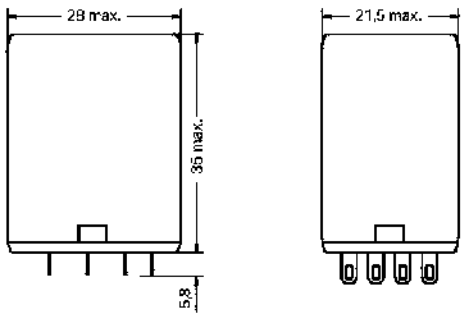

Dimensions in mm

Technical data

Control circuit

Nominal input voltage U_N	DC 24 V
Nominal input current at U_N	36.9 mA

Load circuit

Number of changeover/switchover contacts	4
Contact material (relay)	AgCe
Limiting continuous current	5 A
Inrush current (resistive) max.	(AC) 15 A / 4 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
Recommended minimum load	12 V / 100 mA
Pull-in time (typ.)	25 ms
Drop-out time (typ.)	25 ms
Bounce time (typ.)	4 ms
Electrical life (NO; resistive load; 23 °C)	100 x 10^3 switching operations
Mechanical life	20 x 10^6 switching operations

Signaling

Status indicator	Red LED mechanical

Safety and protection

Dielectric strength (control/load circuit) (AC, 1 min)	1.5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	1.5 kVrms
Protection type	IP20

Physical data

Width	21.5 mm / 0.846 inches
Height from the surface	35 mm / 1.378 inches
Depth	28 mm / 1.102 inches

Mechanical data

Mounting type	Pluggable module

Material data

Fire load	0 MJ
Weight	35.2 g

Environmental requirements

Ambient temperature (operation at U_N)	-25 … 70 °C
Surrounding air temperature (storage)	-40 … +80 °C

Standards and specifications

Standards/specifications	EN 61810-1

Commercial data

Product Group	6 (Interface Electronics)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
PU (SPU)	3 Stück
Packaging type	Box
Country of origin VKOrg Germany	CN
GTIN	4055143531931
Customs tariff number VKOrg Germany	85364900990