


SD

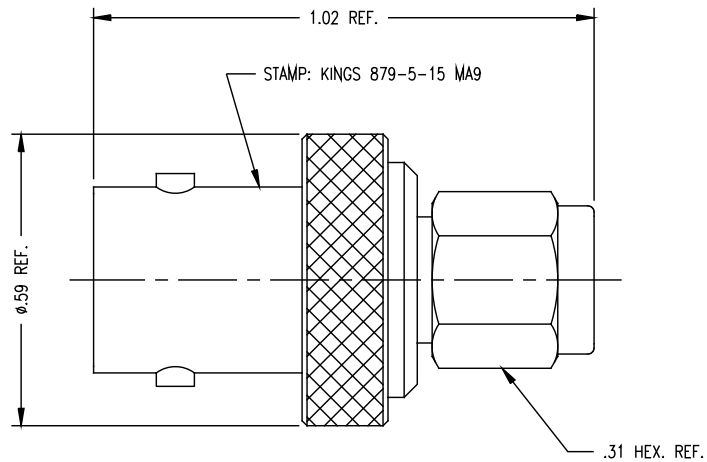

NOTES:

1. INTERFACES PER MIL-STD-348, FIG. 310-1 (SMA) AND 301-2 (BNC).
2. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - CENTER CONTACT } BER. COP., ASTM-B-196
 - SMA BODY }
 - C-RING }
 - BNC BODY: BRASS, ASTM-B16
3. FINISHES:
 - ALL METAL PARTS EXCEPT C-RING: GOLD PLATE PER MIL-G-45204
4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: DC TO 4 GHZ
 - WORKING VOLTAGE: 500 VRMS

879-5-15 MA9

REVISIONS

ISSUE	CHANGES	
	DATE	BY
7	12/05/97	KH

CN 37502 C
REDRAWN
KH 12/05/97

879515SD

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADPT, F-F, BNC TO SMA

DRAWN	JJM	DATE	12/03/70
DESIGN	PW	DATE	01/13/71
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

879-5-15 MA9

SD