


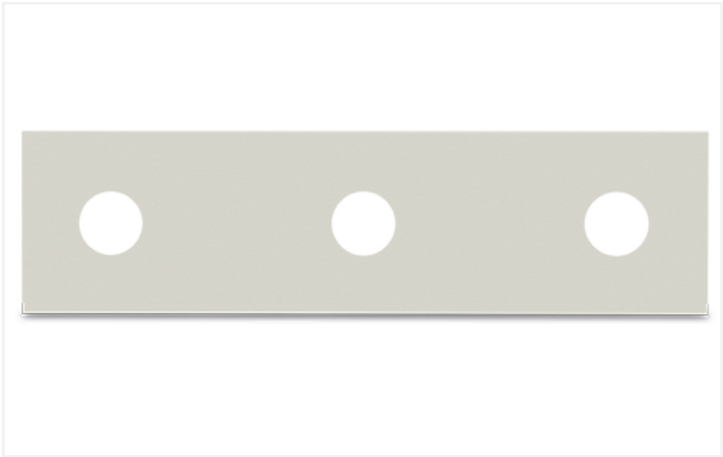

Color: white

Electrical data			
Ratings per IEC/EN		Ratings per UL	
Nominal voltage (III/3)	1000 V	Rated voltage UL (Use Group B)	1000 V
Rated current	353 A	Rated current UL (Use Group B)	360 A
		Rated voltage UL (Use Group C)	1000 V
		Rated current UL (Use Group C)	360 A
		Rated voltage UL (Use Group D)	1000 V
		Rated current UL (Use Group D)	360 A

Ratings per CSA	
Rated voltage CSA (Use Group B)	1000 V
Rated current CSA (Use Group B)	380 A
Rated voltage CSA (Use Group C)	1000 V
Rated current CSA (Use Group C)	380 A
Rated voltage CSA (Use Group D)	1000 V
Rated current CSA (Use Group D)	380 A

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Fire load	0 MJ
Weight	197 g



Commercial data		
PU (SPU)		10 pcs
Packaging type		Bag
Country of origin		DE
GTIN		4055143941945
Customs tariff number		85366990990

Product classification		
UNSPSC		39121421
ETIM 9.0		EC000489
ETIM 8.0		EC000489
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 884-1843

↓

CAD/CAE-Data

CAD data

2D/3D Models 884-1843

↓

CAE data

EPLAN Data Portal 884-1843

↓

ZUKEN Portal 884-1843

↓

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com

Page 2/2

Version 15.05.2025