953236-1 ✔ ACTIVE

MQS


TE Internal #: 953236-1

Vertical, Wire-to-Board, 26 Position, 2 Rows, 2.54mm [.1in] Centerline, Tin (Sn), Printed Circuit Board, 7.5A Contact Current Rating (Max), Signal

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Headers > Signal Header



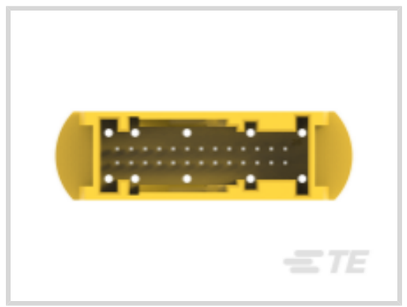



PCB Mount Orientation: **Vertical**

Contact Current Rating (Max): **7.5 A**

Termination Method to PCB: **Through Hole - Solder**

Sealable: **No**

Centerline (Pitch): **2.54 mm [.1 in]**

All Signal Header (237)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	26
Number of Sections	1
PCB Mount Orientation	Vertical
Number of Positions	26
Number of Rows	2

Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Connector & Keying Code	A-E
Primary Product Color	Yellow

Contact Features

Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Type	Tab
Contact Current Rating (Max)	7.5 A
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	With
Mating Retention Type	Locking Interface
PCB Mount Retention	With
Mounting Holes	Without
PCB Mount Retention Type	Boardlock
Mating Alignment	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Connector Width	16 mm[.63 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	20.9 mm[.823 in]
Connector Length	53.8 mm[2.118 in]

Usage Conditions

Operating Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Solder Process	Wave Solder Capable
Shielded	No
Circuit Application	Signal

Packaging Features

Packaging Quantity	384
Packaging Method	Tray

Other

Interface Number	208-15550

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 953237-1
26W MQS HDR HSG W BD YEL



TE Part # 185875-1
26POS MQS REC



TE Part # 185879-2
26W MQS COVER ASSY BLUE



TE Part # 185879-3
26W MQS COVER ASSY RED




TE Part # 1-185879-2
26W MQS COVER ASSY BLUE


Customers Also Bought



TE Part #HD34-24-21PE-072
REC, 21P, AL, E, THD ADPT DRAIN, 12 /16,P

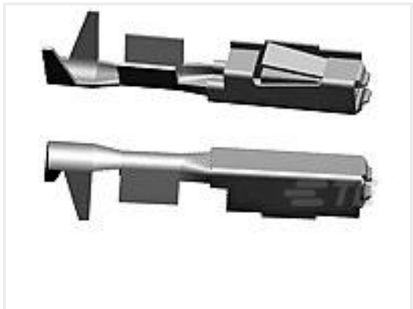


TE Part #5-963715-1
MQS0,63 Sn rec LL unseal. 0,5-0,75

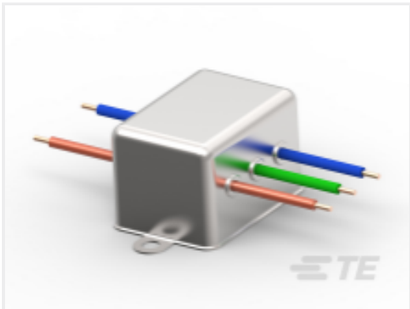


TE Part #6-1609091-7
10FBL3=F8543




TE Part #6-1614884-6
CPF 0805 1K5 0.1% 25PPM 1K RL

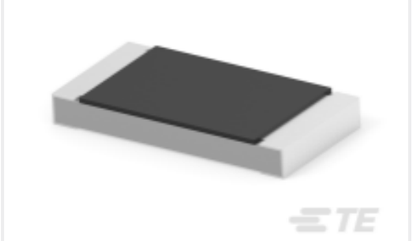


TE Part #2176600-4
RLC73PD 2H R649 1% 1K RL

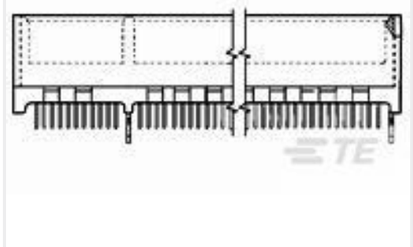

TE Part #1-5145167-2
STANDARD EDGE .050 SERIES 60 DUAL ASSY

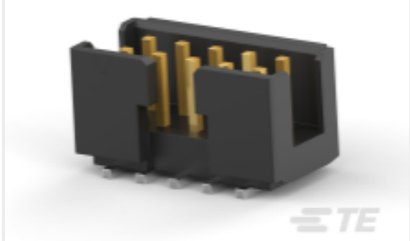

TE Part #1-2373378-0
10P,2MM,SHRD HDR,DRVT,SMD,0.76 AU,TB

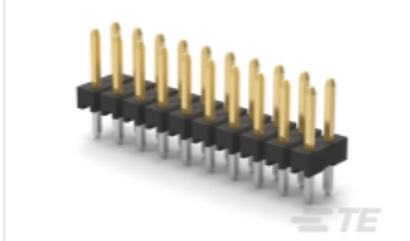

TE Part #2842132-6
12P,2MM,BRK HDR,DRVT,2.8,0.76AU, TB W/CAP



TE Part #185879-3
26W MQS COVER ASSY RED



TE Part #1-936124-2
14POS MQS REC

Documents

Product Drawings

26pos MQS .63 header 180deg

English

CAD Files

Customer View Model

ENG_CVM_953236-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_953236-1_C.3d_stp.zip

English

Customer View Model

ENG_CVM_953236-1_C.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

French