

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C211270	2021/08/13	Ouyang	 X1
C	C220487	2022/04/06	Vicky	 X5
D	C230091	2023/02/02	Ruru	 X1

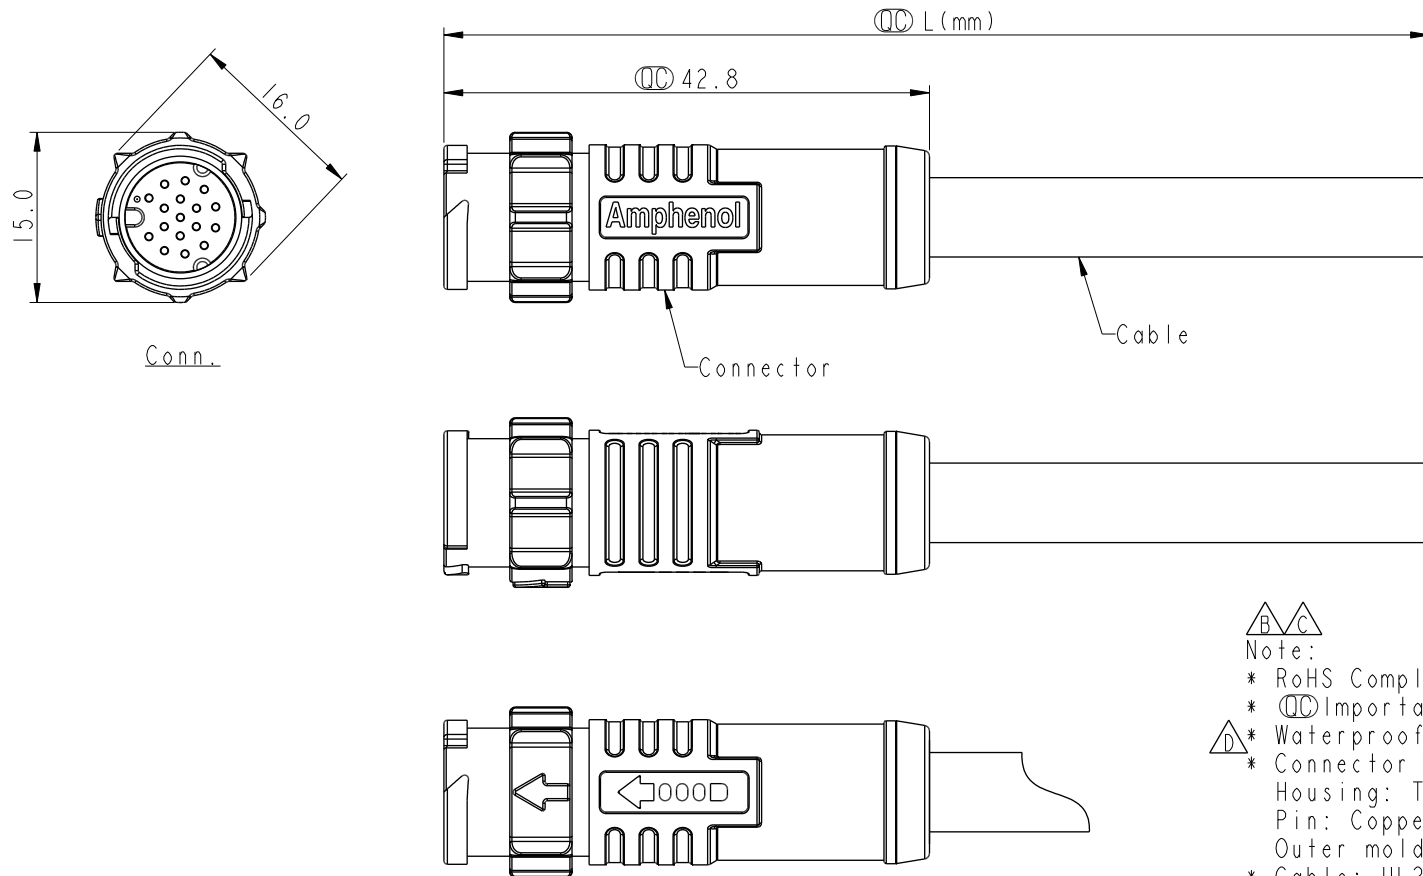


Diagram showing two triangles, B and C, sharing a common vertex and base line.

Note:

* RoHS Compliant

* QC Important dimension

* Waterproof rate: IP68, mated 1m/24h

- * Connector

Housing: Thermoplastic, Black

Pin: Copper alloy, Gold plated

Outer mold: Thermoplastic, Black

* Cable: UL2517, PVC Jacket, Black

* Cable length tolerance: 1M: +50/-0 mm

$$1M < L \leq 3M: +100/-0 \text{ mm}$$
$$3M < L \leq 5M: +150 / -0 \text{ mm}$$
 $5M < L \leq 10M: \pm 100 \text{ mm}$

10M < L ≤ 20M: ±200 mm

$$20M < L \leq 30M: \pm 300 \text{ mm}$$

30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE XLOK, A-1.5A, CABLE W/O SR M, M, MOLDING, PUSH LOCK 		
TOLERANCE ±0.5mm		SCALE 1:1	SIZE A4	SHEET 1 OF 2
		REV. D	WC-REV. .0	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ouyang	2020-11-27
DWG NO	CHECKED BY	DATE
AZ-XXBMMM-QL8CXX	Jerry	2020-11-27
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2020-11-27

A	B	C	D	E	F
---	---	---	---	---	---

A	B	C	D	E	F
---	---	---	---	---	---

A	B	C	D	E	F
---	---	---	---	---	---

A	B	C	D	E	F
---	---	---	---	---	---