
BMRA000606301R5MA1

Aliases (MHCI06030-1R5M-R8)

PULSE, BMRA, Metal Composite, 20%, 1,500 nH

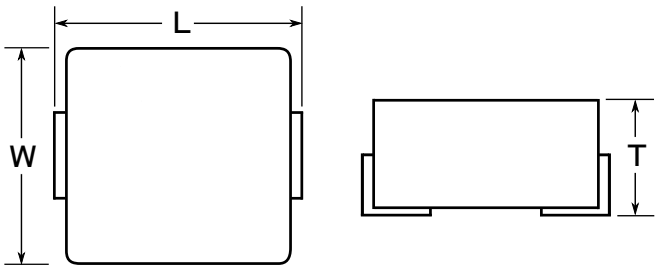

General Information	
Series	BMRA
Style	SMD Molded
Core	Metal Composite
Description	Closed Magnetic Circuit Type-Molding Processing & for Ultra High Current
RoHS	Yes

Dimensions	
L	6.95mm +/-0.35mm
W	6.6mm +/-0.2mm
T	3mm MAX

Packaging Specifications	
Packaging	T&R, 330mm
Packaging Quantity	1000

Specifications	
Inductance	1.5 uH (100 kHz)
Inductance Tolerance	20%
Rated Current	9.5 Amps (Irms)
Saturation Current	18 Amps (Isat)
Temperature Range	-55/+125°C
Shielded	Yes
DC Resistance	15 mOhms
DC Resistance	0.015 Ohms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2026 YAGEO