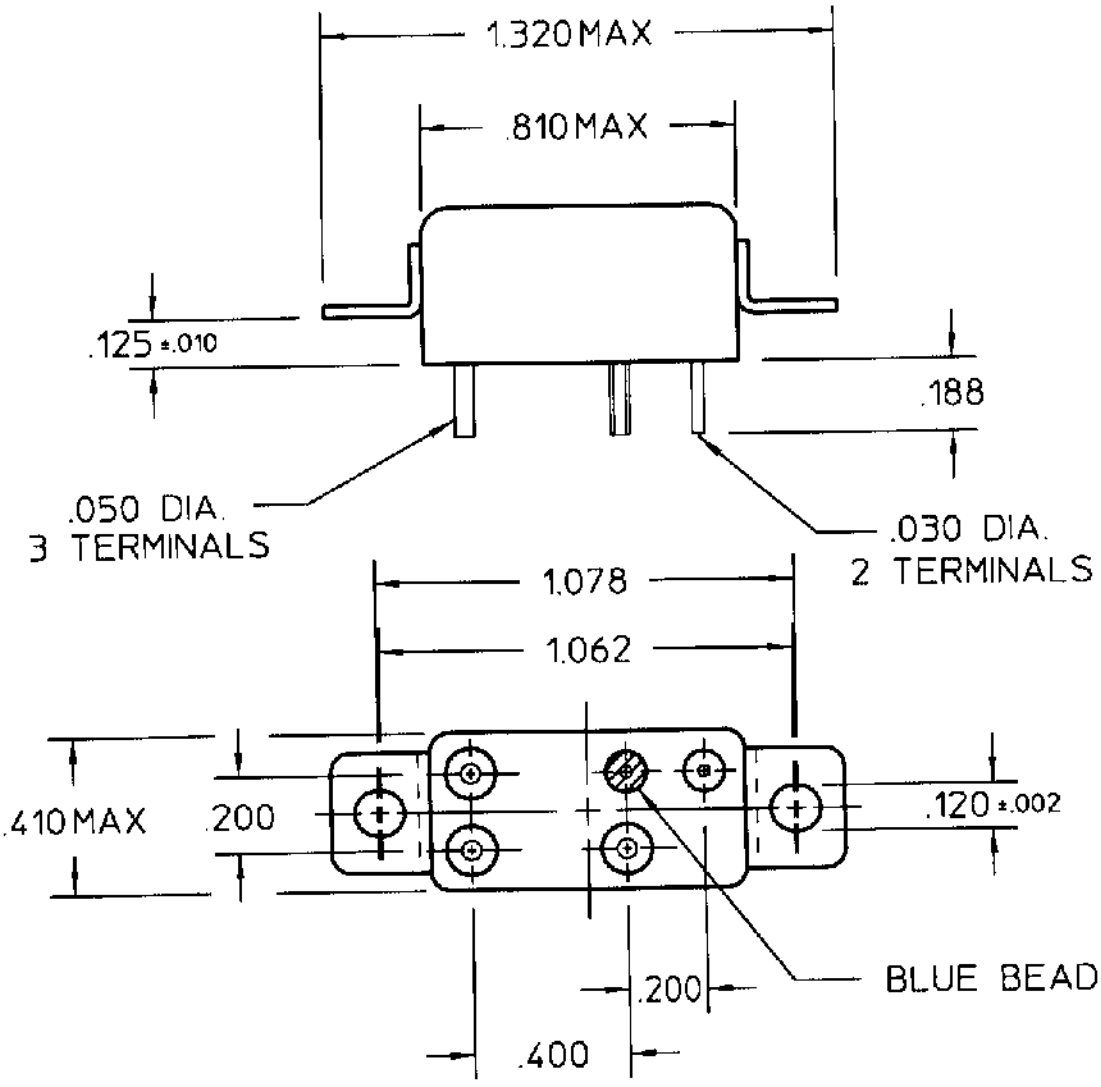


COIL: @ 25°C

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	1.8 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: DIELECTRIC 1000 VRMS EXCEPT 500 VRMS ACROSS OPEN CONTACTS.

CUSTOMER DATA SHEET

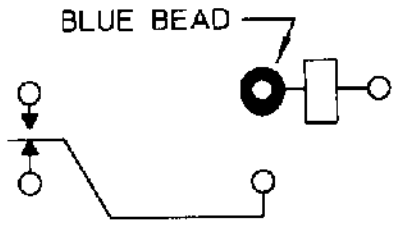

CONTACT RATING: 10 AMP/28 VDC RESISTIVE 50,000 OPERATIONS

DR. R.B. 6/4/98 CK. 6/4/98MR

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.

CUST. NO.

TYPE "CBW" RELAY

CBW-1C-24B

SUPERSEDED
NOT the LATEST
REVISION