


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1741285	2017/04/20	Vicky	Update Logo
C	C231273	2023/10/04	Ruru	△C X2



Sealing Nut




Seals




Clamp Ring △B




Gasket




Connector

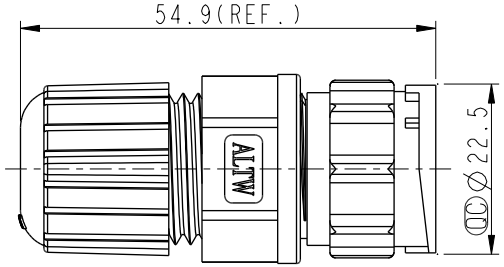



Conn



Pin Assignments
Front View

△C Note:
* QC Important Dimension
* Waterproof Rate: IP67, Mated
* Housing: Thermoplastic, Black
* Male Pin: Copper Alloy, Gold Plated
* Gasket:Rubber, Black
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Rubber, Black
* Seal: Rubber, Black
* Seals For Cable OD: Ø5.5mm~10.8mm
* One set unassembled in one pe bag

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: O CERES, D-5A, 18P, CABLE W/O SR M, M, FI SOLDER, 2LOCK △C

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. C | WC-REV. A.3 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: DD-18BMMA-LL7001	DRAWN BY: Vicky	DATE: 2017-04-20
DWG NO: DD-18BMMA-LL7001	CHECKED BY: Rita	DATE: 2017-04-20
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2017-04-20

W10814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.