



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	3	PAPER CHANGE REF. ECR-18-018446	20DEC2018	AFK	LS


COMMERCIALLY CONFIDENTIAL
RESTRICTED CIRCULATION

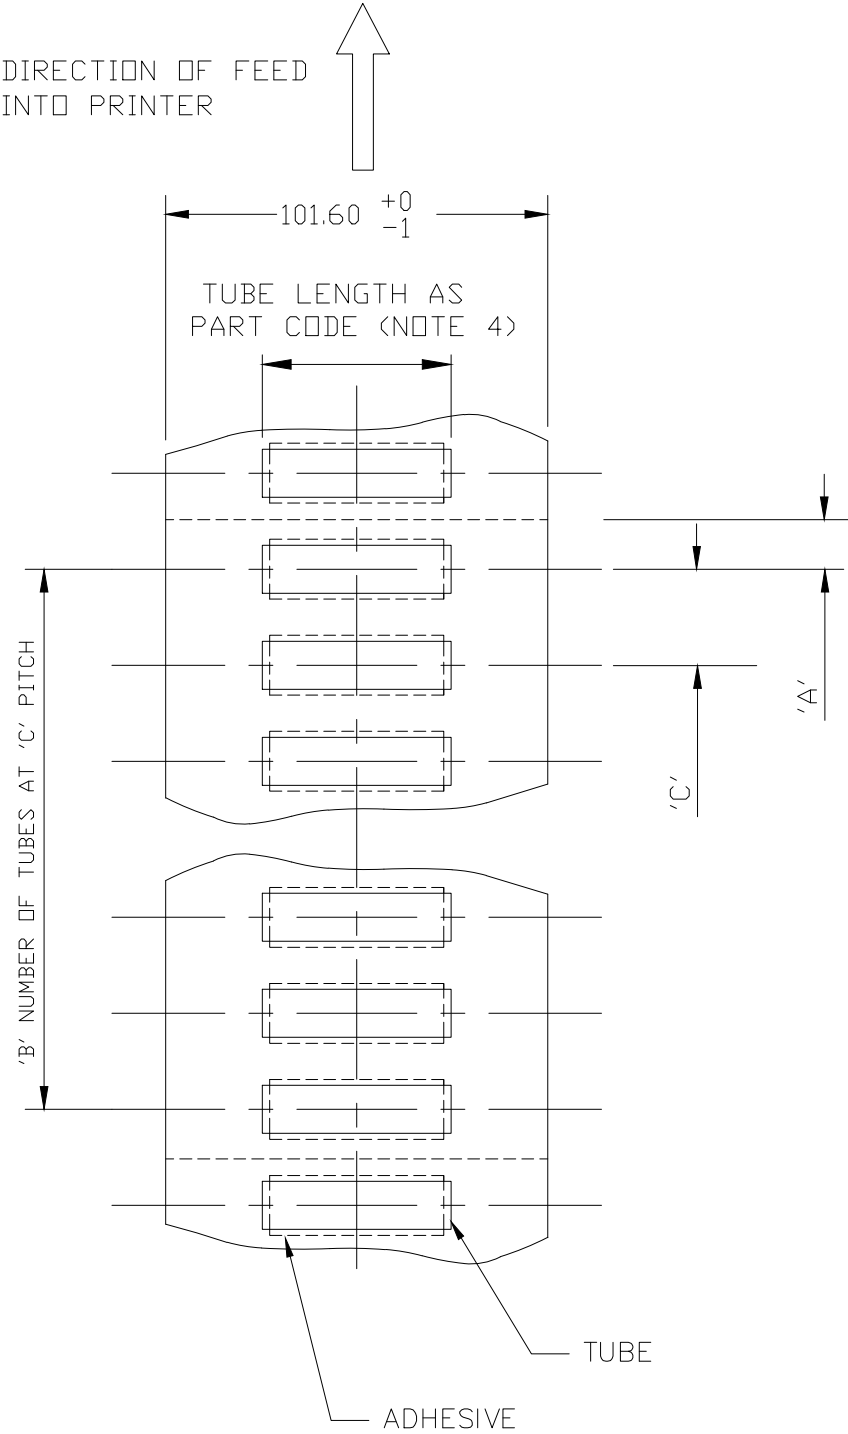

PART CODE (1st FIVE DIGITS)	'A' TOP EDGE OF PAPER TO CENTRE OF TUBE	'B' No. OF TUBES AT 'C' PITCH PER PAGE	'C' TUBE POSITION PITCH
HS024	6.40	20	12.7
HS032	6.40	20	12.7
HS048	6.40	20	12.7
HS064	8.46	15	16.93
HS095	12.7	10	25.4
HS127	12.7	10	25.4
HS190	25.4	5	50.8
HS254	25.4	5	50.8
HS381	63.5	2	127

- NOTES:-
- TOLERANCE ON 'C' - ALL SIZES $\pm 0.5\text{mm}$.
 - EDGES OF TUBE TO BE STRAIGHT/SQUARE TO PAPER
EDGE WITHIN 1.0mm TOLERANCE ZONE. SEE DIAGRAM BELOW.
 - NO ACCUMULATIVE PITCH ERROR THROUGH PACK IS
ACCEPTABLE.
 - TUBE LENGTH CUT TOLERANCE:- $\pm 1_0\text{mm}$.

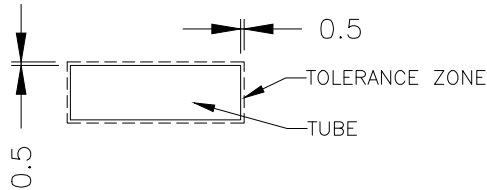

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AFK	27NOV2012		 TE Connectivity			
DIMENSIONS: mm		CHK —	—		NAME HSI THERMAL TRANSFER NARROW ASSEMBLY 2:1 PRE TAPED CARRIER —			
		APVD —	—					
		PRODUCT SPEC —						
		APPLICATION SPEC —						
MATERIAL IRRADIATED POLYOLEFIN TUBE		FINISH —		WEIGHT 0.000000	A3	0198G	C-1905A0019	RESTRICTED TO —
CUSTOMER DRAWING					SCALE — — —	SHEET 1 OF 1		REV 3