EM2423 Series
EuroMag Terminal Blocks

Pluggable Block with Flanges (Mates with EM2211 Series); 3.81 Centers



EM242307


SPECIFICATIONS

Rating: 10A, 300V
Center Spacing: 0.15" (3.81mm)
Wire Range: #16-26 AWG
Housing Material: UL rated 94V0 Thermoplastic
Contact Material: Brass Tin-Plated
Cage Material: Brass, Nickel-Plated
Screw Size: M2.0 Zinc-Plated Steel
Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.
Torque Rating: 3.0 lb-in.
Construction: Mold-to-Length
Agency Information: c UL us File E62622; CE Certified

Poles	L (mm)
2	17.91
3	21.72
4	25.53
5	29.34
6	33.15
7	36.96
8	40.77
9	44.58
10	48.39
11	52.20
12	56.01

To convert to inches, divide by 25.4

Dimensions - mm (in)

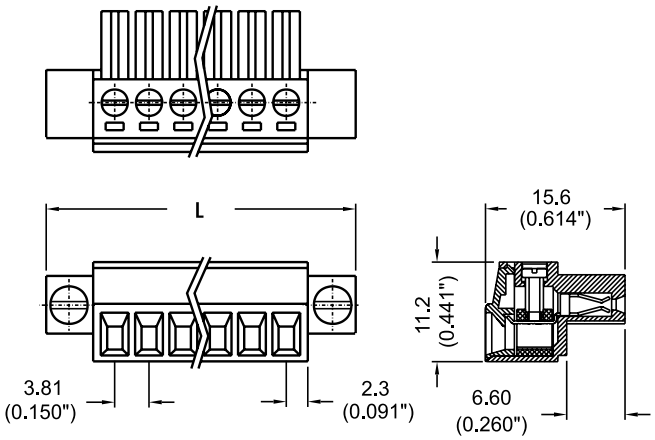

Part Numbering System

Series

EM2423

# of Poles

☐☐

02 to **12**

Mating Header: EM2211 pg. 84