


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN24/17	L.CHAN
B	PROPOSAL	MAR11/19	L.CHAN
C	UPDATING FLAMMABILITY RATING AND ADD NOTE5	MAY28/20	L.CHAN
D	CHANGE CAV NUMBER AND ADD OPERATING TEMPERATURE	JUN08/20	L.CHAN

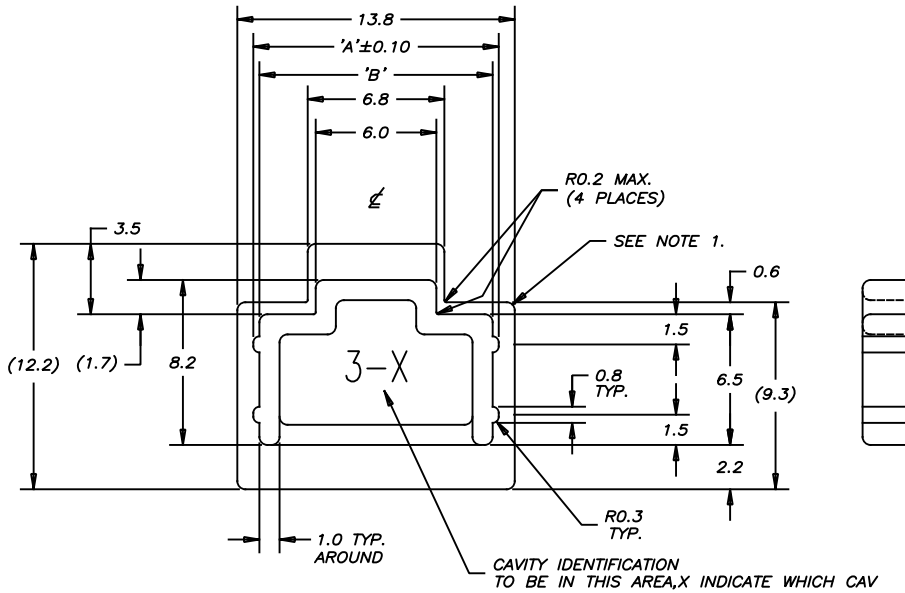




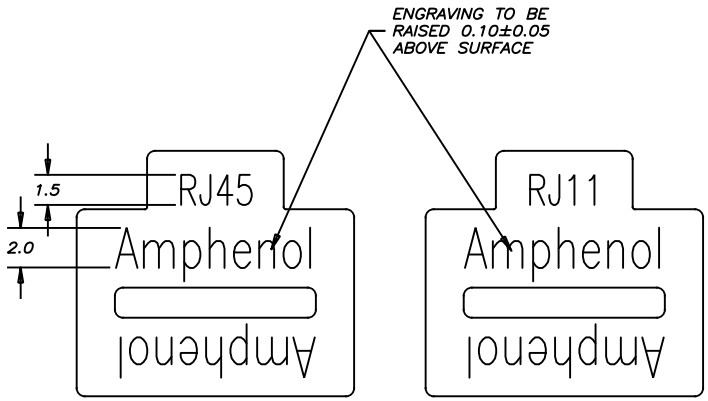

FRJ-3411
& FRJ-3A11
(ENGRAVING VIEW)

FRJ-3611
(ENGRAVING VIEW)

ENGRAVING DETAILS

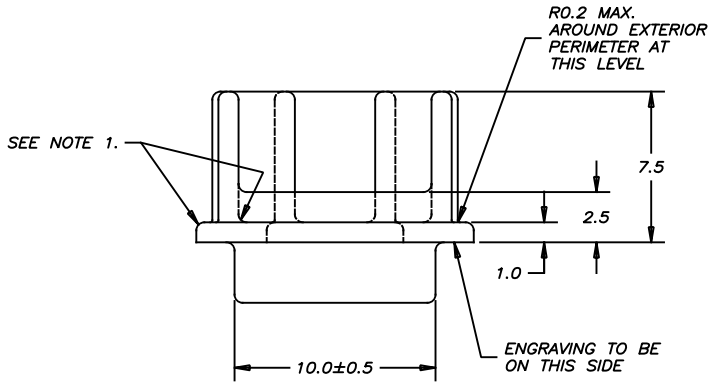

AMPHENOL CANADA CORP
RoHS
COMPLIANT
2011/65/EU RECAST

TABLE:

PART NUMBER	FOR CONNECTOR TYPE	'A'±0.10	'B'	COLOUR
FRJ-3411	RJ45	12.20	11.6	GREY
FRJ-3A11	RJ45	12.20	11.6	BLACK
FRJ-3611	RJ11	10.17	9.6	NATURAL

NOTES:

1. UNLESS SPECIFIED OTHERWISE, FILLETS AND EDGES TO BE SHARP TO 0.4R MAXIMUM.
2. PART TO BE FREE OF FLASH, GATE REMNANT, VOIDS AND DISCOLOURATION.
3. GENERAL TOLERANCE UNLESS INDICATED OTHERWISE: ±0.2.
4. MATERIAL TO HAVE A CONTINUOUS SERVICE, ENGINEERING THERMOPLASTIC FLAMMABILITY RATING UL 94V-1.
5. RoHS AND REACH COMPLIANT.
6. MATERIAL TO HAVE A CONTINUOUS SERVICE USE TEMPERATURE OF -40° TO 70°

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN HANSON.C	JUN24/17	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETERS	CHECKED L.CHAN	JUN24/17	
SECONDARY	M.E. APP'D		TITLE: RJ DUST CAP, UL 94V-1 FLAMMABILITY RATING
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES FOR MM	DWG APP'D		
1 DECIMAL PLACE ±0.20	ENG. REL. NO.		DWG NO. P-FRJ-3X11 REV D
2 DECIMAL PLACE ±0.15	REF.		
3 DECIMAL PLACE ±0.10	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE: C | SCALE: N/A | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			