


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN16/20	L.CHAN
B	UPDATING FLAMMABILITY RATING	JUL08/20	L.CHAN

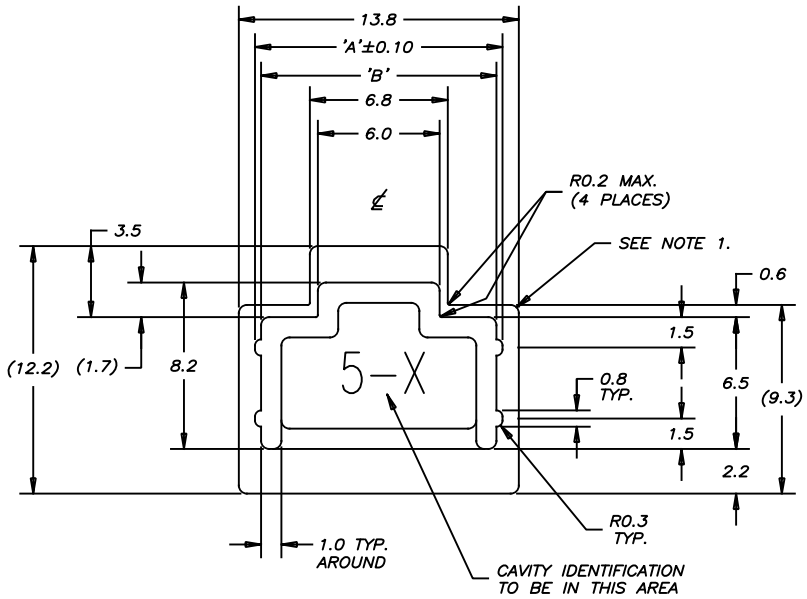




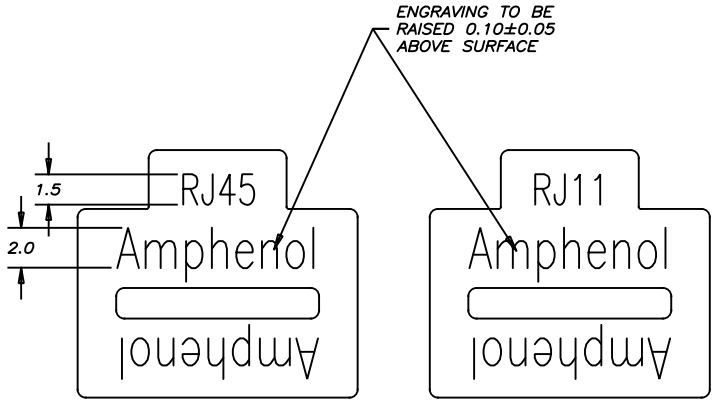

FRJ–5411
& FRJ–5A11
(ENGRAVING VIEW)

FRJ–5611
(ENGRAVING VIEW)

ENGRAVING DETAILS

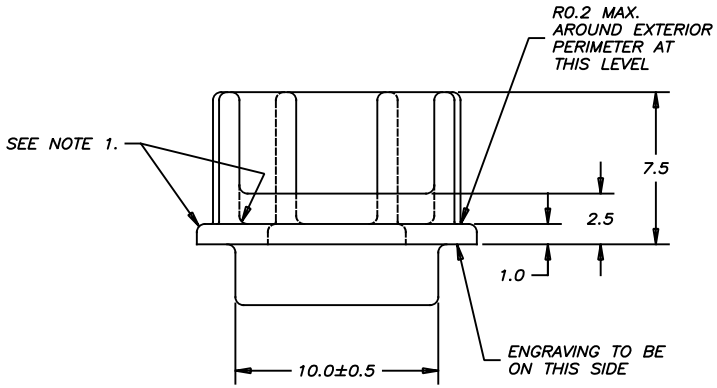

AMPHENOL CANADA CORP
RoHS
COMPLIANT
2011/65/EU RECAST

TABLE:

PART NUMBER	FOR CONNECTOR TYPE	'A'±0.10	'B'	COLOUR
FRJ–5411	RJ45	12.20	11.6	GREY
FRJ–5A11	RJ45	12.20	11.6	BLACK
FRJ–5611	RJ11	10.17	9.6	NATURAL

NOTES:

1. UNLESS SPECIFIED OTHERWISE, FILLETS AND EDGES TO BE SHARP TO 0.4R MAXIMUM.
2. PART TO BE FREE OF FLASH, GATE REMNANT, VOIDS AND DISCOLOURATION.
3. GENERAL TOLERANCE UNLESS INDICATED OTHERWISE: ±0.2.
4. MATERIAL TO HAVE A CONTINUOUS SERVICE, ENGINEERING THERMOPLASTIC FLAMMABILITY RATING UL 94V–0.
5. RoHS AND REACH COMPLIANT.
6. MATERIAL TO HAVE A CONTINUOUS SERVICE USE TEMPERATURE OF –40° TO 85°

UNLESS SPECIFIED OTHERWISE	DRAWN STEVE.X	JUN16/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETERS	CHECKED L.CHAN	JUN16/20	
SECONDARY	M.E. APP'D		TITLE: RJ DUST CAP, UL 94V–0 FLAMMABILITY RATING
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES FOR MM	DWG APP'D		
1 DECIMAL PLACE ±0.20	ENG. REL. NO.		DWG NO. P–FRJ–5X11 REV B
2 DECIMAL PLACE ±0.15	REF.		
3 DECIMAL PLACE ±0.10	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.