

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propietaire.
Propriete de c FCI. Droits de reproduction FCI.

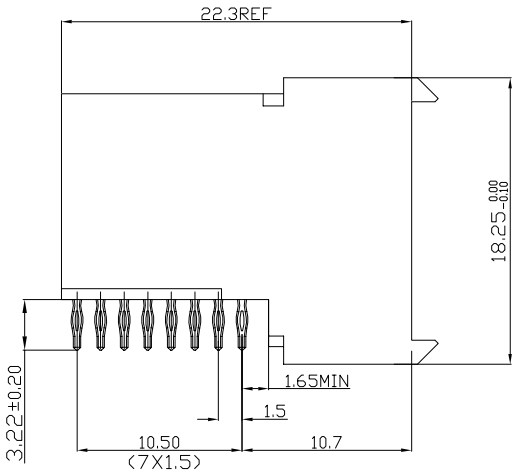

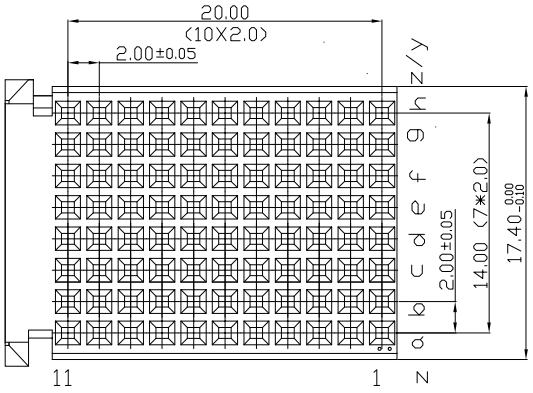

PERFORMANCE CHARACTERISTICS

CURRENT RATING : 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)


OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX


INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10^4 MΩ MIN

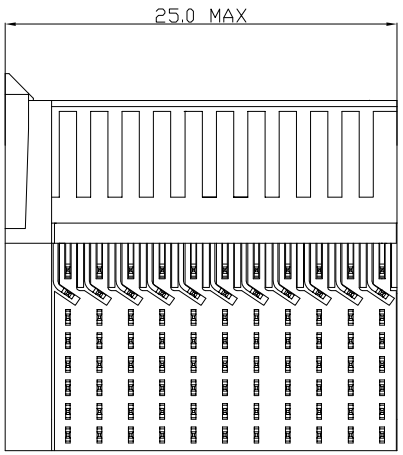

NOTES 1.




2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

RECOMMENDED PCB LAYOUT

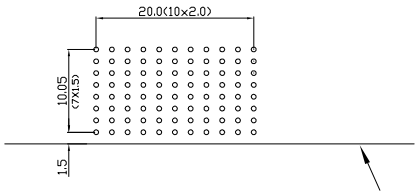

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-09-01
B	DG05-0381	Kason	10-10-05
C	DG07-0362	Kason	05-09-07
D	DG10-0110	NZ	05-30-10

www.fciconnect.com

tolerance: 1DEC ±0.2 1DEC, 2DEC ±0.1 2DEC, ANGLES ±1° HOEKEN

projection | MM

Dr	M.Fret	30-04-96	Product family	MILLIPICS	size A4 / Scale 3/1
Eng			Spec ref		
Chr			Material		ECN
Appr					

title: MPACS 8+2R RA RCP CONN TYPE F W.O SHIELDED

dwg no: BS,C ,202258,005 | Rev. D

catalog no: HM2R83PA8100---- | CUMSTOMER | sheet 1 of 1

All rights strictly reserved.
Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.