




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017-03-15	Frank Deng	Change Rev.01 To Rev.A
B	LEN1770174	2017-07-03	Frank Deng	Change Note



Conn.

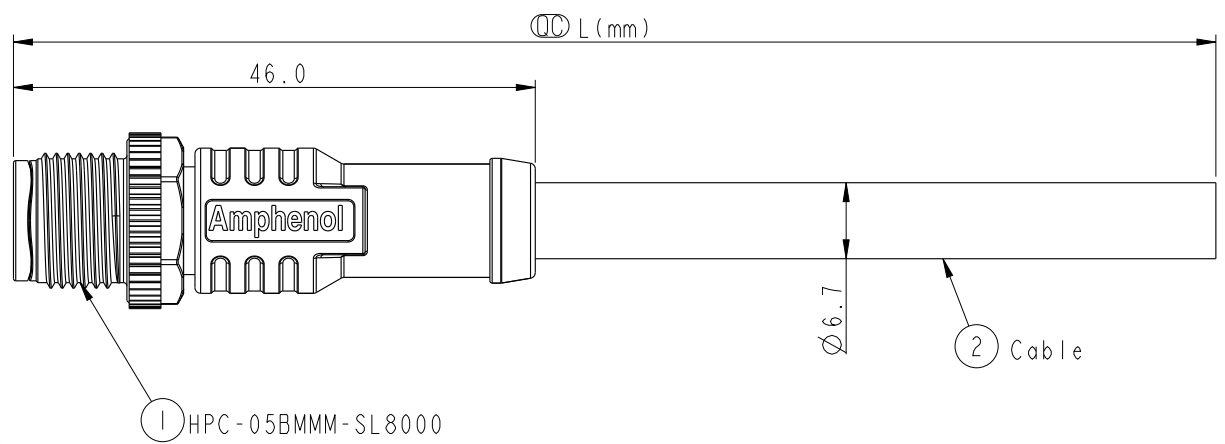


① HPC-05BMMM-SL8000



HPC-05BMMM-SL8AXX
T
XX: 01~99Meters
01: 01Meter
02: 02Meters
:
99: 99Meters
Cable Length(L): 01~99Meters

- △ Note:
- * Ⓞ Important Dimension To Check.
 - * Waterproof Rate: IP68
In 1 meter water within 24 hours
 - * Connector: PU, Black
 - * Nut: Nylon, Black
 - * M Pin: Copper Alloy, Gold Plated 30u"
 - * Outer Mold: PU, Blue
 - * Cable: CL2, (24#*1P+A/M)+(22#*1P+A/M)+
D+B, PVC UV Cable, OD=6.7mm, Black
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Conn.
Pin Assignments
Front View

5	Blue 藍	24#	Twist
4	White 白	24#	
3	Black 黑	22#	Twist
2	Red 紅	22#	
1	Drain 地線	22#	
Conn.	Wire Color		
Pin Out			

UNIT:mm		TITLE
TOLERANCE		NMEA 2000 SINGLE ENDED CABLE MICRO-C, M CONN M PIN, PLASTIC
±0.5mm		SCALE 3:2 SIZE A4 SHEET 1 OF 1
REV. B	WC-REV. A.2	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Frank Deng	2017-07-06
DWG NO	CHECKED BY	DATE
HPC-05BMMM-SL8AXX	Fisher Wang	2017-07-06
CUSTOMER	APPROVED BY	DATE
ALTW	Kevin Hu	2017-07-06