

KU-59-53

REVISIONS

REV	CHANGES
0	ER 4916 18 APR 67 J.G.
1	CN 5595A 10 JAN 68 J.B.
2	CN 14525A GA 2 JUN 75
3	CN 24645C M.A. 17 JUN 83
4	CN 26769 C M.Z.B. 21 JUNE 89

S-D

REF.

FINISH

SPEC. KER-10004

MATL.



SPEC.

UHF PLUG

DRAWN J.G. DATE 18 APR 67
APP. M. DATE 11-1-67

KINGS ELECTRONICS
40 MARLBOROUGH ROAD
TUCKAHOE, N. Y.

KU-59-53

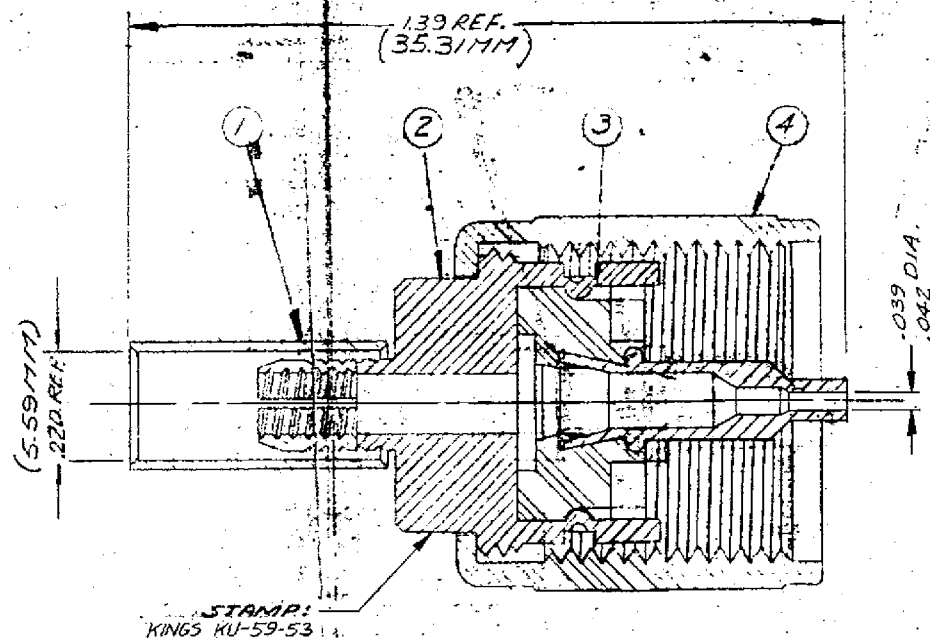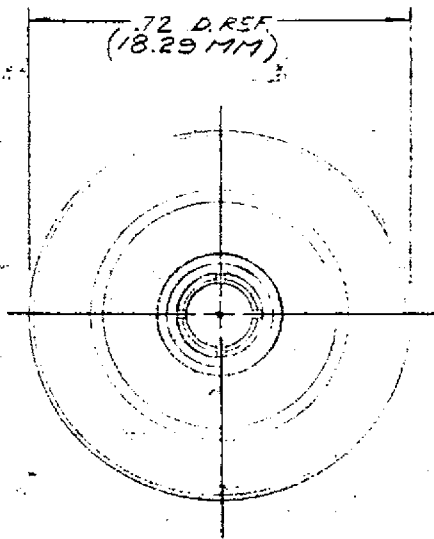

NOTES

1. K-GRIP FOR RG-58/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-69 & KTD-34.
3. FOR CRIMPING USE DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-410.
- 5.
6. SAME AS KU-59-46 EXCEPT FOR FINISH.

S-D

S-D

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES:
FRACTIONS $\pm .010$ DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 20'$
TYPICAL CONCENTRICITY ON ANY 2 DIAMETERS MAY NOT
2. REMOVE ALL BURRS. BREAK SHARP EDGES .003 MAX.
3. NO FILLETS PERMITTED
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED

QTY	DESCRIPTION	REF.
1	CRIMP CONTACT	
1	COUPLING NUT	U-59-02-4-M06
1	INSULATOR ASS'Y	
1	BODY	
1	K-GRIP	N-59-29-2-M06