

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concent, & that no right is granted to disclose or to use any information in this document.

Customer Drawing


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	11/17/17	IP

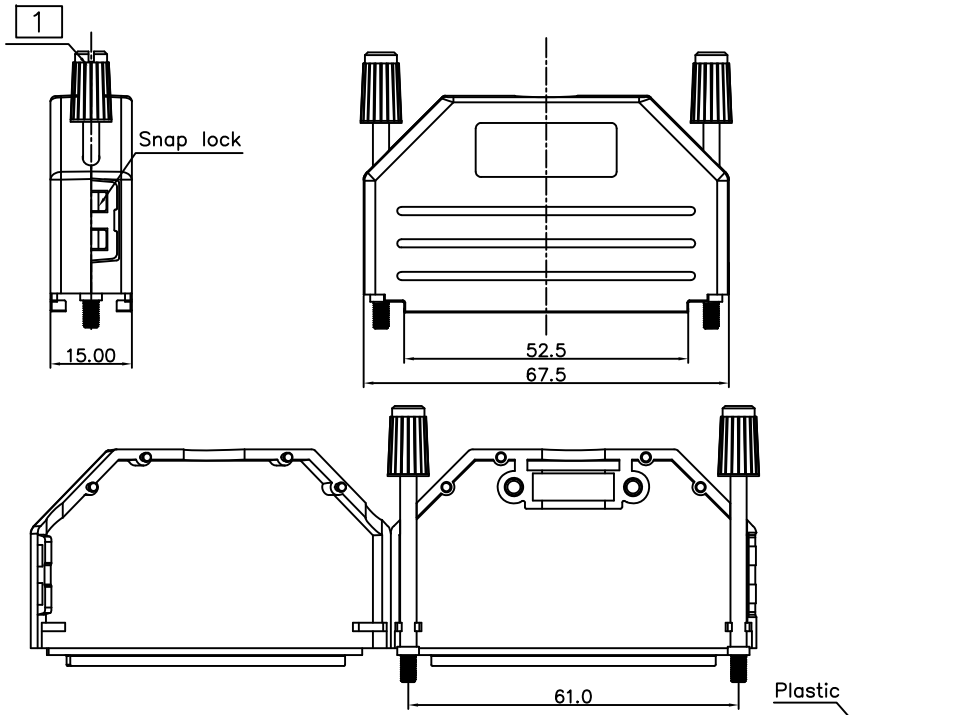

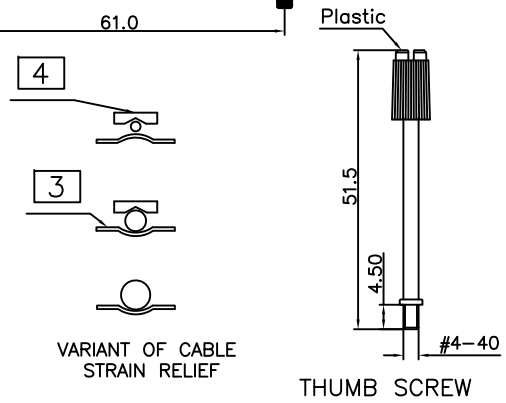

THUMB SCREW

VARIANT OF CABLE STRAIN RELIEF

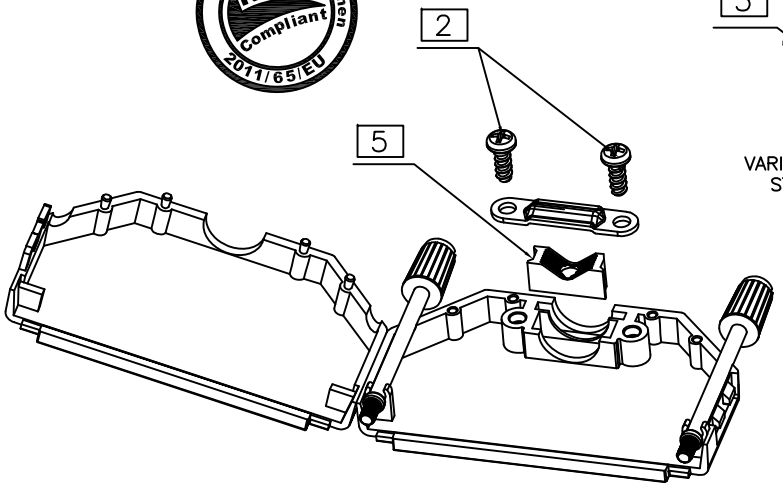

D-SUB TECHNICAL DATA

Material and finish:

Shell: Thermoplastic, UL94-V0,color black

Thumb screws: Steel shaft with plastic knob, blue chromate plated

Screws: Steel, blue chromate plated, Philips head

Strain relief: Steel, blue chromate plated cable clamp with self-tapping screws

Cover: Thermoplastic, UL94-V0, color black

Temperature range: -40°C to +120°C

Attenuation factor: >40 dB between 30 MHz and 1 GHz

Cable gauge: accepts cable diameter up to 11.5mm

PRODUCT CODE

L 17DPPK 50 JS

- L — RoHS Compliance
- 17DPPK — Series: 17DPPK
- 50 — Position: 50
- JS

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		5°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES / METRIC MM

	APPROVAL	DATE
DRAWN	Felix.Liu	11/17/17
CHECKED	Tony.Tang	11/17/17
CHECKED		

DRAWING FILE : Drawing\Dsub\L17DPPK50JS-1

ANGLE OF PROJECTION

Amphenol

TITLE: 50Way Hood, DPPK Series

SIZE	DRAWING NO.	REV.
A4	L17DPPK50JS	1

SCALE NONE SHEET 1 OF 1