



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210024	2021/01/12	Vicky	 X1
D	C210235	2021/03/24	Ruru	 X2
E	C222001	2022/12/29	Ruru	 X1

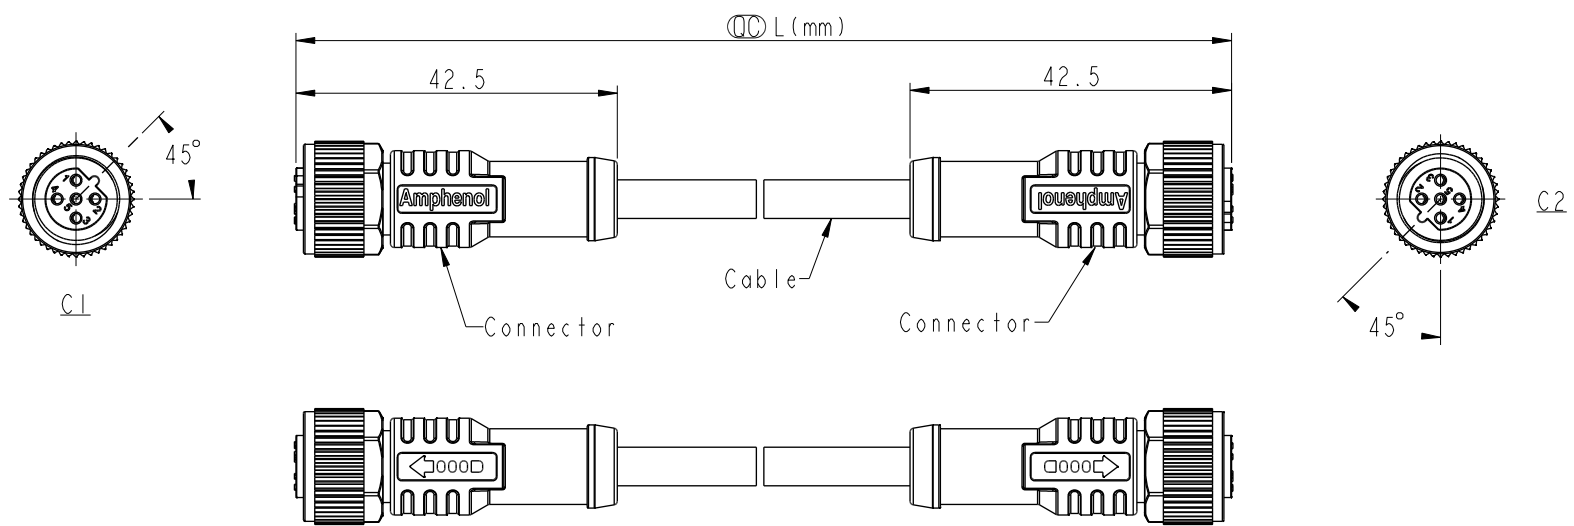

Pin Out	Wire	Wire
5	Gary	灰
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

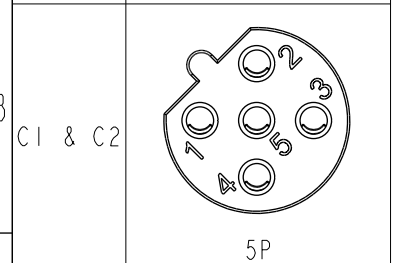

Pin Assignments Front View

 MI2BXXFL-12BFL-SDXXX
XX: No. Of Pin
XXX: 0.5~99Meters
A05: 0.5 Meter
001: 1 Meter
002: 2 Meters
...
099: 99 Meters

- Note:   
- * RoHS Compliant
 - *  Important dimension
 -  * Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2517, 22#*5C, OD=5.1mm, PVC Jacket, Black
 - * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT : mm			TITLE							
			ACC, SEN, B Code, DB-ENDED FF							
TOLERANCE			SCALE	1 : 2	SIZE	A4	SHEET	1	OF	1
$\pm 0.5 \text{ mm}$			REV.	E	WC-REV.		QC : Inspection item			

ITEM NO		DRAWN BY	DATE
DWG NO		Vicky	2018-12-07
 MI2BXXFL-12BFL-SDXXX		CHECKED BY	DATE
CUSTOMER		Rita	2018-12-07
ALTW		APPROVED BY	DATE
		Max	2018-12-07

Amphenol LTW
安費諾亮泰企業股份有限公司