



MSDXXXXX

REV	ECN	DESCRIPTION	DATE	MODIFIED
A		FIRST-RELEASE	2018.05.20	T.H

Amphenol PCDSZ
ORIGINAL
PDF Format
R&D

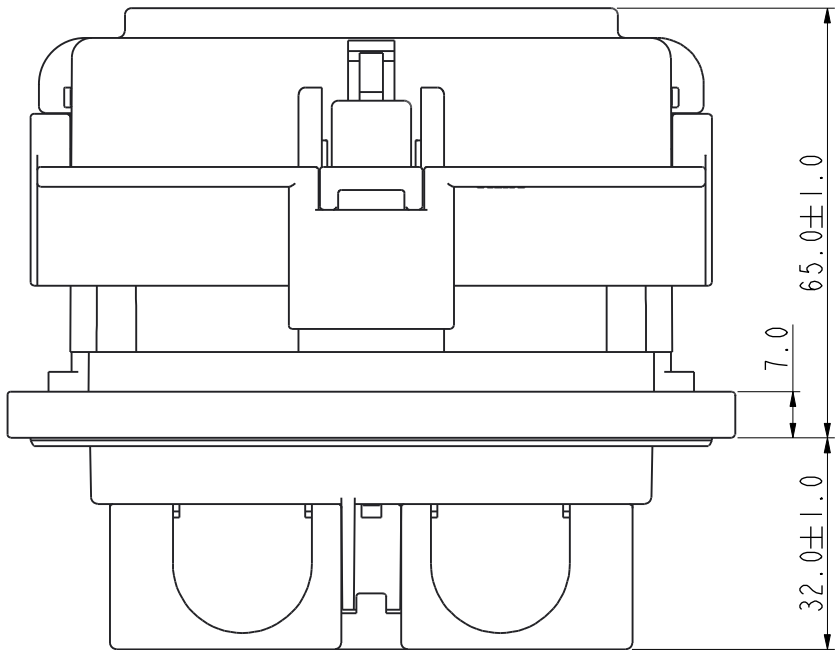

MSD FRONT MOUNTING

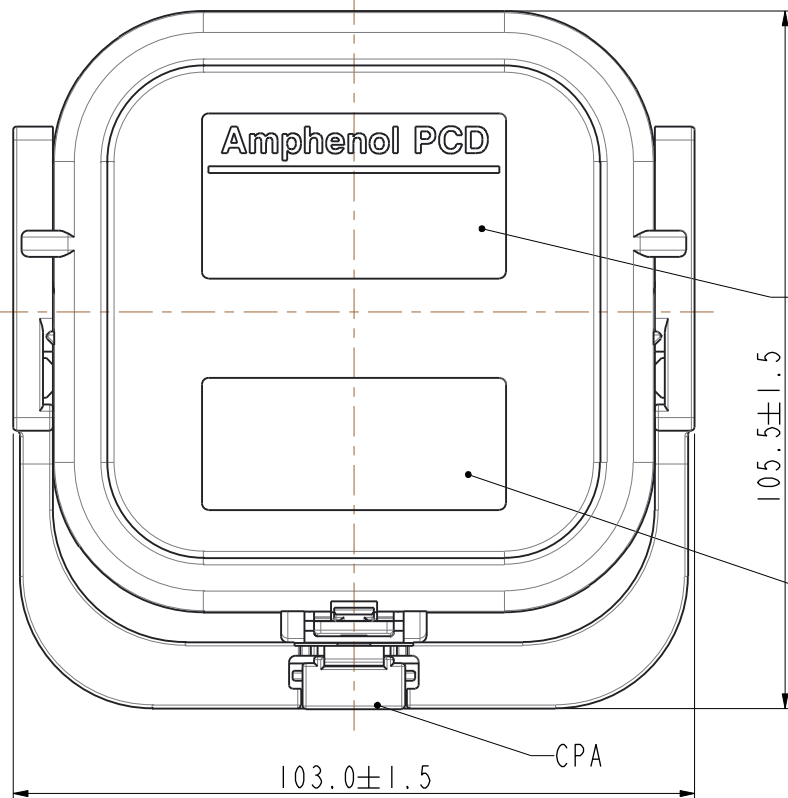

LASER PRINTING AREA
FOR DETAILS, SEE 1,2,3,4
激光印字内容, 详见 1,2,3,4

WARNING LABEL AREA
警示标签区域

●备注 印字的电流根据所选熔断器而定
NOTE: PRINT CURRENT
BASE ON THE FUSE

1. WITHOUT FUSE不带熔断器

TYPE: MSD-SHUNT
RATED VOLTAGE AND CURRENT:
DC 750V 200A
T/N: XXXXXXXX

●第三页类别1印字内容Category 1 Print Content

2. WITHOUT FUSE不带熔断器

TYPE: MSD-SHUNT
RATED VOLTAGE AND CURRENT:
DC 1000V 260A
T/N: XXXXXXXX

●第三页类别2印字内容Category 2 Print Content

3. WITH OLD FUSE带老款熔断器


TYPE: MSD-XXXX
RATED VOLTAGE AND CURRENT:
AC 690V XXXA
T/N: XXXXXXXX

●第三页类别3,4印字内容Categ.3,4 Print Content


4. WITH FUSE带熔断器

MSDVMXXX
RATED VOLTAGE AND CURRENT:
DC 800V XXXA
T/N: XXXXXXXX


●第三页类别5印字内容Category 5 Print Content

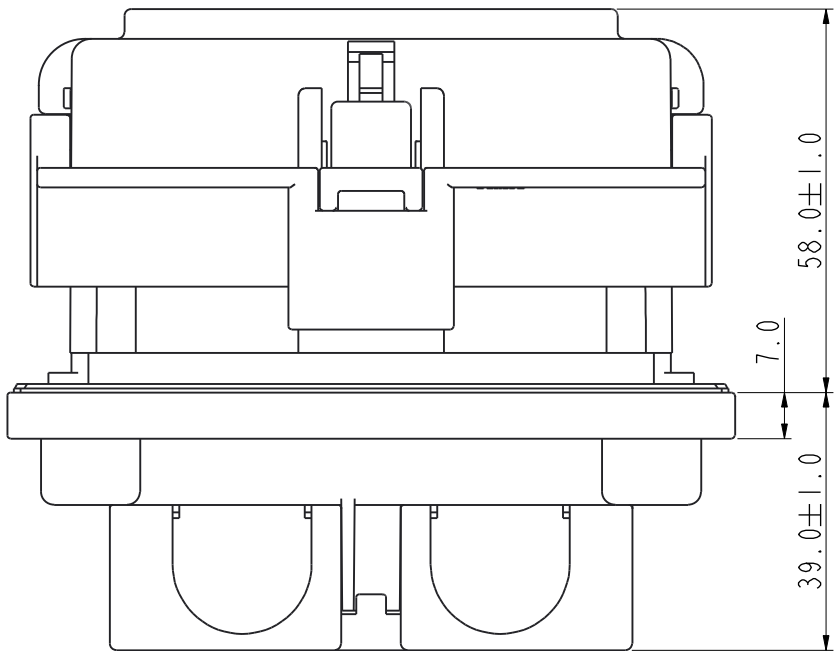

MSD REAR MOUNTING

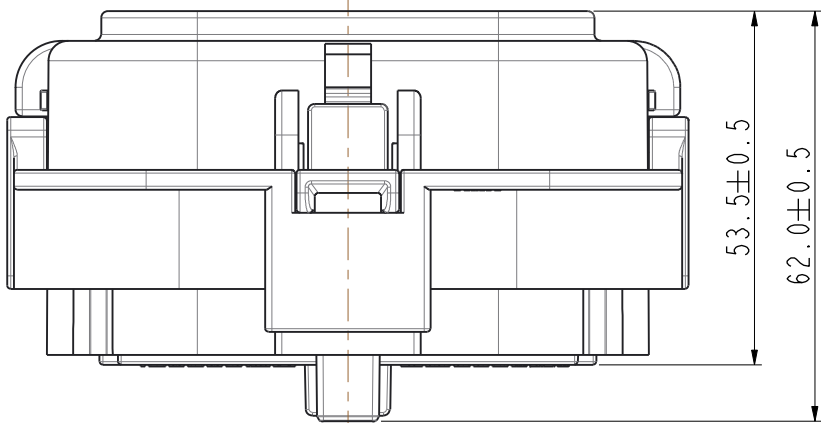

MSD PLUG

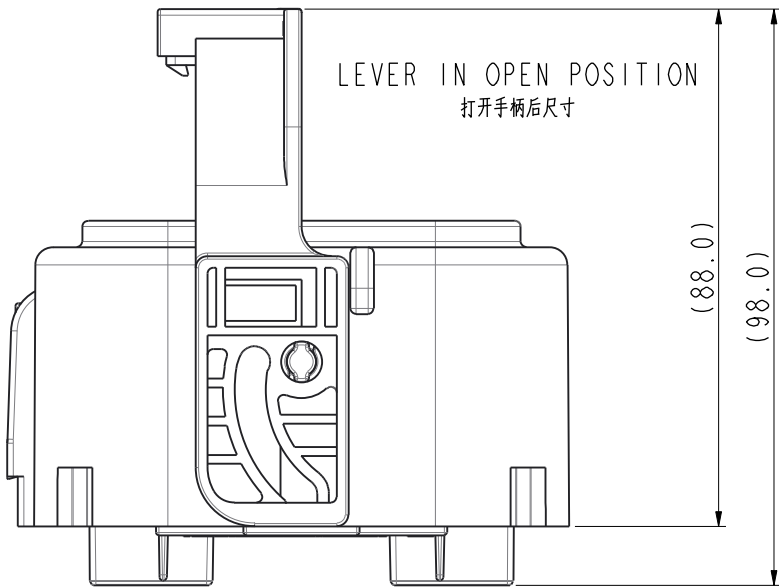

DIMENSIONS		TOLERANCES		PROJECTION		TITLE					
ANSI Y14.5M		.X ±0.5				MSD ASSEMBLY					
UNITS: MM		.XX ±0.05									
Pro/E FILE		ANGLES ±1.0°									
						Amphenol Pcd Shenzhen					
						ENGR TOMMY.H 2018.05.20					
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN		CHKD		SIZE		DWG NO.		REV	
				APPD 		A3		C-MSDXXXXX		A	
						CODE: 58982		SCALE:		SHEET 1 OF 3	

MSDXXXXX

MSDXXXXX: PRODUCT P/N
XXXXXXXX: PRODUCTION DATE

M8X1.25
SEE NOTE 1

9.0

GASKET

PROTECTIVE COVER
CAN BE DISASSEMBLED

HVIL, SHIPPING IN LOOSE
SEE NOTE 2

4- $\varnothing 7.0 \pm 0.2$


86.0 ± 0.3
 84.8 ± 0.3

$R20.5 \pm 0.1$

比例 1:2

FRONT MOUNTING INTERFACE SPECIFICATION
前安装板面参考安装尺寸

4- $\varnothing 6.8$

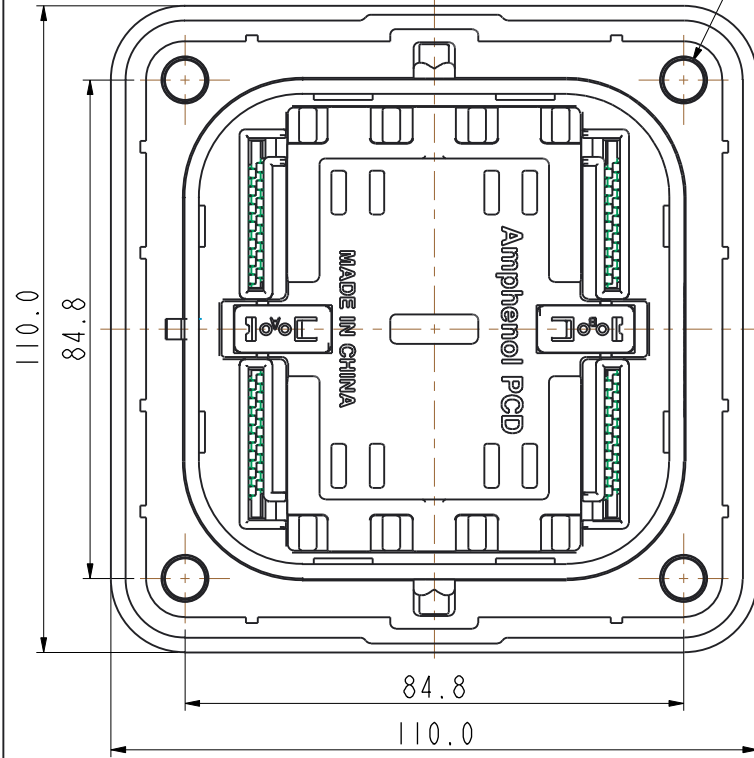

97.0 $\pm$ 1.0

MSDXXXXX
XXXXXXXX

SECTION A-A

MSDXXXXX: PRODUCT P/N
XXXXXXXX: PRODUCTION DATE

12.0
NUT DEPTH

M8X1.25
SEE NOTE 1

9.0 $\pm$ 0.3


GASKET

50.0 7.0 33.5 $\pm$ 1.0

SECTION B-B


MSD RECEPTACLE

4- M6X1.0
SEE NOTE 1

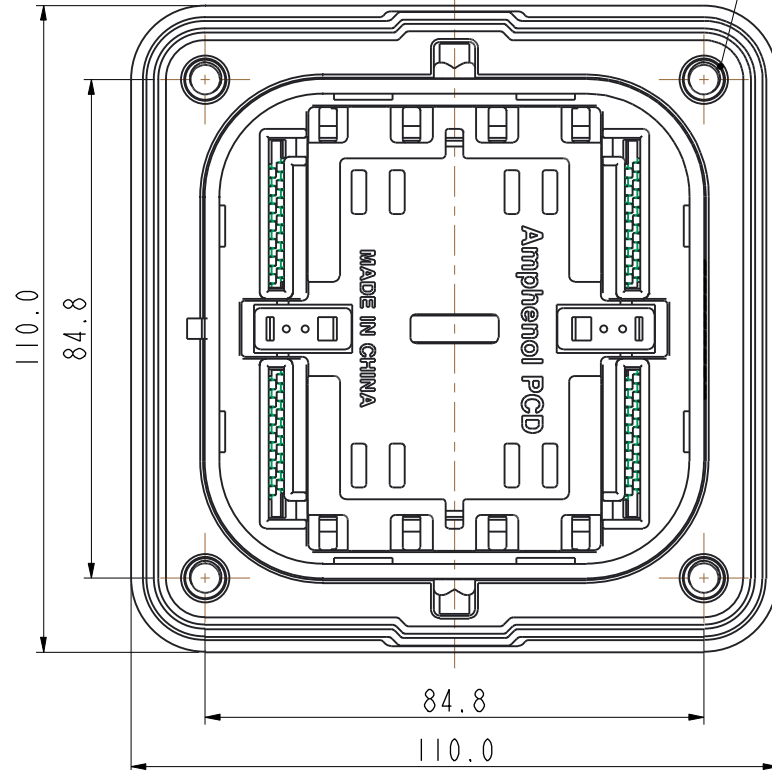


97.0 $\pm$ 1.0

MSDXXXXX
XXXXXXXX

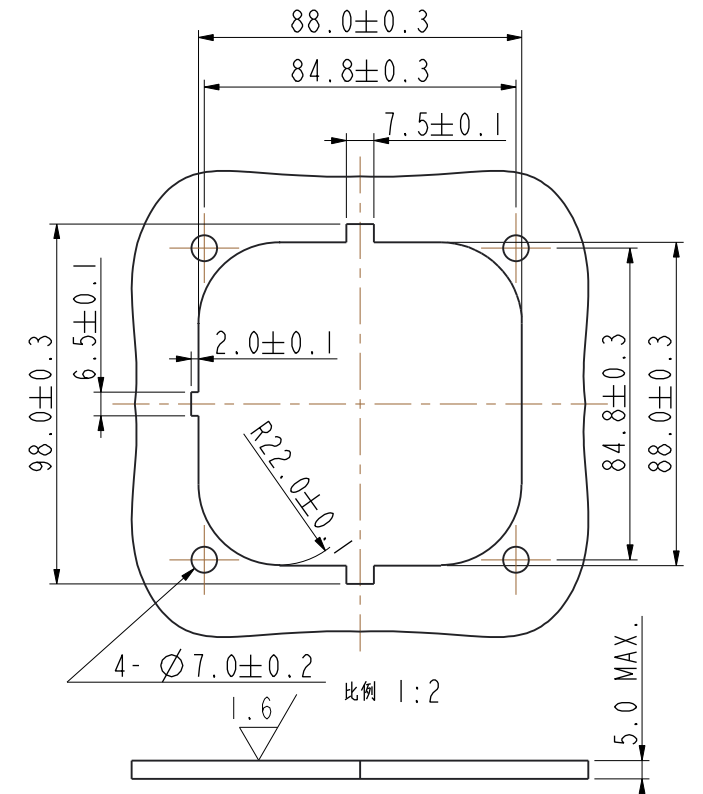

REAR MOUNTING INTERFACE SPECIFICATION
后安装板面参考安装尺寸

SIZE A3	DWG NO. C- MSDXXXXX	REV A
CODE: 58982	SCALE:	SHEET 2 OF 3

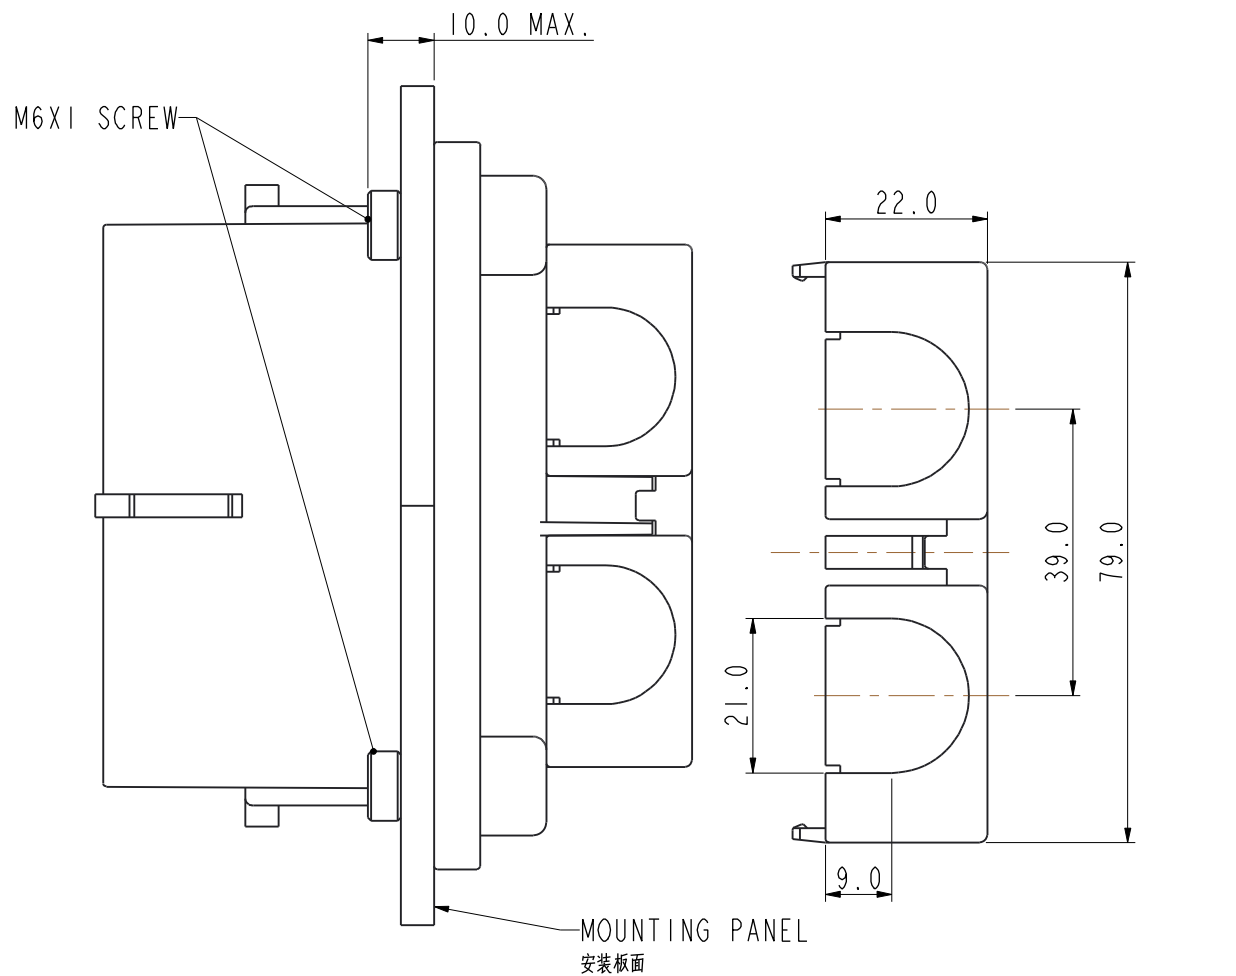REAR MOUNTING SCREW SPECIFICATION
后安装 螺钉尺寸规格PROTECTIVE REAR COVER FOR BUSBAR
铜排保护盖

NOTES:

- 1.THREADED STUD TORQUE LIMITS接线端子锁紧力矩: M6: 6N.m, M8:13.4N.m.
- 2.HVIL CONNECTOR信号连接器型号: MSD-HVIL-2S(散装出货, 另有说明除外)
- 3.MOUNTING SURFACE THICKNESS: MAX 5mm 法兰安装板厚度 最大5mm
- 4.SHELL MATERIAL: PA66+GF, UL94V0.
- 5.INNER HOUSING MAY BE ASSEMBLED ROTATED 180° FROM AS SHOW
内部插芯有可能与图纸中的方向相差180°
- 6.MAX. TERMINAL WITH WIRE 95MM² IF ADDED PROTECTIVE REAR COVER.
MAX. TERMINAL WITH WIRE 120MM² IF WITHOUT PROTECTIVE REAR COVER.
- 7.Humidity相对湿度40%~70% (AT 23±5°C)

TECHNICAL DATA		FEATURE
RATED VOLTAGE(NO FUSE)	1000V DC	★
RATED VOLTAGE(WITH FUSE)	800V DC.MAX.	★
OPERATING TEMPERATURE	-40°C~+125°C	
AMBIENT TEMPERATURE	-40°C~+70°C	
DIELECTRIC WITHSTANDING VOLTAGE	3000V AC	★
INSULATION RESISTANCE	100MΩ .MIN.	★
DURABILITY	50 CYCLES	◎
WATERPROOF(MATED CONDITION)	IP67, IP6K9K	★

★:Critical Feature

◎:Important Feature

1.PLUG PART NUMBER 插头型号:

CATEGORY 类别	FUSE MFG. 熔断器生产商	DESCRIPTION 描述	ORDER P/N 订单型号	FUSE SPEC. 熔断器规格	MARKING 对应插头印字	RATED VOLTAGE 额定电压	MATED TYPE 对配连接器型号	REMARK 备注
1	N/A	PLUG, SHUNT 插头, 短接版	MSDM000	N/A	SHUNT 200A	750V DC	MSDF000F MSDF000R	
2	N/A	PLUG, SHUNT 插头, 短接升级电流版	MSDVM000	N/A	SHUNT 260A	1000V DC	MSDVIF000F MSDVIF000R	
3	Ferraz 法雷	PLUG插头	MSDM2001	200A	200A	690V AC, 600V DC	ALL	THE FUSE IS PROVIDED BY CUSTOMER 客供熔断器
			MSDM2501	250A	250A			
			MSDM3151	315A	315A			
			MSDM3501	350A	350A			
			MSDM4001	400A	400A			
			MSDM4501	450A	450A			
			MSDM5001	500A	500A	690V AC, 500V DC		
			MSDM5501	550A	550A	690V AC, 500V DC		
4	BUSSMANN 巴斯曼	PLUG插头	MSDM2002	200A	200A	690V AC, 600V DC	ALL	
			MSDM2502	250A	250A			
			MSDM3152	315A	315A			
			MSDM3502	350A	350A			
			MSDM4002	400A	400A			
			MSDM4502	450A	450A			
			MSDM5002	500A	500A	690V AC, 500V DC		
			MSDM5502	550A	550A	690V AC, 500V DC		
5	BUSSMANN 巴斯曼	PLUG, VOLTAGE UPGRADE 插头, 电压升级版	MSDVM200	200A	200A	800V DC	ALL	
			MSDVM250	250A	250A			
			MSDVM315	315A	315A			
			MSDVM350	350A	350A			
			MSDVM400	400A	400A			
			MSDVM450	450A	450A			
			MSDVM500	500A	500A			
			MSDVM550	550A	550A			
			MSDVM630	630A	630A			

2.SOCKET PART NUMBER 插座型号:

ITEM 序列	DESCRIPTION 描述	ORDER P/N 订单型号	RATED CURRENT 额定电流
1	SOCKET, FRONT MOUNTED前安装插座	MSDF000F	200A
2	SOCKET, REAR MOUNTED后安装插座	MSDF000R	200A
3	SOCKET, FRONT MOUNTED前安装插座升级电流版	MSDVIF000F	260A
4	SOCKET, REAR MOUNTED后安装插座升级电流版	MSDVIF000R	260A

SIZE A3	DWG NO. C- MSDXXXXX	REV A
CODE: 58982	SCALE:	SHEET 3 OF 3