REV.	DESCRIPTION
A	Initial Release
B	Delete Code Description

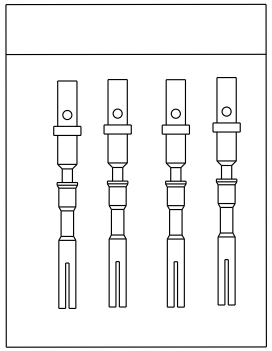

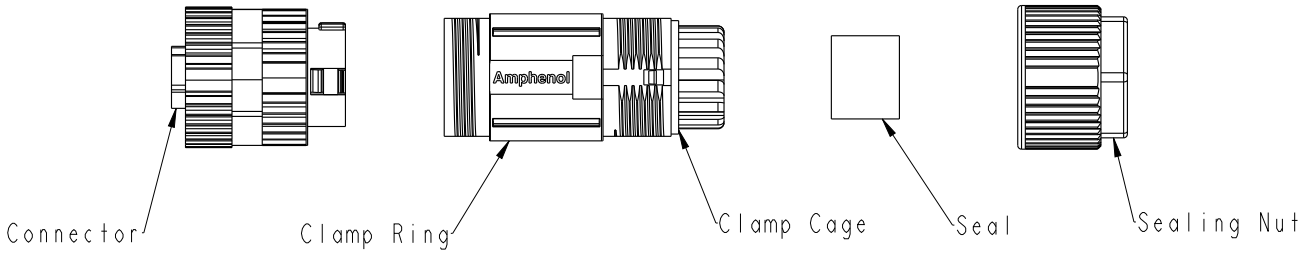



Pin Assignments
Front View

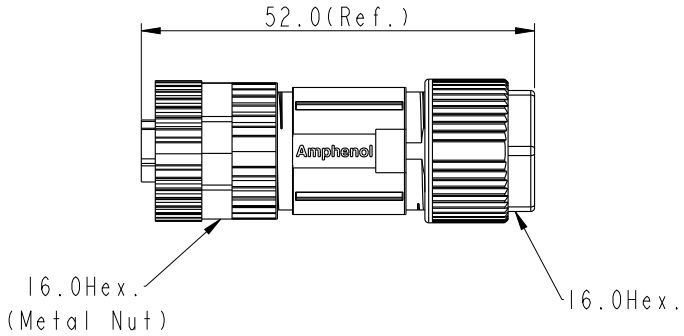

Note:
* IP: IP67.
* Housing: Thermoplastic, Black.
* Female Pin:Copper Alloy, Gold Plated.
* O-Ring: Silicone, Grey.
* Clamp Ring: Zinc Alloy, Nickel Plated.
* Sealing Nut: Zinc Alloy, Nickel Plated.
* Seal For Cable OD:∅4.0mm~∅7.5mm
* Applicable Wire gauge (Stranded wire cross section) 20AWG ~ 24AWG
* Mating Recommended tightening torque: 3~4 kgf.cm / 0.29~0.39 N.m
* Sealing-Nut Recommended tightening torque: 4~6 kgf.cm / 0.39~0.59 N.m
* Detailed applicable wire specifications may vary depending on the actual wire construction.

UNIT:mm	TITLE: M12 D-Code Shielded Assy 4PIN F Conn. F Pin		ITEM NO: MSDS-04BFFC-SL7001	DRAWN BY: Xiaofeng	DATE: 2019/08/09
TOLERANCE: ±0.5mm	SCALE: Free / SIZE: A4 / SHEET 1 OF 1	Amphenol LTW 安費諾亮泰企業股份有限公司	DWG NO: MSDS-04BFFC-SL7001	CHECKED BY: Li-Feng	DATE: 2019/08/09
	REV.: B / WC-REV.: .0 / QC: Inspection item		CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2019/08/09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.