

Panel Potentiometer

Model P09x Series



Features:

- 9 mm rotary
- Multi-ganged
- 100,000 cycle life
- Metal shaft / bushing
- Switch / push-lock option
- Concentric shaft option
- Center tap option



Model Styles Available

Side Adjust, PCB pins, up to 8 gangs	P09xN
Side Adjust, PCB pins, up to 8 gangs, with Switch	P09xS
Top Adjust, PCB pins, up to 2 gangs	P09x5N
Side Adjust, PCB pins, with Push-Lock, up to 2 gangs	P09xP
PCB pins, with Concentric Shaft	P09xC
PCB pins, with Center Tap	P09xT

Electrical

Resistance Range, Ohms	1K-500K
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	Taper B: 0.05W Other Tapers: .025W
Dielectric Strength	300Vac, 1 minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Gang Error (Multi-ganged)	-40dB – 0dB, ±3dB
Switch Contact Resistance	< 100 milliohms
Switch Power Rated	3.0A at 16Vdc

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	50 oz-in
Rotational Torque	0.5 to 1.25 oz-in
Switch Rotational Angle, Maximum	50°

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc


TT Electronics | BI Technologies
413 Rood RD, Suite 7
Calexico, CA 92231
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Issue B 04/2019 Page 1




Environmental

Operating Temperature Range	-40°C to +85°C
Rotational Life	100,000 cycles




Ordering

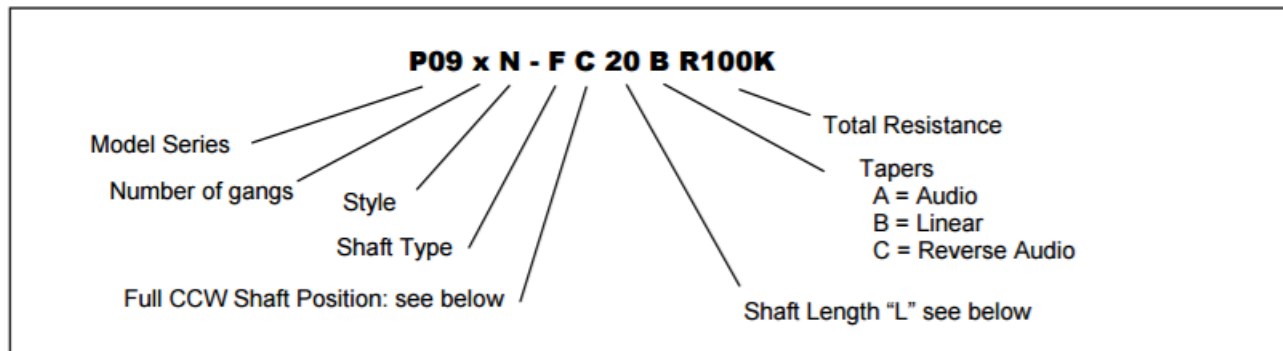

Shaft Types (P09xN, P09xS, P09x5N)

E-TYPE						F-TYPE						Q-TYPE					
																	
L	10	15	20	25	30	L	10	15	20	25	30	L	10	15	20	25	30
T						T	4	7	12	12	12	T	4	6	12	12	12

Shaft Types for Push-Lock (P09xP)

E-TYPE					F-TYPE					Q-TYPE				
														
L	25	30	35		L	25	30	35		L	25	30	35	
M	5.7	10.7	15.7		T	4.5	7	12		T	3	6	12	
					M	5.7	10.7	15.7		M	5.7	10.7	15.7	

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
413 Rood RD, Suite 7
Calexico, CA 92231
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

The diagrams illustrate four different CCW (Counter-Clockwise) positions for a 30°±10° angle. Each diagram shows a square with a circle inside, and a line indicating the angle. The positions are labeled as follows:


- POSITION TYPE C:** The line is at the top-left, and the angle is 30°±10°.
- POSITION TYPE A:** The line is at the top-right, and the angle is 30°±10°.
- POSITION TYPE D:** The line is at the bottom-left, and the angle is 30°±10°.
- POSITION TYPE B:** The line is at the bottom-right, and the angle is 30°±10°.

1K	2K	5K	10K	20K	50K	100K	200K	500K
----	----	----	-----	-----	-----	------	------	------


Issue B 04/2019 Page 3

Outline Drawings

Model P09xS (Side Adjust, PCB pins, up to 8 gangs, with Switch)

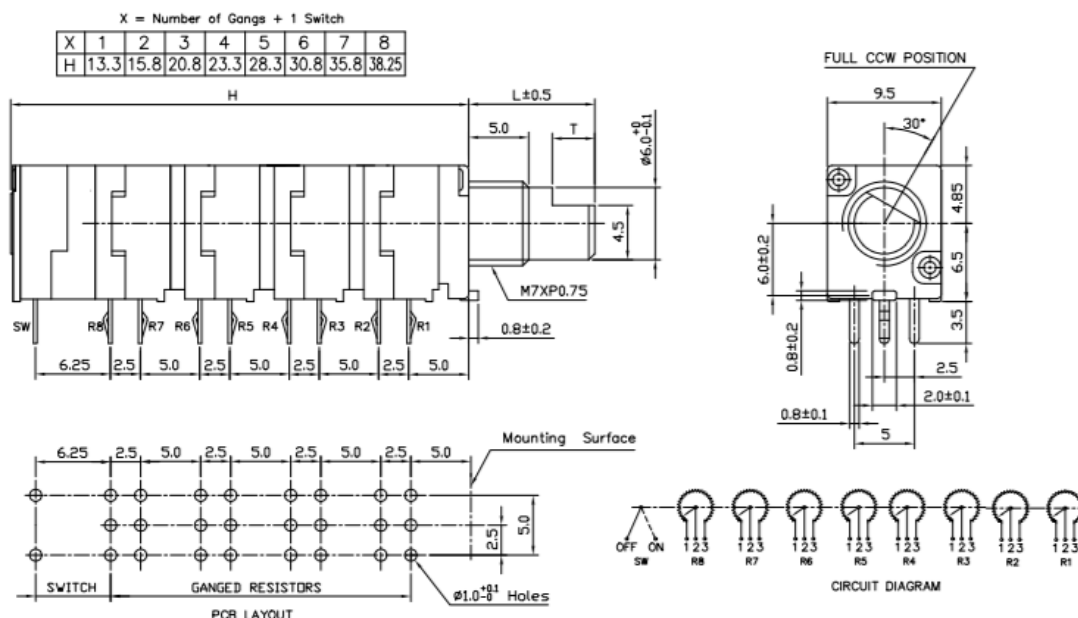

Model P09x5N (Top Adjust, PCB pins, up to 2 gangs)

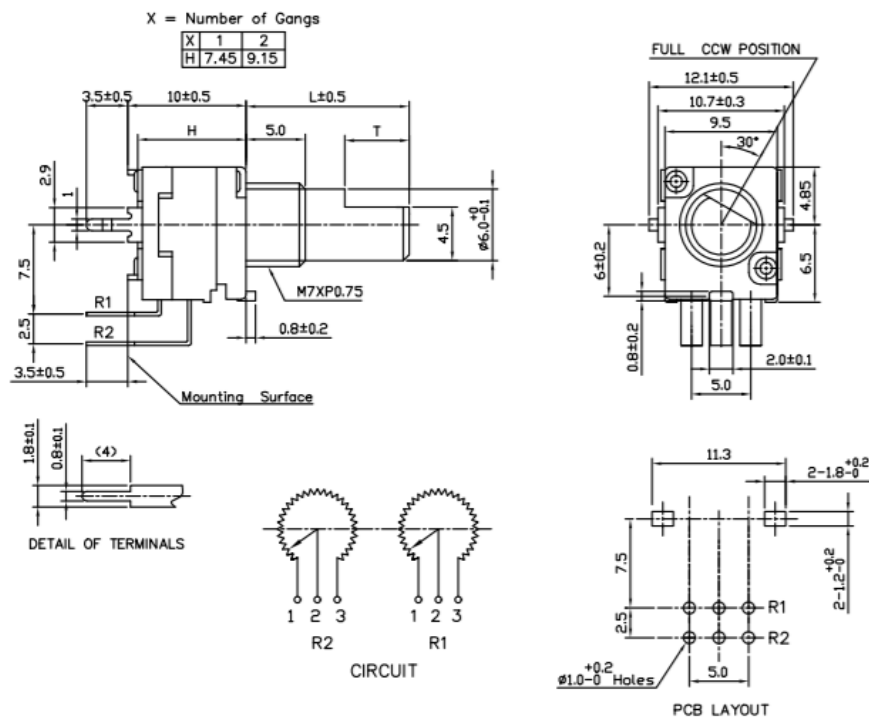

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
413 Rood RD, Suite 7
Calexico, CA 92231
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Outline Drawings

Model P09xP (Side Adjust, PCB pins, with Push-Lock, up to 2 gangs)

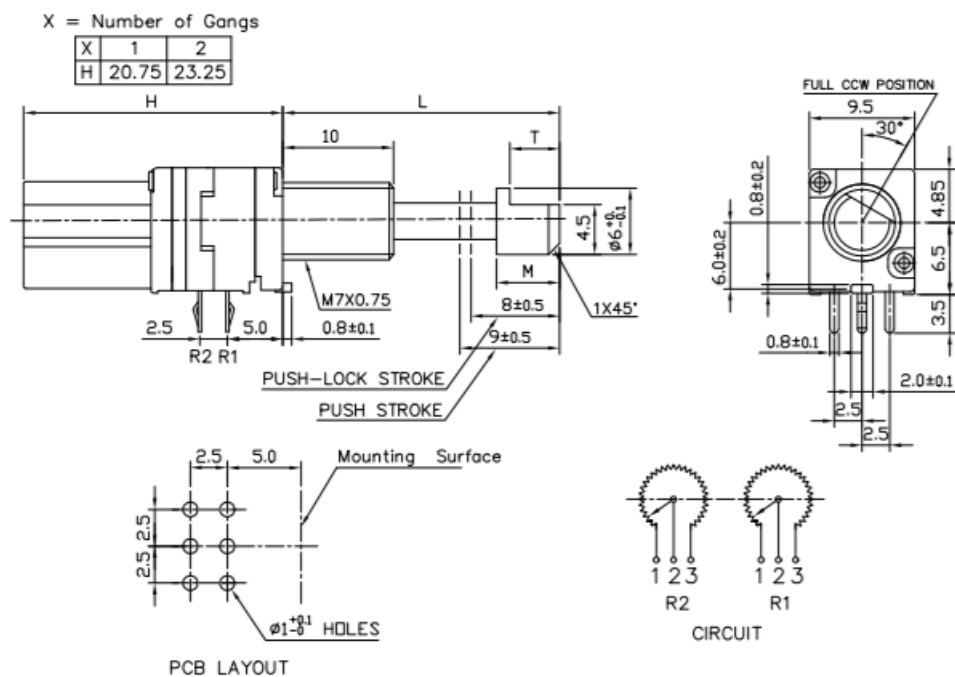

General Note





TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Outline Drawings



Model P09xC and P09xT (PCB pins with Concentric Shaft and Center Tap Options)

This Diagram shows both options

Please consult factory for details

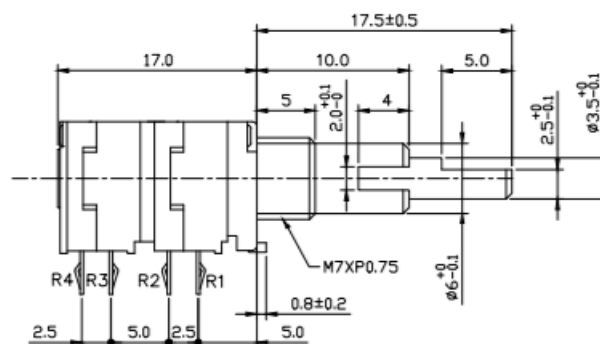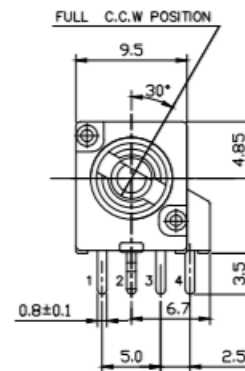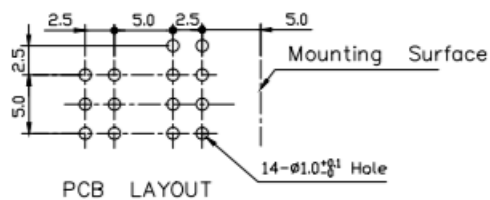

PANEL LAYOUT

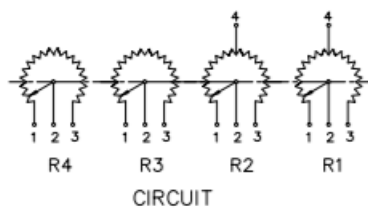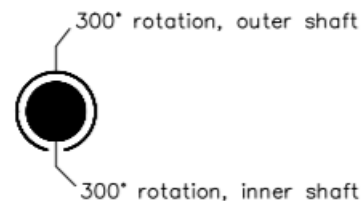

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies

413 Rood RD, Suite 7


415 Road RD, Suite 7
Calexico, CA 92231

Ph: +1 714 447 2345

www.ttelectronics.com/bi-technologies

Panel Potentiometer

Model P09x Series

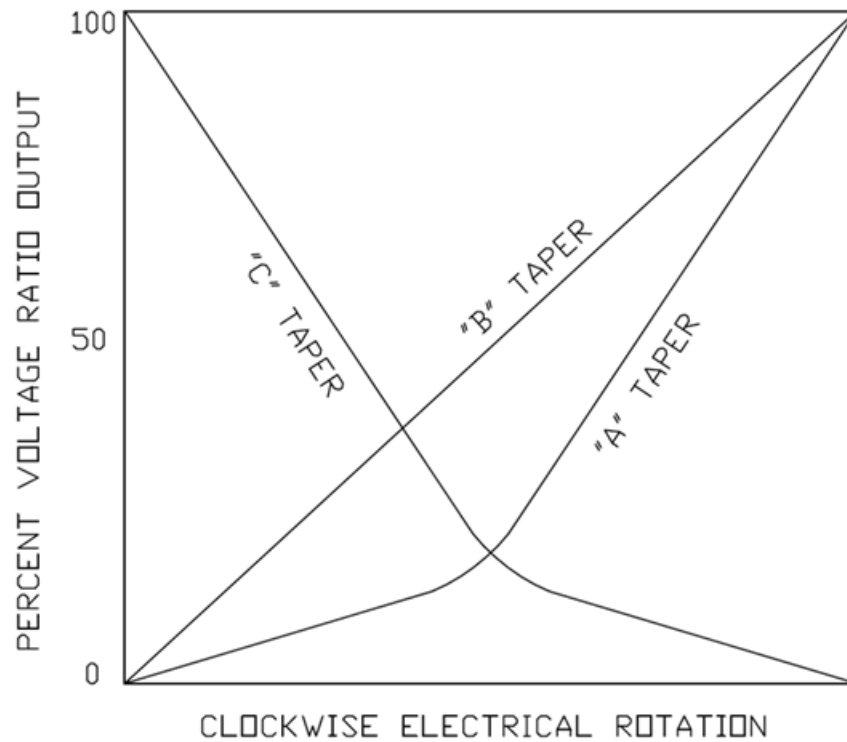

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
413 Rood RD, Suite 7
Calexico, CA 92231
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Issue B 04/2019 Page 7