


| P1K

Pressure Sensor

Description

The P1K series of pressure sensors incorporates a piezo-resistive sensing element in a compact package. Using a 5 VDC supply voltage, the P1K provides a 0.25 VDC to 4.0 VDC output proportional to pressure. Internal temperature compensation provides accurate, easy to use sensor. The industry standard terminal pins provides ease of use for your printed circuit board designs.

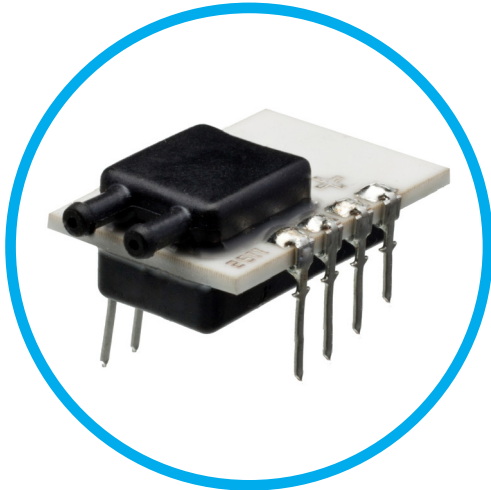

Features

- Compact Package
- Amplified Temperature Compensated Linear Output
- No Position Sensitivity Above 0-2" H₂O
- EMI/RFI and ESD Protected
- Superior Output Signal Stability
- Printed Circuit Board through Hole Mounting

Applications

- Variable Air Volume Systems
- Filter Pressure Monitoring
- Duct Air Flow
- Modulated Furnace Controls
- Combustion Airflow
- Gaseous Leak Detection
- **Medical Applications:**
Oxygen Concentrators, Ventilators, Anesthesia Equipment, CPAP, Wound Therapy.

MAIN FEATURES

Pressure Ranges	2, 5, 10, +/-1, +/-2, +/- 5 inches of water; 2.5, 5, 12.5, 25, +/-2.5, +/- 5, +/- 12.5 mbar
Electrical Connection	PCB thru hole terminal pins, 2.54 mm [.100 inch] pitch
Pressure Connection	Barbed port, 1.9[.08] diameter
Housing Material	PPS, 40% glass filled, black
Terminal Pin Material	Phosphor bronze, tin plated
Supply Voltage	5.00 Vdc $\pm$ 0.25 Vdc
Output Signal	Ratiometric analog; 5% to 80% of supply voltage



Pressure Ranges

from 0 to...	2" H2O	5" H2O	10" H2O	+/- 1" H2O	+/- 2" H2O	+/- 5" H2O
from 0 to...	5mbar	12.5mbar	20mbar	+/- 2.5 mbar	+/- 5mbar	+/- 12.5 mbar
Proof Pressure (min)	1.0 PSI/ (70mbar)	1.0 PSI/ (70mbar)	1.0 PSI/ (70mbar)	1.0 PSI/ (70mbar)	1.0 PSI/ (70mbar)	1.0 PSI/ (70mbar)
Burst Pressure Factor	1.8 PSI/ (125mbar)	1.8 PSI/ (125mbar)	1.8 PSI/ (125mbar)	1.8 PSI/ (125mbar)	1.8 PSI/ (125mbar)	1.8 PSI/ (125mbar)

Physical

Expected Operating Life	10 million full pressure life cycles
Shelf Life	10 years minimum
Stability	+/- 0.5% of full scale span for 1 year
Vibration	10 G's peak to peak sinusoidal (20 to 1600Hz)
Shock Resistance	50 G's ½ Sinewave, 11 mSec pulse, 18 pulses (6 per axis)
Weight	3.5g max.
Operating Temperature	-20°C to 85°C
Storage Temperature	-40°C to 125°C
Humidity	Up to 92% RH in a non-condensing environment
Media	Dry air

Performance

Accuracy	0.25% Max (% of full scale span) (RSS of linearity, hysteresis and repeatability)
Temp. Error (0 to 60°C)	0.05%/ C [% of full scale span]
Temp. Error (-20 to 0°C and 60 to 85°C 0 to 60°C)	5% full scale span

Electrical

Output Impedance	100 Ohms max.
Excitation Current	4mA max
Minimum Load	25k Ohms between output and ground
Response Time	5 mSec max (63% full scale)




Technical drawing of a mechanical assembly, showing two views: a front view (left) and a side view (right).

Front View Dimensions:

- Top feature spacing: 4.06 [.160]
- Total width: 13.34 [.525]
- Height: 7.1 [.28]
- Bottom gap: (0.25 [.010])

Side View Dimensions:

- Overall length: 21.4 [.84]
- Pin diameter: 2X Ø 1.9 [.08]
- Pin spacing (top): 2X 1.0 [.04]
- Pin spacing (middle): 2X 2.4 [.10]
- Pin spacing (bottom): 6X 2.54 [.100]
- Pin diameter (bottom): (8X 0.50 [.020])
- Vertical offset: 3.4 [.14]
- Vertical offset: 8X 7.90 [.311]

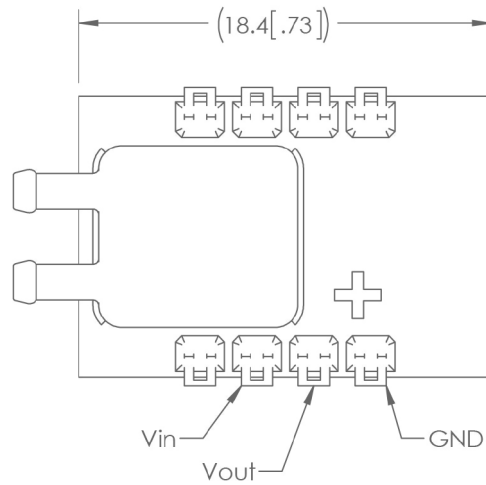



ORDERING OPTIONS

Example: P1K-1-2X16PA

P1K Pressure sensor 0 -1" H2O, .25 to 4.0 VDC output, no internal material seal, barbed tube fitting port with PCB Terminal Pin connection, no external material seal

Family	P1K	1	2	X	16	P	A
Pressure Ranges							
1B:	+/- 1" H2O						
2:	0-2" H2O						
2B:	+/- 2" H2O						
5:	0-5" H2O						
5B:	+/- 5" H2O						
10:	0-10" H2O						
2.5MBB:	0-2.5 mbar						
5MB:	0-5 mbar						
5MBB:	+/- 5 mbar						
12.5MB:	0-12.5 mbar						
12.5MBB:	+/-12.5 mbar						
25MB:	0-25 mbar						
Output Type							
2:	0.25 – 4.0 VDC						
Seal Material							
X:	None						
Pressure Connection							
16:	Barb or Tube Fitting						
Built-in Connector							
P:	PCB Terminal Pins						
Seal Material							
A:	None						



AGENCY APPROVALS & CERTIFICATIONS



Revised 4/10/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

Copyright © 2018 Sensata Technologies, Inc.

CONTACT US

Americas

+1 (800) 350 2727

sensors@sensata.com

switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826

pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006

ext 2808

www.sensata.com