
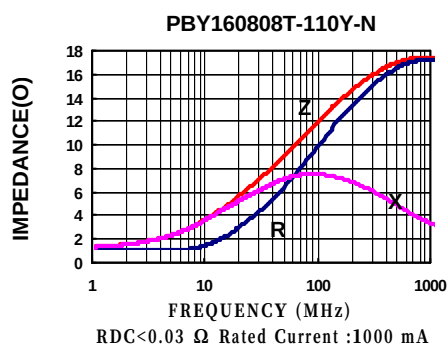
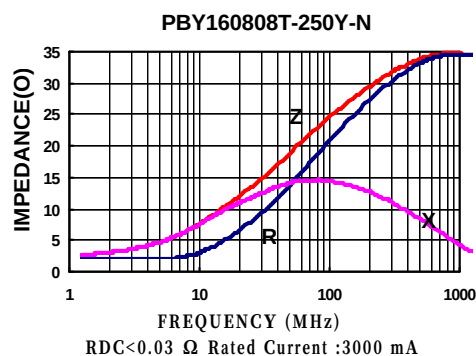
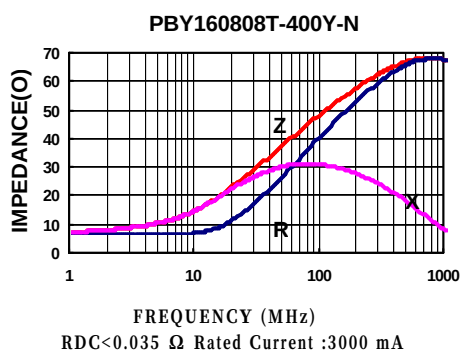


Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	D.C. Resistance (Ω) Max	Rated current (mA) Max
PBY160808T-060Y-N	100	6	0.080	2500
PBY160808T-070Y-N	100	7	0.085	2000
PBY160808T-110Y-N	100	11	0.020	4000
PBY160808T-250Y-N	100	25	0.030	3000
PBY160808T-400Y-N	100	40	0.035	3000
PBY160808T-600Y-N	100	60	0.040	3000
PBY160808T-121Y-N	100	120	0.080	2500
PBY160808T-151Y-N	100	150	0.085	2000
PBY160808T-181Y-N	100	180	0.090	2000
PBY160808T-201Y-N	100	200	0.095	2000
PBY160808T-301Y-N	100	300	0.120	1500
PBY160808T-501Y-N	100	500	0.150	1200
PBY160808T-601Y-N	100	600	0.200	1000
PBY160808T-102Y-N	100	1000	0.250	800
PBY160808T-122Y-N	100	1200	0.250	800
PBY160808T-152Y-N	100	1500	0.400	500

Test Instruments : HP4291A Impedance / Material Analyzer

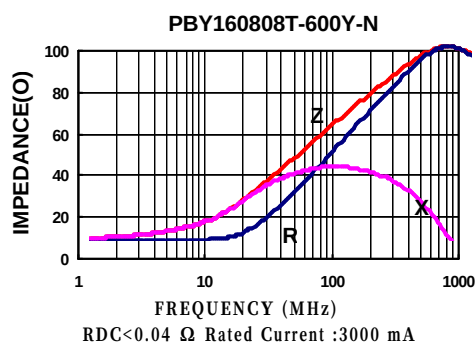

SMD Multilayer Ferrite Chip Beads – PB160808 Series

Test Instruments : HP4291A Impedance / Material Analyzer

