


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	02/23/17	L.CHAN
B	PER ECN07263	DEC25/17	L.CHAN
C	UPDATE DRAWING	NOV10/17	L.CHAN
D	MODIFY THE LAYOUT	JUL31/18	L.CHAN

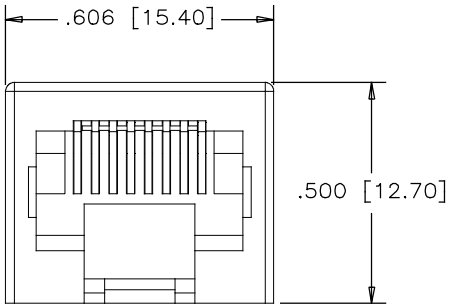

FRONT VIEW

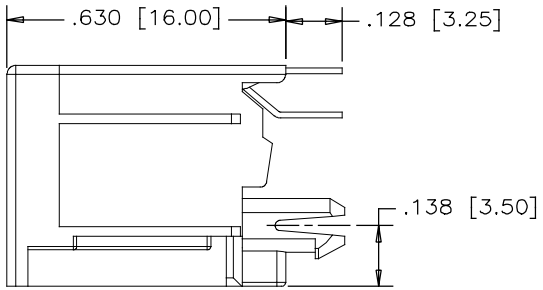

SIDE VIEW

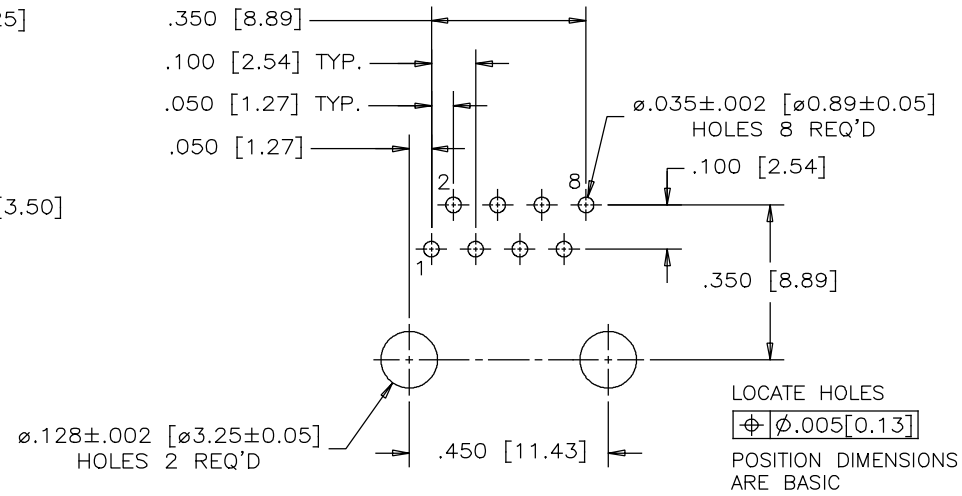


RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05 (TOP VIEW)

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V–0, COLOR: BLACK.

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
50 µ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100 µ" [2.54 MICRONS]
MIN. MATTE–TIN OR GOLD FLASH ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 240°C MAXIMUM FOR 5 SEC MAXIMUM

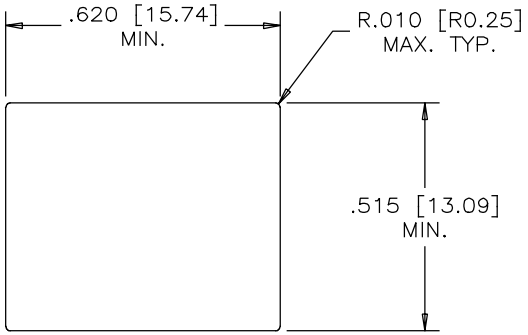

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJE06–188–0X10

GOLD PLATING:
1 = 6 µ"
2 = 15 µ"
3 = 30 µ"
4 = 50 µ"

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

UNLESS SPECIFIED OTHERWISE	DRAWN L.CHAN	DATE 02/23/01	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETER	CHECKED J.SI	02/23/01	
SECONDARY INCH	M.E. APP'D		TITLE: RJE06 SERIES, 8 POSITION 8 CONTACT, VERTICAL MOUNT, UNSHIELD WITHOUT FLANGE – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.38	ENG. REL. NO.		DWG. NO. P–RJE06–188–0X10 REV D
2 DECIMAL PLACES ±0.25	REF. EAR#: 11306		
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.