

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APRIL26/18	L.CHAN

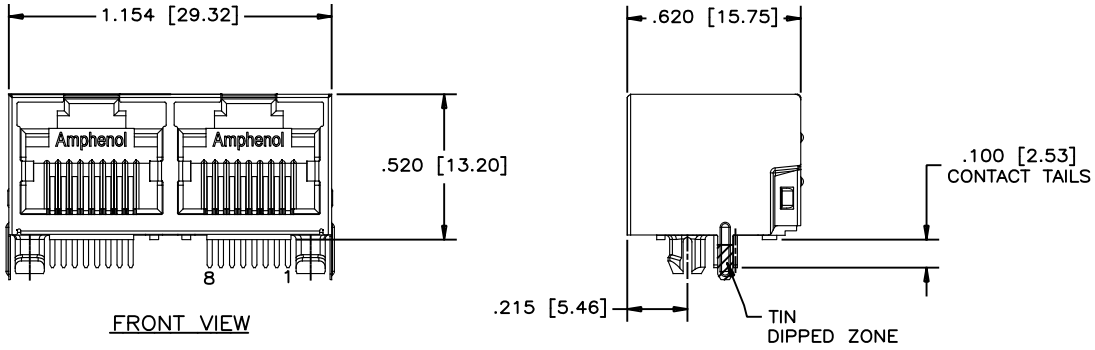


FRONT VIEW

SIDE VIEW

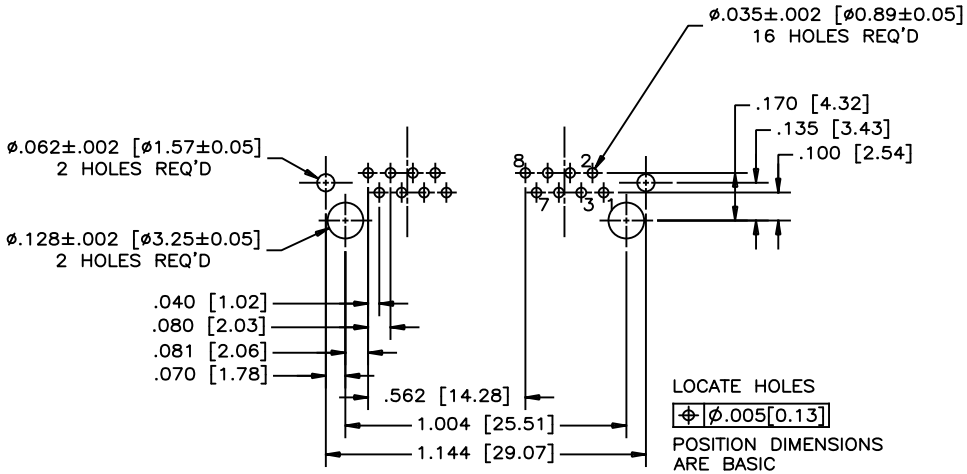

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

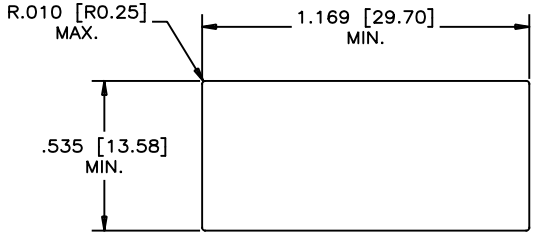

RECOMMENDED PANEL CUTOUT

1. MATERIALS:
   PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
   FLAMMABILITY RATING UL 94V–0, COLOUR: BLACK

   CONTACTS: PHOSPHOR BRONZE
   PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES,
   SEE AMPHENOL PART NUMBER FOR DETAIL.
   50 µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE
   100 µ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS

   SHIELD: STAINLESS STEEL WITH TIN DIPPED ON PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE:
   WAVE SOLDERING AT 260° C MAXIMUM FOR 5 SEC MAXIMUM.

3. PART NUMBER: RJE39–288–6X00

   GOLD PLATING OPTION
   0=GOLD FLASH
   1=6u" GOLD PLATING
   2=15u" GOLD PLATING
   3=30u" GOLD PLATING
   4=50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN AMY.Z	DATE APRIL26/18	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED LAWRENCE.C	APRIL26/18	
SECONDARY MILLIMETER	M.E. APP'D		TITLE: 2 PORT HIGH SPEED MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED W/O TABS, W/O LEDs OPTION – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		
2 DECIMAL PLACES ±0.020	REF.		DWG. NO. P–RJE39–288–6X00 REV A
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			